| WAAS | APP CRS | Rwy Idg | 6004 |
|---|---|---|---|
| CH 70416 | 246° | TDZE | 486 |
| W24A | | Apt Elev | 486 |

# RNAV (GPS) RWY 24

## LANCASTER COUNTY-MC WHIRTER FLD (LKR)

RNP APCH.

When VGSI inoperative Straight-in/Circling Rwy 24 procedure NA at night. Baro-VNAV NA when using Rock Hill altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 47°C. When local altimeter setting not received, use Rock Hill altimeter setting and increase LPV DA to 805 feet, LNAV/VNAV DA to 1086 feet, and all MDA 80 feet, increase LNAV Cat C and Circling Cats C and D visibility ¼ SM.

MISSED APPROACH: Climb to 2200 direct CORON and hold.

| AWOS-3 | CHARLOTTE APP CON | GCO | UNICOM |
|---|---|---|---|
| 120.825 | 120.05 307.8 | 121.725 | 122.725 (CTAF) L |

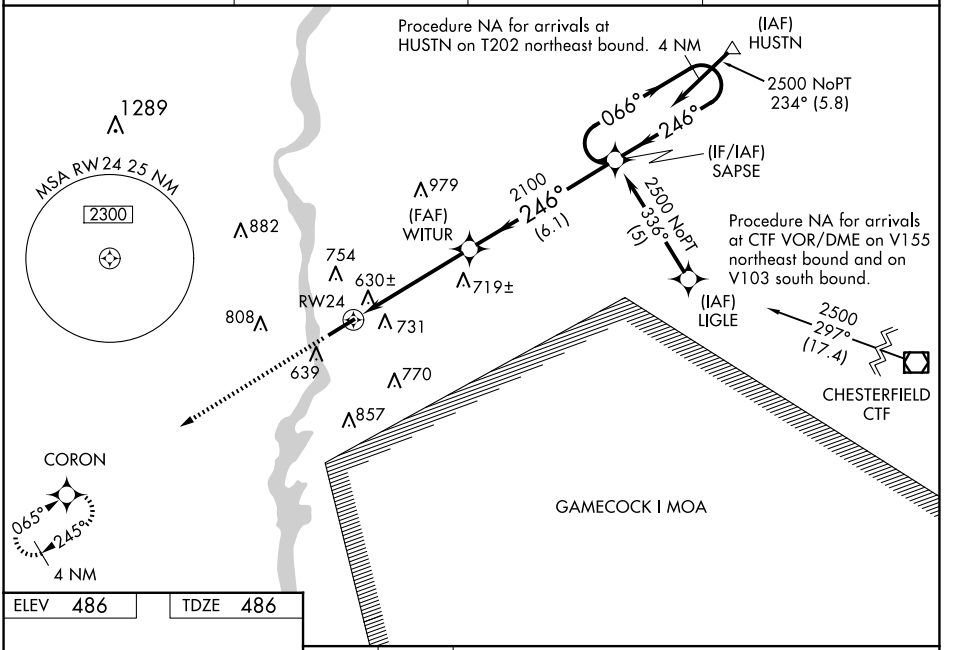


| ELEV | 486 | TDZE | 486 |
|---|---|---|---|




MIRL Rwy 6-24 L

REIL Rwys 6 and 24 L

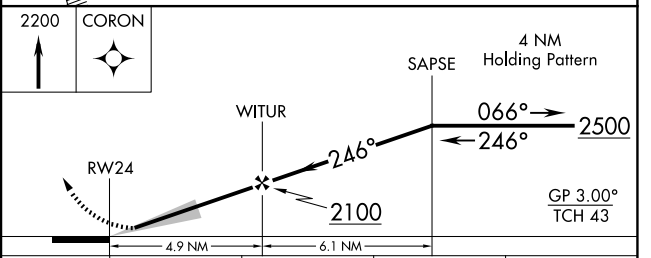


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 736-1 250 (300-1) | | | |
| LNAV/VNAV DA | 1017-2 531 (600-2) | | | |
| LNAV MDA | 960-1 474 (500-1) | | 960-1¼ 474 (500-1¼) | 960-1½ 474 (500-1½) |
| CIRCLING | 1040-1 554 (600-1) | 1060-1 574 (600-1) | 1120-1¾ 634 (700-1¾) | 1160-2¼ 674 (700-2¼) |



SE-2, 07 AUG 2025 to 04 SEP 2025
SE-2, 07 AUG 2025 to 04 SEP 2025