RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE: 3000

CHARLOTTE DEP CON
120.05 307.8
AWOS-3
120.825
GCO
121.725
UNICOM
122.725

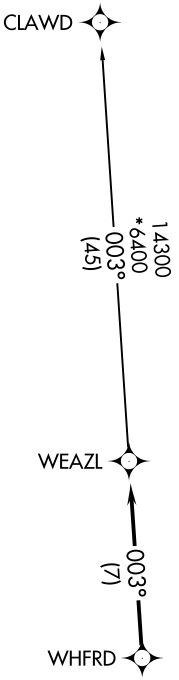

TAKEOFF MINIMUMS
Rwys 6, 24: Standard.

NOTE: For turbo jets only.
NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.



NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

Climb on heading assigned by ATC, on RADAR vectors to WHFRD, then on track 003° to WEAZL. Then on CLAWD Transition. Maintain 3000, expect clearance to filed altitude within 10 minutes after departure.

CLAWD TRANSITION (WEAZL5.CLAWD)

SE-2, 07 AUG 2025 to 04 SEP 2025
SE-2, 07 AUG 2025 to 04 SEP 2025