

WAAS CH 58322 W18A	APP CRS 178°	Rwy Idg TDZE Apt Elev	5005 140 140
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

CLEVELAND MUNI (RNV)



⚠


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Greenville altimeter setting and increase LPV DA to 438, LNAV/VNAV DA to 597, and all MDA 60 feet; increase LPV all Cats and LNAV Cats C/D visibility ½ mile, increase LNAV/VNAV all Cats visibility ¼ mile. Baro-VNAV and VDP NA when using Greenville altimeter setting. Rwy 18 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2100 direct
EWOP and hold.

AWOS-3PT 124.175	MEMPHIS CENTER 135.875 269.35	UNICOM 122.725 (CTAF) ①
----------------------------	---	-----------------------------------

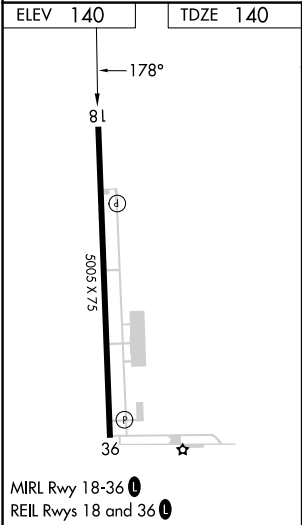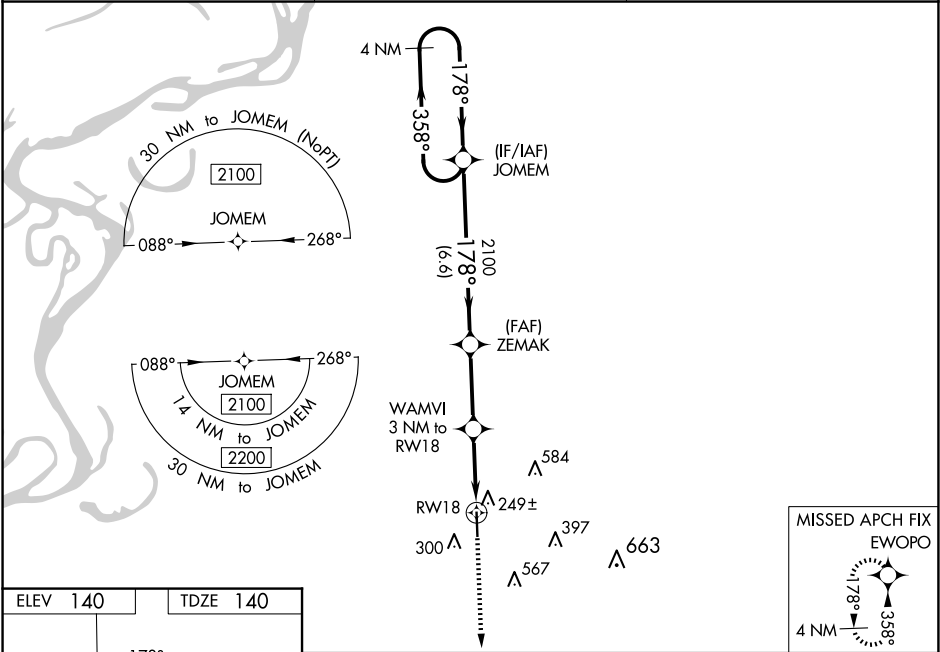

<div>4 NM Holding Pattern</div> <div><div><div>2100 ← 358°</div><div>178° →</div></div><div><div>GP 3.00°</div><div>TCH 42</div></div></div> <div><div>JOMEM</div><div>ZEMAK</div><div>WAMVI</div></div> <div><div>2100</div><div>2100</div><div>3 NM to RW18</div><div>*1 NM to RW18</div></div> <div><div>*LNNAV only.</div><div>RW18</div></div> <div><div>6.6 NM</div><div>3 NM</div><div>2 NM</div><div>1 NM</div></div>					<div>2100</div> <div>↑</div>	<div>EWOP0</div> <div>✦</div>
CATEGORY	A	B	C	D		
LPV DA	390-7 ⁸ / ₈ 250 (300-7 ⁸ / ₈)					
LNAV/VNAV DA	549-13 ⁸ / ₈ 409 (500-13 ⁸ / ₈)					
LNAV MDA	500-1 360 (400-1)					
<div> CIRCLING</div>	600-1	460 (500-1)	900-2 ¹ / ₄ 760 (800-2 ¹ / ₄)	900-2 ¹ / ₂ 760 (800-2 ¹ / ₂)		