LOC/DME I-OFP	APP CRS	Rwy Idg	5402
109.7	159°	TDZE	207
Chan 34		Apt Elev	207

LOC RWY 16
HANOVER COUNTY MUNI (OFP)

T A Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Richmond Intl altimeter setting and increase all MDAs 40 feet; increase LUKCI fix minimums S-16 Cat C visibility ⅛ SM.

MISSED APPROACH: Climb to 700 then climbing left turn to 2000 via RIC VORTAC R-345 to COATT INT and hold.

ASOS	POTOMAC APP CON	CLNC DEL	UNICOM
119.025	(001°-185°) 126.4 307.2 (186°-360°) 126.75 307.2	125.4	122.7 (CTAF) L

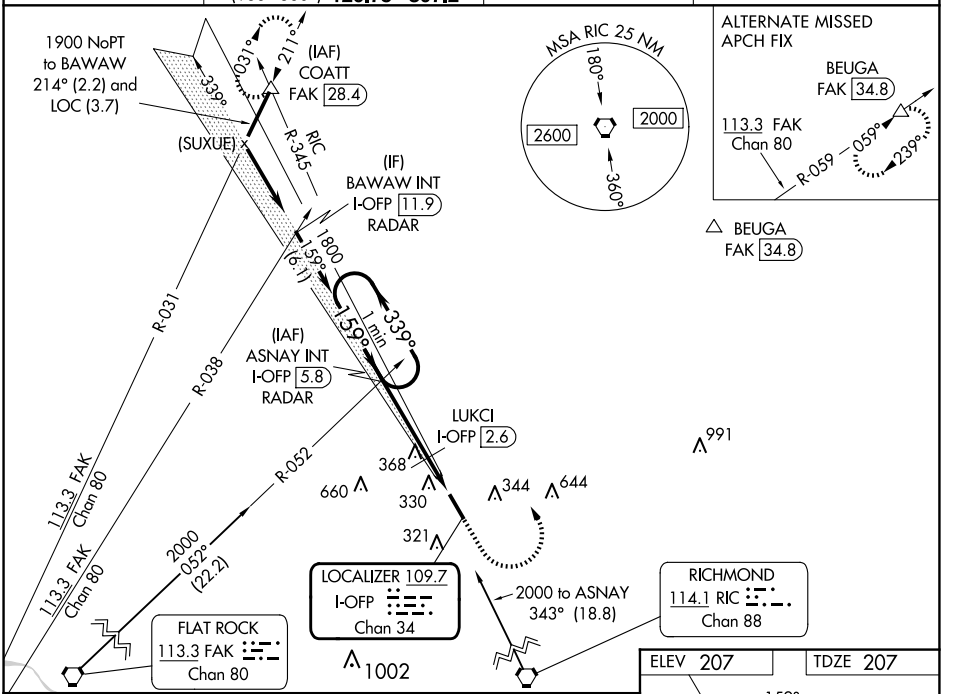

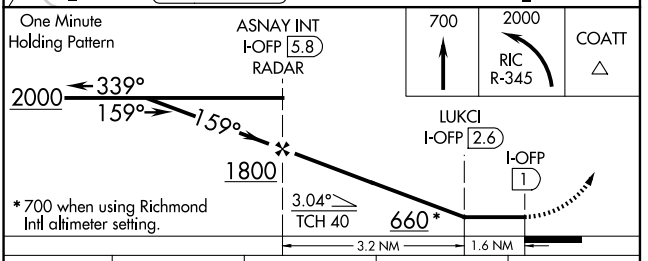

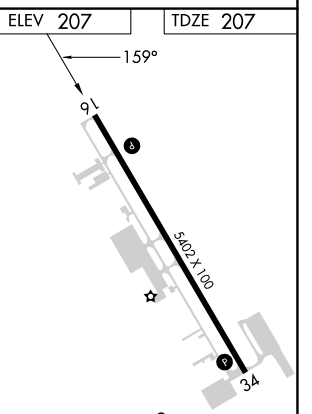

CATEGORY	A	B	C	D
S-16	660-1	453 (500-1)	660-1⅜ 453 (500-1⅜)	660-1½ 453 (500-1½)
C CIRCLING	660-1	453 (500-1)	900-2 693 (700-2)	1020-2¾ 813 (900-2¾)
	LUKCI FIX MINIMUMS			
S-16	560-1	353 (400-1)		560-1¼ 353 (400-1¼)
C CIRCLING	660-1	453 (500-1)	900-2 693 (700-2)	1020-2¾ 813 (900-2¾)

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

NE-3, 07 AUG 2025 to 04 SEP 2025
NE-3, 07 AUG 2025 to 04 SEP 2025