

RNP APCH.

▼

▲

Baro-VNAV and VDP NA when using Savannah/Hilton Head Intl altimeter setting.  
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). Rwy 29 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Savannah/Hilton Head Intl altimeter setting: increase LPV DA to 485 and LNAV/VNAV DA to 542; increase all MDA 140 feet and visibility LNAV Cat C ¾ SM, Cat D ½ SM, and Circling Cat C/D ½ SM. Inop table does not apply to LPV and LNAV/VNAV all Cats and LNAV Cats A/B. For inop ALS, increase LNAV Cat C visibility to 1½ SM. For inop ALS when using Savannah/Hilton Head Intl altimeter setting, increase LPV all Cats visibility to 1½ SM and LNAV/VNAV all Cats visibility to 1¾ SM.


MALSF

▲

▬

MISSED APPROACH:  
Climb to 2700 direct KOGSE and hold.

AWOS-3PT <b>118.125</b>	JACKSONVILLE CENTER <b>126.75 277.4</b>	UNICOM <b>122.8 (CTAF) 0</b>
----------------------------	--	---------------------------------

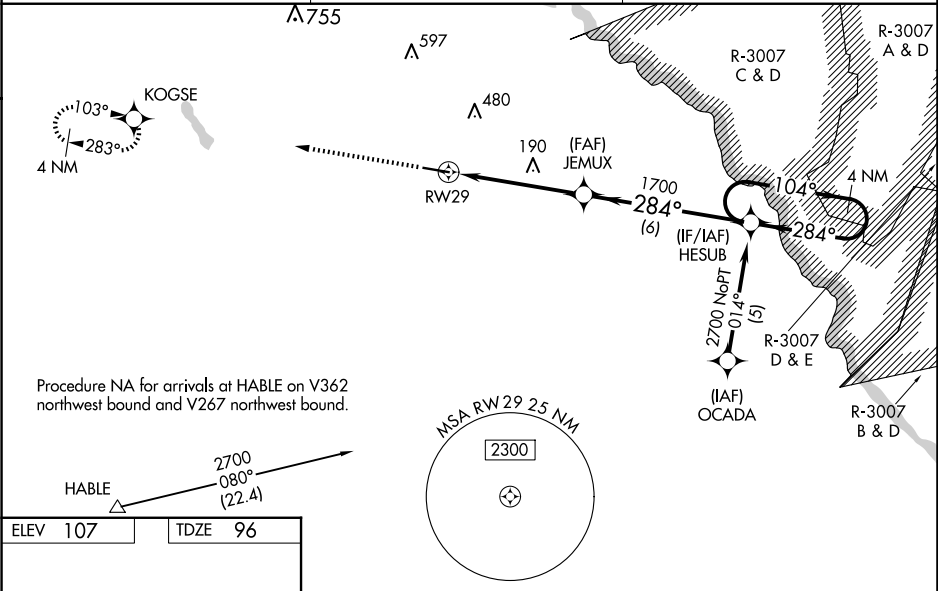

ELEV 107

TDZE 96

2700 KOGSE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 37).

4 NM Holding Pattern

284° to RWY29

5500 X 100

0.7% UP

284°

1700

284°

104°

2700

GP 3.00° TCH 45

CATEGORY	A	B	C	D
LPV DA		364-1	268 (300-1)	
LNAV/VNAV DA		421-1¼	325 (400-1¼)	
LNAV MDA		500-1 404 (400-1)		500-1¼ 404 (400-1¼)
CIRCLING	520-1 413 (500-1)	560-1 453 (500-1)	780-2 673 (700-2)	780-2¼ 673 (700-2¼)