


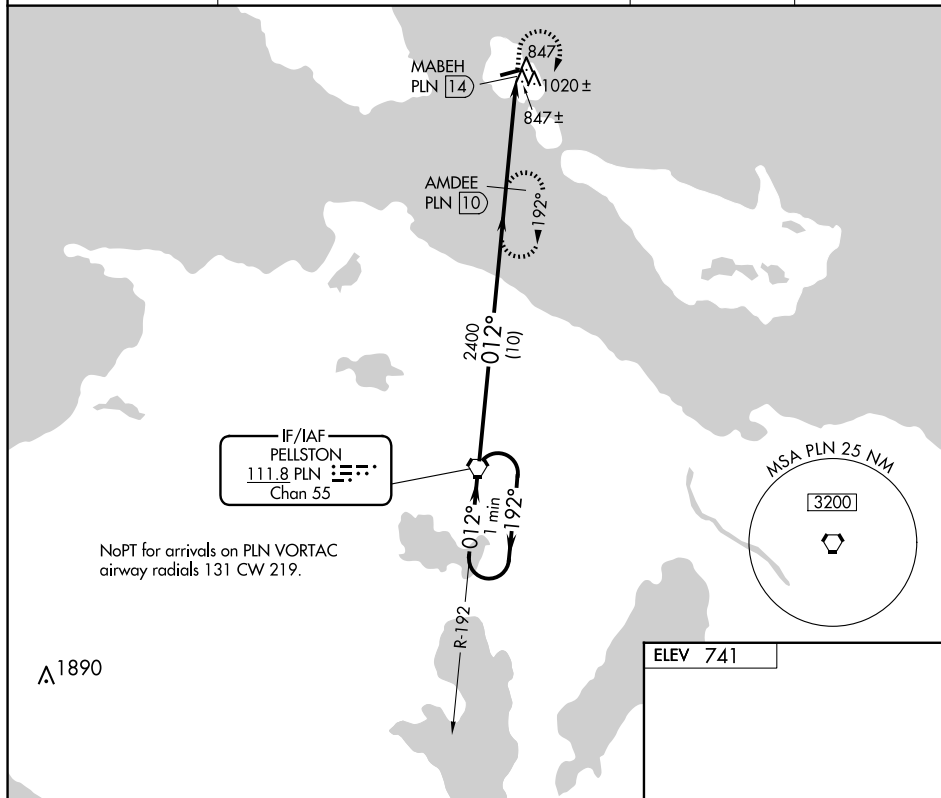
VORTAC PLN 111.8 Chan 55	APP CRS 012°	Rwy Idg TDZE Apt Elev	N/A N/A 741
--	------------------------	-----------------------------	--

VOR/DME-A
MACKINAC ISLAND (MCD)

T When local altimeter setting not received, use Pellston altimeter setting and increase all MDA 60 feet, increase Cat C visibility $\frac{1}{4}$ mile.
A Visibility reduction by helicopters NA. Night landing: Rwy 8 NA.

MISSED APPROACH: Climb to 1400 then climbing right turn to 2400 direct AMDEE 10 DME and hold.

AWOS-3 118.275	MINNEAPOLIS CENTER 134.6 354.05	UNICOM 122.7 (CTAF)	122.8 
--------------------------	---	-------------------------------	--



One Minute Holding Pattern

PLN VORTAC

AMDEE PLN 10

MABEH PLN 14

2500

192°

012°

012°

2400

10 NM

4 NM

3501 X 75

0.4% UP

012°

MRL Rwy 8-26

REIL Rws 8 and 26