RNAV (GPS) RWY 23

KYLE-OAKLEY FLD (CEY)

WAAS	APP CRS	Rwy Idg	6202
Ch 42626	232°	TDZE	568
W23A		Apt Elev	577

T

A DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA with Mayfield altimeter setting. When local altimeter setting not received use Mayfield altimeter setting: increase all DA/MDA 40 feet, and increase LPV, LNAV/VNAV all Cats, and LNAV Cats C and D visibility ⅛ mile. For inop ODALS, increase LPV and LNAV/VNAV all Cats, and LNAV Cats C and D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).

ODALS

MISSED APPROACH: Climb to 3000 direct EKACY and hold.

AWOS-3	MEMPHIS CENTER	UNICOM
119.975	133.65 292.15	122.7 (CTAF) L

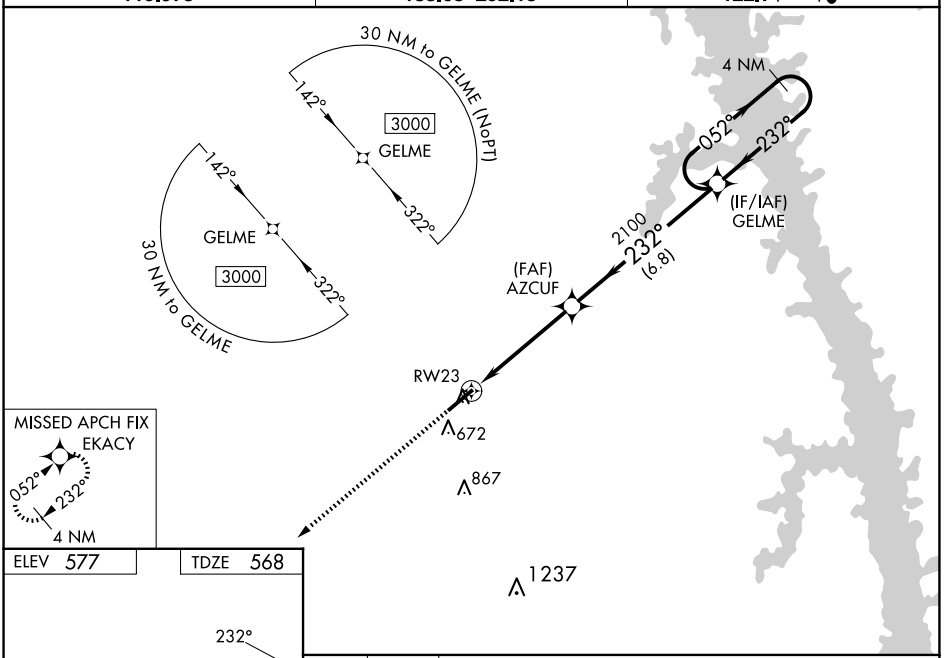

ELEV 577	TDZE 568



MIRL Rwy 5-23 L
REIL Rwy 5 L

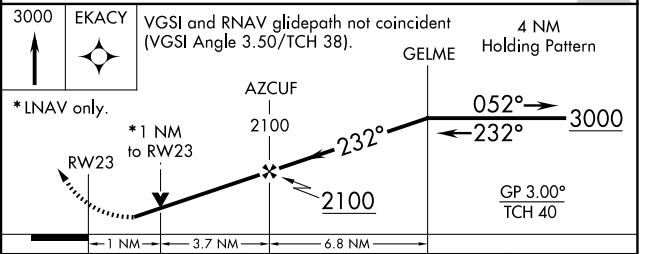

CATEGORY	A	B	C	D
LPV DA	859-⅞	291 (300-⅞)		
LNAV/VNAV DA	861-⅞	293 (300-⅞)		
LNAV MDA	980-¾	412 (500-¾)	980-1	412 (500-1)
C CIRCLING	1000-1	1040-1	1040-1½	1180-2
	423 (500-1)	463 (500-1)	463 (500-1½)	603 (700-2)

SE-1, 07 AUG 2025 to 04 SEP 2025
SE-1, 07 AUG 2025 to 04 SEP 2025