


WAAS CH <b>97533</b> <b>W19A</b>	APP CRS <b>193°</b>	Rwy Ldg TDZE <b>857</b> Apt Elev <b>858</b>
--	------------------------	---

RNAV (GPS) RWY 19



KEWANEE MUNI (EZI)

RNP APCH - GPS.	Baro-VNAV NA. Use Galesburg altimeter setting. When local altimeter setting not received, use Moline altimeter setting and increase LPV DA to 1212 feet; increase LNAV/VNAV DA to 1446 feet and all visibilities 1/8 SM. Increase all MDAs 40 feet and LNAV visibility Cat C 1/8 SM, and Circling visibility Cat C 1/4.	MISSED APPROACH: Climb to 2400 direct JUBDI and hold.
-----------------	---	--

QUAD CITY APP CON ★ <b>133.275 257.8</b>	UNICOM <b>122.8 (CTAF) 0</b>
---	---------------------------------

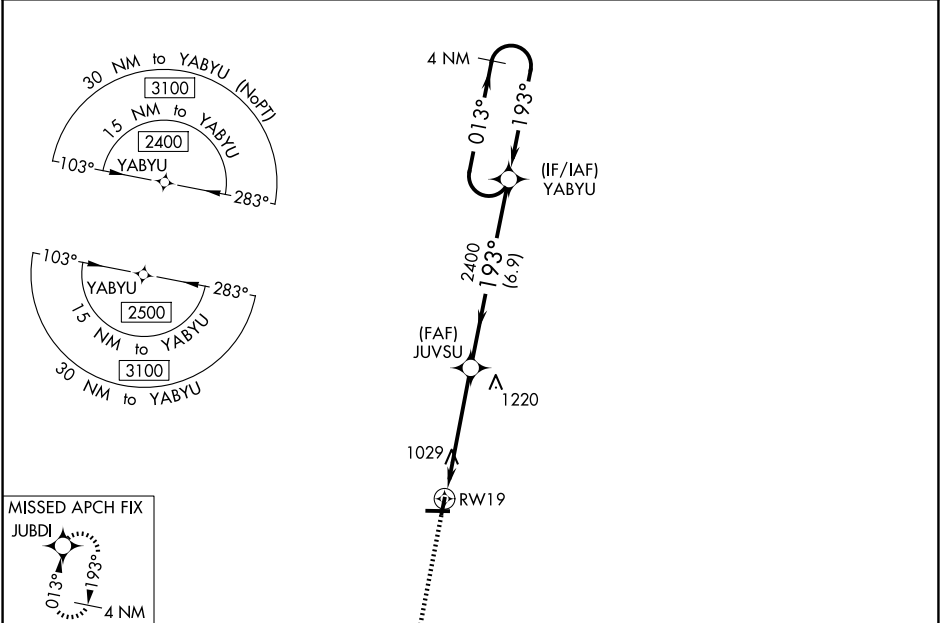

ELEV <b>858</b>	TDZE <b>857</b>
-----------------	-----------------

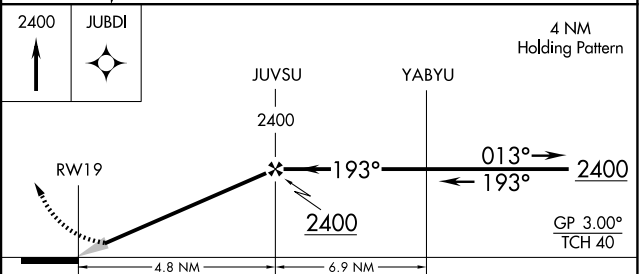

CATEGORY	A	B	C	D
LPV DA	1182-1	325 (400-1)		NA
LNAV/VNAV DA	1416-1 5/8	559 (600-1 1/8)		NA
LNAV MDA	1400-1	543 (600-1)	1400-1 5/8 543 (600-1 1/8)	NA
CIRCLING	1400-1 542 (600-1)	1520-1 662 (700-1)	1520-1 3/4 662 (700-1 3/4)	NA