# RNAV (GPS) RWY 27

KEWANEE MUNI (EZI)

| WAAS | APP CRS | Rwy Ldg | 4500 |
|---|---|---|---|
| CH 56433 | 273° | TDZE | 858 |
| W27A | | Apt Elev | 858 |

RNP APCH - GPS.

T A NA Baro-VNAV NA. Use GBG altimeter setting; when not received use MLI altimeter setting and increase LPV DA to 1213 feet, LNAV/VNAV DA to 1242 feet and all visibilities ⅛ SM; increase all MDAs 40 feet and LNAV visibility Cat C ⅛ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 2500 direct WIKOK and hold.

| QUAD CITY APP CON ★ | UNICOM |
|---|---|
| 133.275 257.8 | 122.8 (CTAF) L |







Procedure NA for arrivals at WYNET on V8 and V38 eastbound.

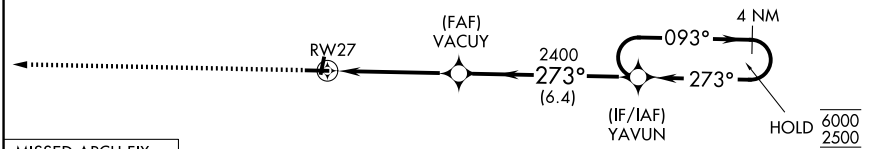








Procedure NA for arrivals at VICKS on V434 northwest bound and V10 southeast bound.

| ELEV 858 | TDZE 858 |
|---|---|




MIRL Rwys 1-19 and 9-27 L

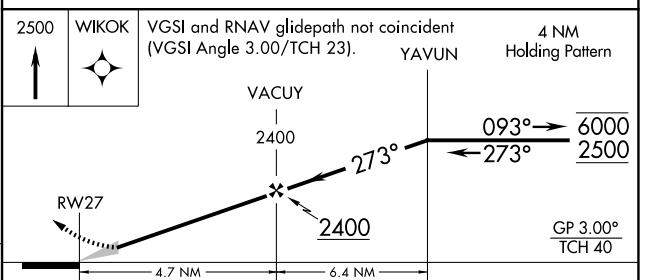


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1183-1 325 (400-1) | | | NA |
| LNAV/VNAV DA | 1212-1 354 (400-1) | | | NA |
| LNAV MDA | 1380-1 522 (600-1) | | 1380-1½ 522 (600-1½) | NA |
| CIRCLING | 1380-1 522 (600-1) | 1520-1 662 (700-1) | 1520-1¾ 662 (700-1¾) | NA |



EC-3, 07 AUG 2025 to 04 SEP 2025
EC-3, 07 AUG 2025 to 04 SEP 2025