RNAV (GPS) RWY 24

MUHLENBERG COUNTY (M21)

WAAS	APP CRS	Rwy Idg	4600
CH 99627	239°	TDZE	425
W24A		Apt Elev	428

RNP APCH - GPS.

NA

When local altimeter setting not received, use Owensboro altimeter setting and increase all MDAs 80 feet. Increase LP Cats C/D visibility ⅜ SM and LNAV Cats C/D and Circling Cats C/D visibility ¼ SM. Procedure NA at night. Rwy 24, helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 direct JEPAX and hold.

AWOS-3	CAMPBELL APP CON ★	UNICOM
120.45	118.1 269.525	123.0 (CTAF) L

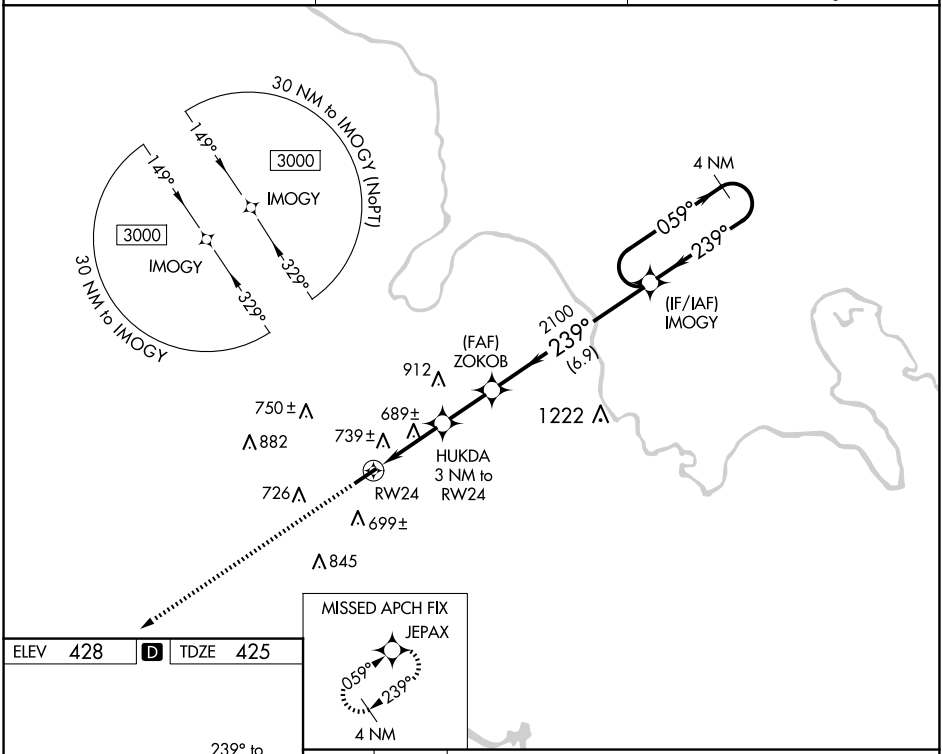

ELEV 428 D TDZE 425

MISSED APCH FIX



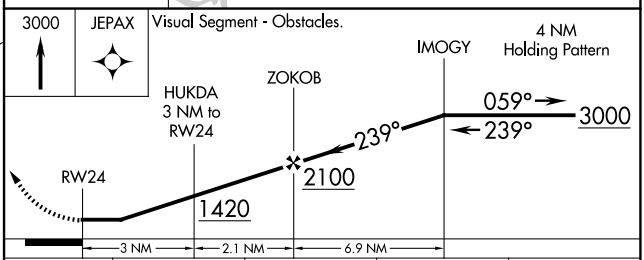

CATEGORY	A	B	C	D
LP MDA	940-1	515 (600-1)	940-1⅜	515 (600-1⅜)
LNAV MDA	1000-1	575 (600-1)	1000-1⅝	575 (600-1⅝)
C CIRCLING	1040-1 612 (700-1)	1100-1 672 (700-1)	1180-2¼ 752 (800-2¼)	1200-2½ 772 (800-2½)

MIRL Rwy 6-24 L
REIL Rwys 6 and 24 L

SE-1, 07 AUG 2025 to 04 SEP 2025
SE-1, 07 AUG 2025 to 04 SEP 2025