

WAAS CH 72630 W11A	APP CRS 111°	Rwy Idg TDZE 1152 Apt Elev 1171	5001
--	------------------------	---	-------------

RNAV (GPS) RWY 11

IOWA COUNTY (MRJ)

RNP APCH - GPS.


▼

▲

Baro-VNAV and VDP NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Platteville altimeter setting and increase LPV and LNAV/VNAV DA to 1457 feet; increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 3600 direct YECNU and hold.

AWOS-3 118.525	CHICAGO CENTER 133.95 281.4	UNICOM 122.8 (CTAF) 1
--------------------------	---------------------------------------	---------------------------------

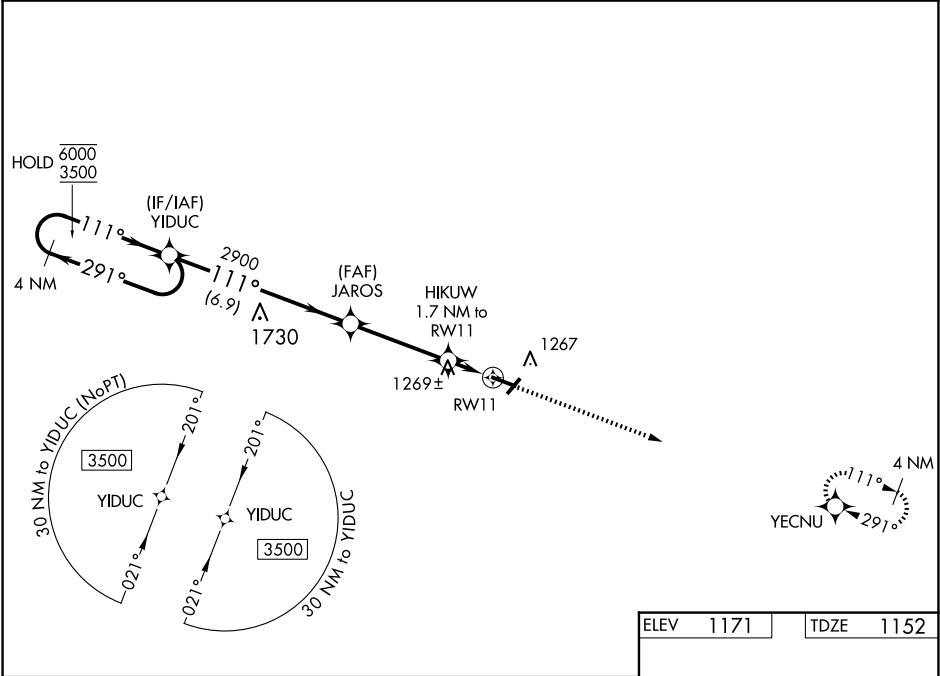

4 NM Holding Pattern

YIDUC

6000
3500

291°

111°

GP 3.00°
TCH 40

JAROS

2900

HIKUW

1.7 NM to RW11

1.1 NM to RW11

1700

6.9 NM

3.7 NM

0.6

1.1 NM

3600

YECNU

CATEGORY	A	B	C	D
LPV DA	1402-1	250 (300-1)		NA
LNAV/VNAV DA	1402-1	250 (300-1)		NA
LNAV MDA	1520-1	368 (400-1)		NA
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1½ 469 (500-1½)	NA

ELEV 1171

TDZE 1152

111°

0.7% UP

5001 X 75

3600 X 60

291°

MIRL Rwy 4-22 and 11-29 1