

LOC I-MQJ <u>108.7</u>	APP CRS 252°	Rwy Idg 6005 TDZE 860 Apt Elev 862
----------------------------------	------------------------	---


ILS or LOC RWY 25
INDIANAPOLIS RGNL (MQJ)

T When local altimeter setting not received, use Indianapolis
A Int'l altimeter setting and increase all DA 55 feet and all
 NA MDA 60 feet, increase S-LOC 25 Cats C/D visibility
 1/8 mile and Circling Cat D visibility 1/4 mile.

MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 2400 on SHB VOR/DME R-334 to SHB VOR/DME and hold.

AWOS-3PT 124.175	INDIANAPOLIS APP CON 127.15 317.8	CLNC DEL 119.25	UNICOM 122.975 (CTAF) ①
----------------------------	---	---------------------------	-----------------------------------

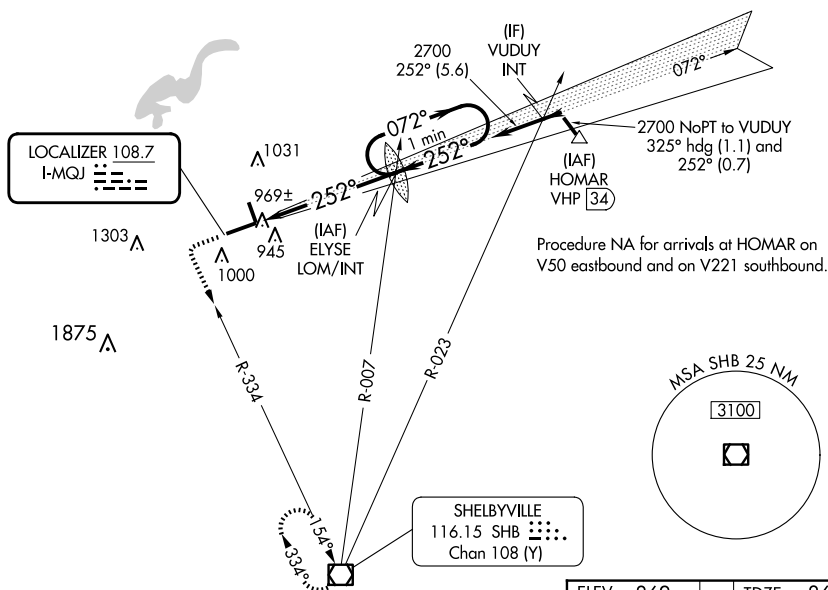

1400	2400	SHB
	SHB R-334	

ELYSE LOM/INT
2660

One Minute Holding Pattern

072° →


← 252°

2700

2700

GS 3.00°
TCH 53

5.4 NM

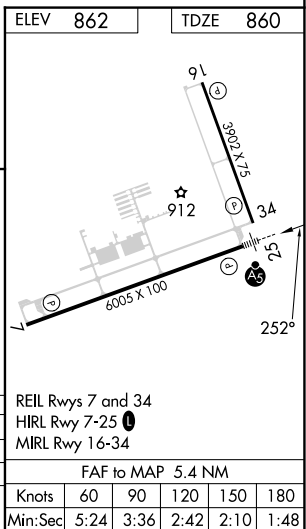

CATEGORY	A	B	C	D
S-ILS 25	1060-1/2 200 (200-1/2)			
S-LOC 25	1220-1/2 360 (400-1/2)		1220-5/8 360 (400-5/8)	
C CIRCLING	1340-1 478 (500-1)		1360-1 1/2 498 (500-1 1/2)	1660-2 1/2 798 (800-2 1/2)