

WAAS CH <b>78215</b> <b>W13A</b>	APP CRS <b>134°</b>	Rwy Idg TDZE Apt Elev	<b>4012</b> <b>837</b> <b>841</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

OSKALOOSA MUNI (00A)

RNP APCH.


▼

⚠

When local altimeter setting not received, use Ottumwa altimeter setting and increase all DA 18 feet and all MDA 20 feet and increase LNAV/VNAV all Cats visibility ¼ mile. Baro-VNAV and VDP NA when using Ottumwa altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 54°C (130°F).

MISSED APPROACH: Climb to 3000 direct HONPA and hold.

AWOS-3 <b>118.625</b>	CHICAGO CENTER <b>118.15 335.575</b>	UNICOM <b>122.8 (CTAF) 0</b>
--------------------------	---	---------------------------------

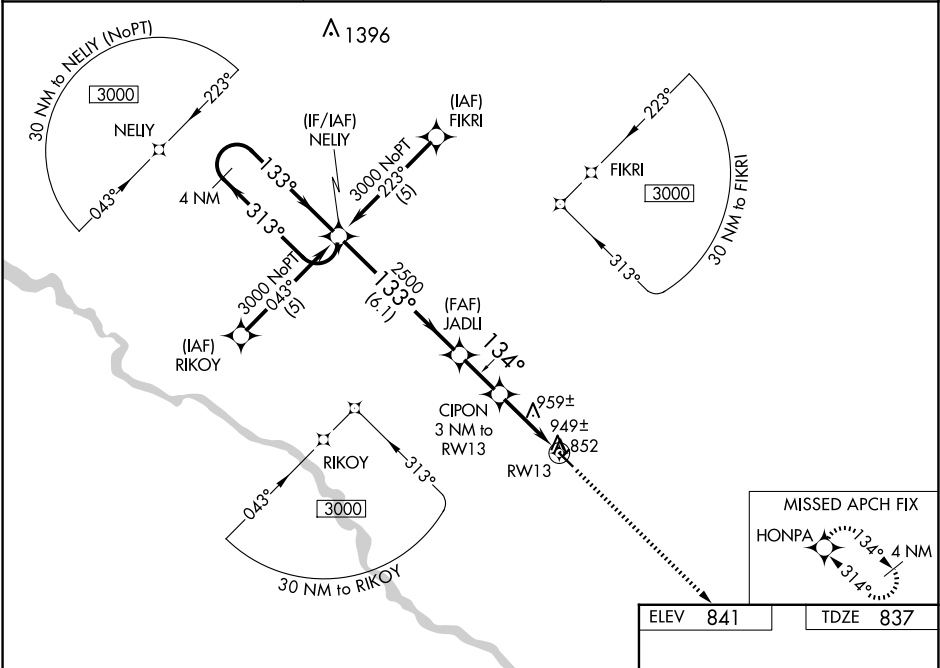

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 22).		3000	HONPA
NELLY		JADLI		CIPON 3 NM to RW13	* LNAV only
3000 ← 313°		→ 133°		* 1.1 NM to RW13	
GP 3.00°		2500		RW13	
TCH 40		* 1820		1.9	
		6.1 NM		2 NM	
CATEGORY	A	B	C	D	
LPV DA	1193-1¼	356 (400-1¼)		NA	
LNAV/VNAV DA	1219-1¼	382 (400-1¼)		NA	
LNAV MDA	1220-1	383 (400-1)		NA	
CIRCLING	1260-1 419 (500-1)	1300-1 459 (500-1)	1300-1½ 459 (500-1½)	NA	

