# RNAV (GPS) RWY 11

## LEBANON SPRINGFIELD-GEORGE HOERTER FLD (6I2)

| WAAS | APP CRS | Rwy Idg | 4876 |
|---|---|---|---|
| CH 45722 | 110° | TDZE | 854 |
| W11A | | Apt Elev | 871 |

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Danville altimeter setting and increase all DA 74 feet and all MDA 80 feet. Increase LPV, LNAV/VNAV, and Circling Cat D visibility ¼ mile and LNAV Cats C/D ⅜ mile. Baro-VNAV NA when using Danville altimeter setting.

MISSED APPROACH: Climb to 4000 direct WOBIL and hold, continue climb-in-hold to 4000.

| AWOS-3P | LOUISVILLE APP CON | UNICOM |
|---|---|---|
| 119.725 | 132.075 327.0 | 122.8 (CTAF) L |

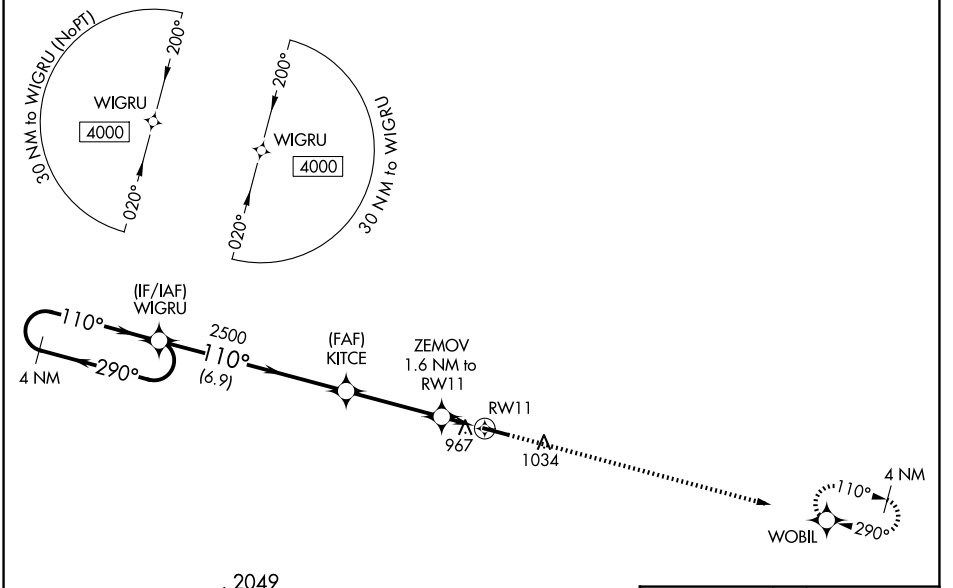


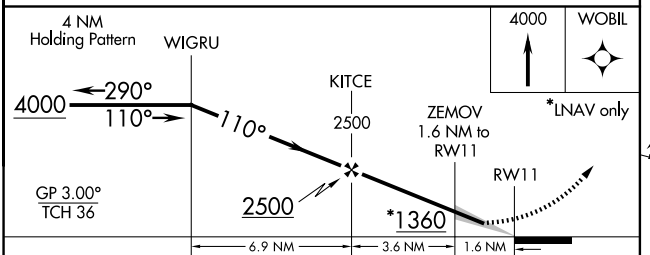





ELEV 871 TDZE 854

| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | | 1104-1 | 250 (300-1) | |
| LNAV/VNAV DA | | 1159-1⅛ | 305 (300-1⅛) | |
| LNAV MDA | | 1220-1 | 366 (400-1) | |
| C CIRCLING | 1320-1<br>449 (500-1) | 1340-1<br>469 (500-1) | 1360-1½<br>489 (500-1½) | 1500-2<br>629 (700-2) |

MIRL Rwy 11-29 L
REIL Rwys 11 and 29 L



SE-1, 07 AUG 2025 to 04 SEP 2025
SE-1, 07 AUG 2025 to 04 SEP 2025