WAAS	APP CRS		
CH **93804**	**176°**	Rwy Idg	**5201**
W18A		TDZE	**1277**
		Apt Elev	**1277**

RNAV (GPS) RWY 18
WELLINGTON MUNI (EGT)

RNP APCH - GPS.

T A Baro-VNAV and VDP NA when using ICT altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use ICT altimeter setting: increase LPV DA to 1530 feet; increase LNAV/VNAV DA to 1775 feet; increase all MDAs 60 feet and LNAV Cats C/D visibility ⅛ SM and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 3000 direct GOLMN and hold.

AWOS-3P	WICHITA APP CON	UNICOM
118.875	**134.85**	**122.8** (CTAF) L

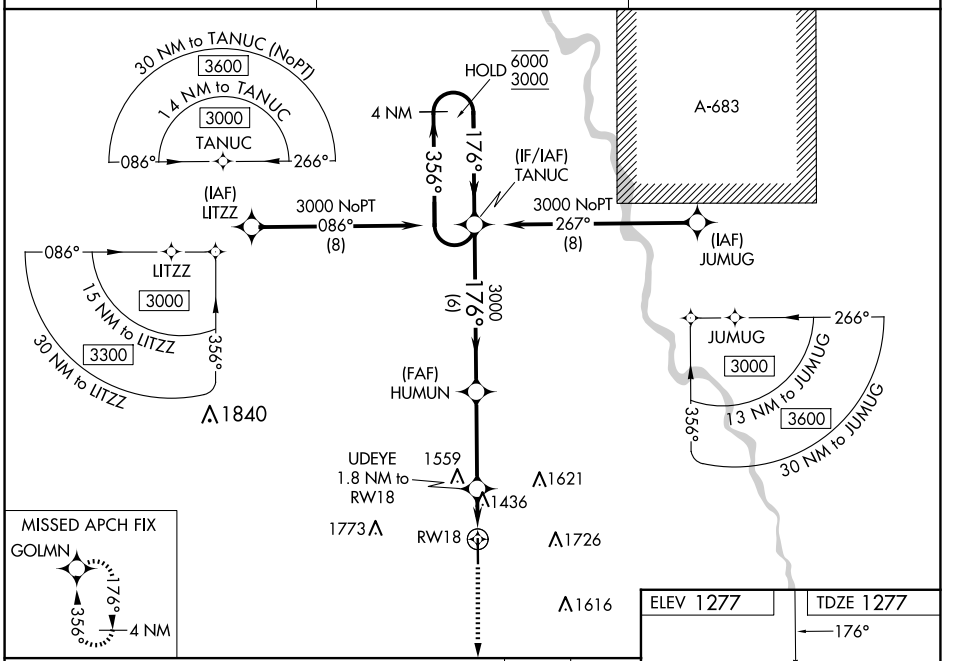

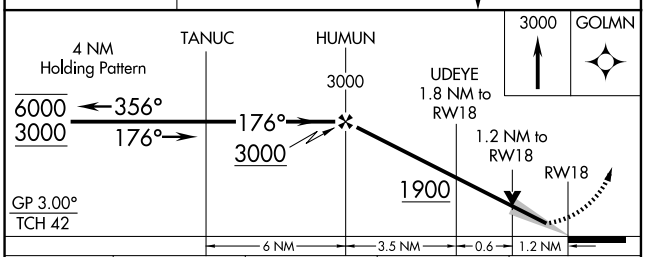

CATEGORY	A	B	C	D
LPV DA	1477-1 200 (200-1)			
LNAV/VNAV DA	1722-1⅜ 445 (500-1⅜)			
LNAV MDA	1700-1 423 (500-1)		1700-1¼ 423 (500-1¼)	
C CIRCLING	1760-1 483 (500-1)		2040-2¼ 763 (800-2¼)	2140-2¾ 863 (900-2¾)

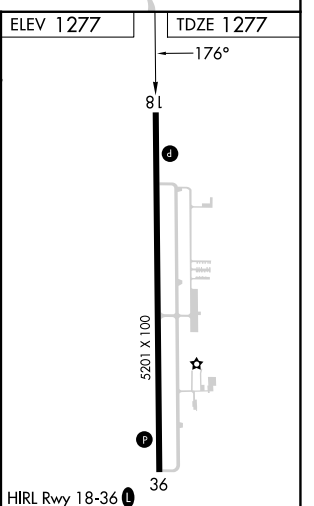

NC-2, 07 AUG 2025 to 04 SEP 2025
NC-2, 07 AUG 2025 to 04 SEP 2025