


WAAS CH 63135 W32A	APP CRS 323°	Rwy Idg TDZE 1800 Apt Elev 1800
----------------------------------------	------------------------	-----------------------------------------------------

RNAV (GPS) RWY 32


SMITH CENTER MUNI (K82)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3900 direct LAYIP and hold.
⚠ Baro-VNAV and VDP NA when using CNK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use CNK altimeter setting: increase LPV DA to 2174 feet; increase LNAV/VNAV DA to 2224 feet and all visibilities ¼ SM; increase all MDAs 180 feet, and Circling all visibilities ½ SM.	

AWOS-3PT 118.45	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 0
---------------------------	------------------------------------------	---------------------------------

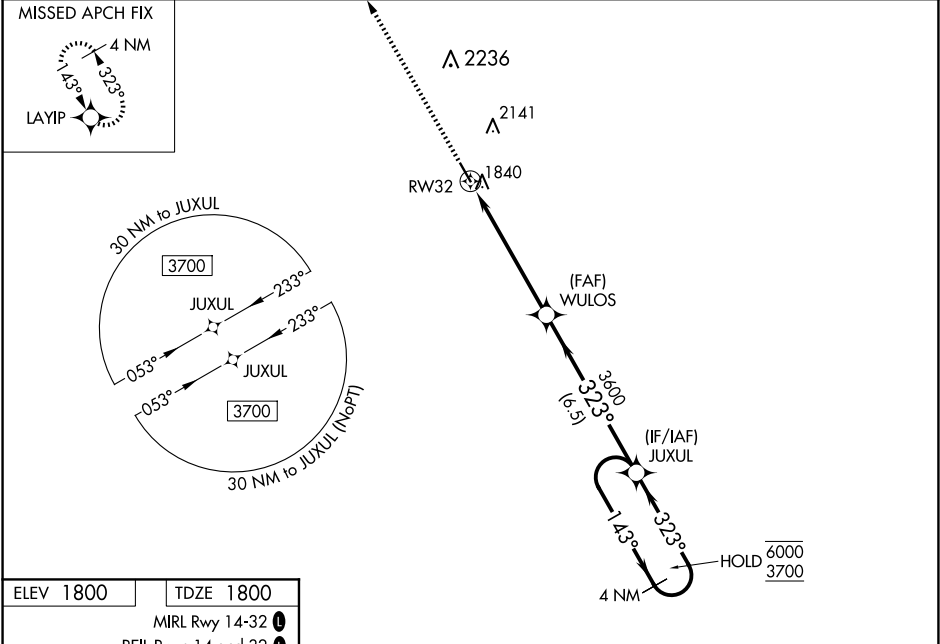

ELEV 1800	TDZE 1800
MIRL Rwy 14-32	REIL Rwy 14 and 32

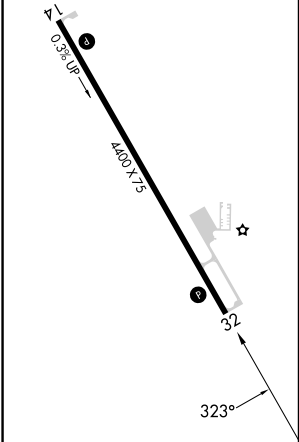

3900

↑

LAYIP

✦

JUXUL

4 NM Holding Pattern

143° → 6000

← 323° 3700

WULOS

3600

3600

323°

1.4 NM to RW32

1.4 NM

4.1 NM

6.5 NM

RW32

GP 3.00°

TCH 40

CATEGORY	A	B	C	D
LPV DA	2000-1	200 (200-1)	NA	
LNAV/VNAV DA	2050-1	250 (300-1)	NA	
LNAV MDA	2300-1	500 (500-1)	NA	
CIRCLING	2480-1 680 (700-1)	2580-1 780 (800-1)	NA	