

VORTAC INK	APP CRS	Rwy Ldg	4268
112.1	125°	TDZE	2609
Chan 58		Apt Elev	2615


VOR/DME RWY 12  
ROY HURD MEML (E01)

⚠ When local altimeter setting not received, use INK altimeter setting and increase all MDAs 80 feet and S-12 visibility Cat C ½ SM, and Circling visibility Cat C ½ SM.


⚠ Straight-in Rwy 12 NA at night, Circling Rwy 1, 12, 19 NA at night.  
Rwy 12 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing right turn to 5000 direct INK VORTAC and hold.

AWOS-3PT 118.225	FORT WORTH CENTER 133.1 298.95	UNICOM 122.8 (CTAF) 1
---------------------	-----------------------------------	--------------------------

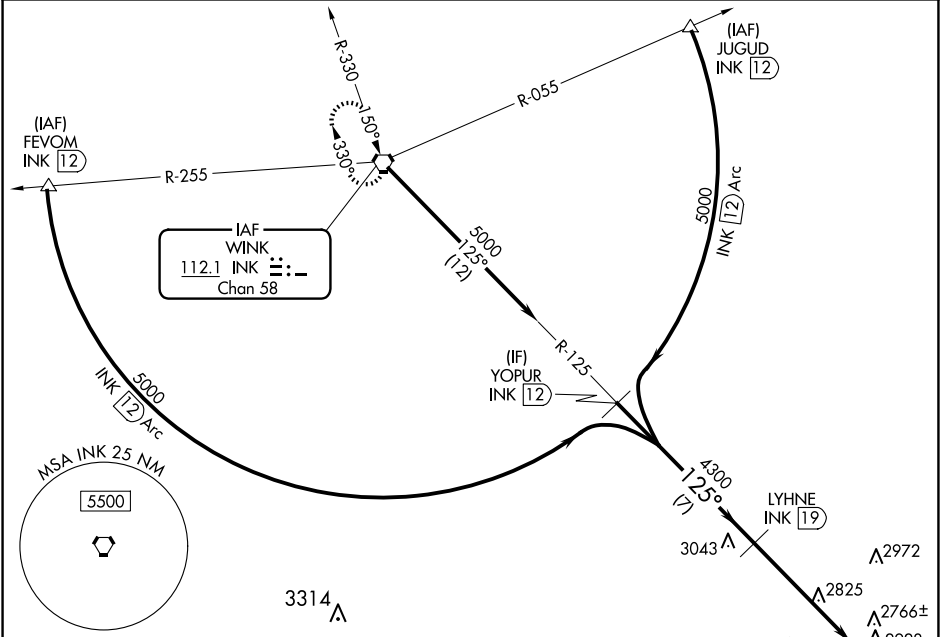

ELEV 2615	TDZE 2609
-----------	-----------

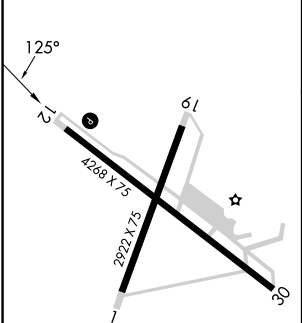

MRL Rwy 1-19 and 12-30 1
--------------------------

VGS and descent angles not coincident (VGS Angle 3.00/TCH 24).			
5000 INK			
YOPUR INK 12			
LYHNE INK 19			
Procedure Turn NA			
7 NM			
5.2 NM			
CATEGORY	A	B	C
S-12	3340-1 731 (800-1)	3340-1¼ 731 (800-1¼)	3340-2 731 (800-2)
CIRCLING	3340-1 725 (800-1)	3340-1¼ 725 (800-1¼)	3340-2 725 (800-2)