


WAAS CH 78421 W23B	APP CRS 232°	Rwy Ldg 10913 TDZE 743 Apt Elev 744
----------------------------------------	------------------------	----------------------------------------------------------------

RNAV (GPS) RWY 23R
RICKENBACKER INTL (LCK)

RNP APCH - GPS.	<p>⚠ Circling NA northwest of Rwy 5L-23R. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using John Glenn Columbus Intl altimeter setting. When local altimeter setting not received, use John Glenn Columbus Intl altimeter setting: increase LPV DA to 978 feet; increase LNAV/VNAV DA to 1041 feet and all visibilities to 1 SM; increase all MDAs 40 feet and Circling Cat D visibility ¼ SM.</p>	MISSED APPROACH: Climb to 3000 direct COLMU and on track 179° to XUB VOR and hold.
-----------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------

ATIS 132.75	COLUMBUS APP CON 134.0 279.6	RICK TOWER 120.05 348.4	GND CON 125.275 275.8	CLNC DEL 125.275 275.8
-----------------------	----------------------------------------	-----------------------------------	---------------------------------	----------------------------------

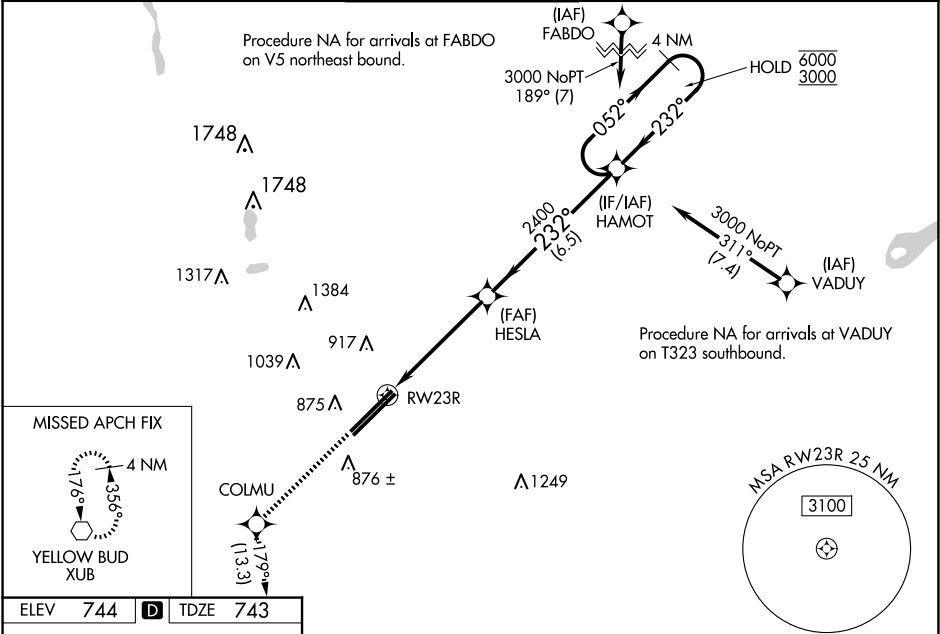

		3000	COLMU	tr 179°	XUB	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 79).	
						4 NM Holding Pattern	
						GP 3.00° TCH 55	
		CATEGORY		A	B	C	D
		LPV DA		943-¾		200 (200-¾)	
		LNAV/VNAV DA		1006-⅞		263 (300-⅞)	
		LNAV MDA		1220-1	477 (500-1)	1220-1⅓	477 (500-1⅓)
		CIRCLING		1240-1	496 (500-1)	1280-1½ 536 (600-1½)	1400-2 656 (700-2)