

APP CRS
192°

Rwy Idg **3700**
TDZE **80**
Apt Elev **80**



RNAV (GPS) RWY 19

LAKE CITY MUNI CJ EVANS FLD (51J)

⚠ Rwy 19 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA.
⚠ NA Use Kingstree altimeter setting, when not received, use Florence altimeter setting and increase all MDAs 40 feet, increase LNAV Cat B visibility ¼ SM and Cat C visibility ½ SM, increase Circling Cats B/C visibility ¼ SM. Straight-in Rwy 19 NA at night.

MISSED APPROACH:
Climb to 2000 direct YUBUD and hold.

CKI AWOS-3 124.775	FLORENCE APP CON★ 135.25 316.15	CTAF 122.9
------------------------------	---	----------------------

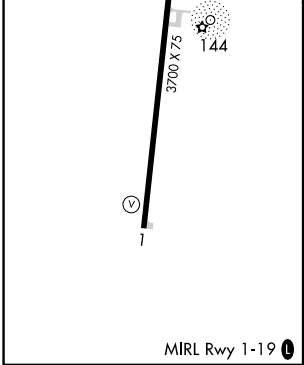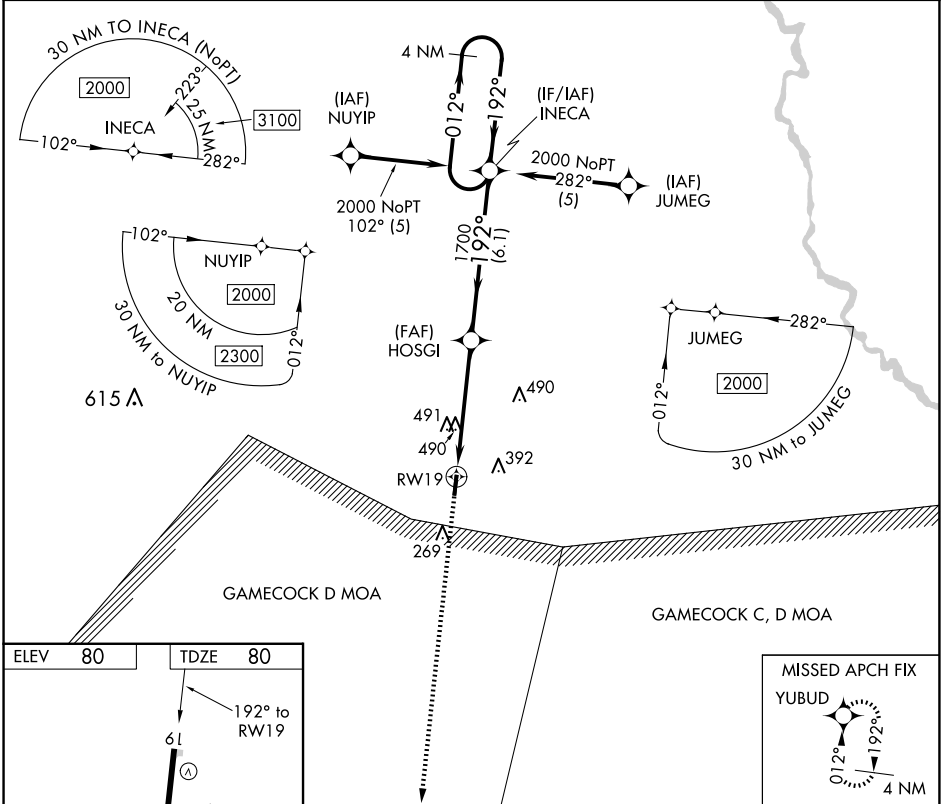

2000

YUBUD

Visual Segment - Obstacles.

INECA Holding Pattern

RW19

HOSGI

1700

4.9 NM

6.1 NM

CATEGORY	A	B	C	D
LNAV MDA	820-1	740 (800-1)	820-2 740 (800-2)	NA
CIRCLING	820-1 740 (800-1)	880-1 800 (800-1)	880-2¼ 800 (800-2¼)	NA