

WAAS CH <b>53714</b> <b>W16A</b>	APP CRS <b>159°</b>	Rwy Idg TDZE <b>2160</b> Apt Elev <b>2160</b>
--	------------------------	---

RNAV (GPS) RWY 16

PIONEER VILLAGE FLD (ØV3)


⚠

NA


Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Kearney altimeter setting; when not received, use Holdrege altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV all Cats visibility ¼ mile. Circling NA to Rwy 5/23.

MISSED APPROACH: Climb to 3700 direct MEDOC and hold.

EAR AWOS-3PT <b>123.875</b>	MINNEAPOLIS CENTER <b>119.4 278.8</b>	UNICOM <b>122.7 (CTAF) 0</b>
--------------------------------	--	---------------------------------

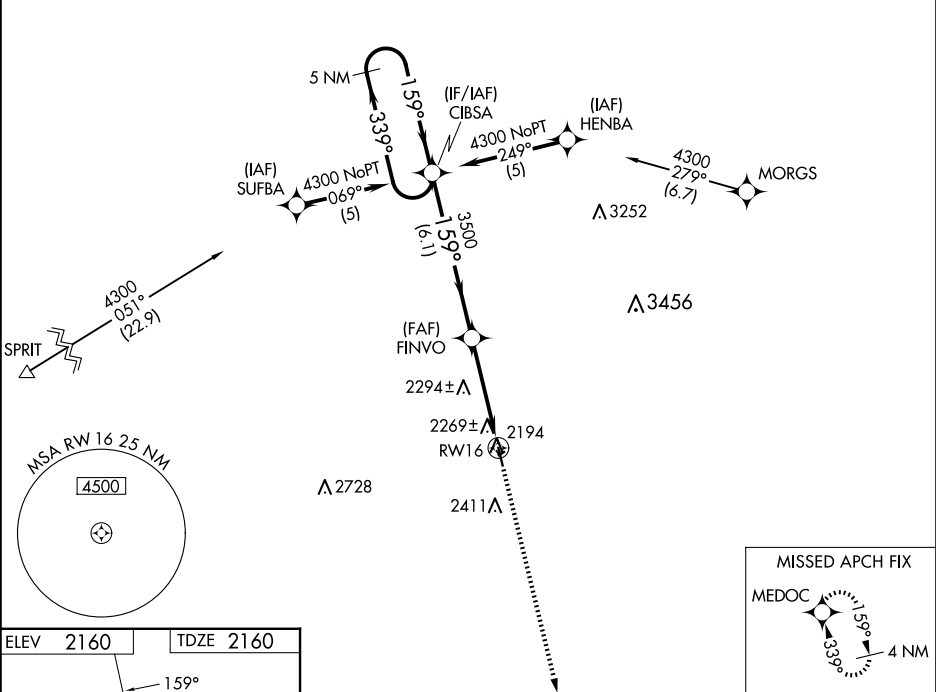

ELEV <b>2160</b>	TDZE <b>2160</b>
------------------	------------------

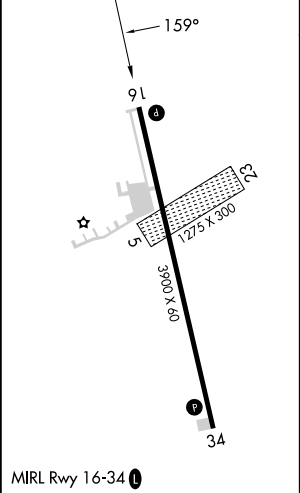

5 NM Holding Pattern				3700	MEDOC
4300 ← 339° 159° →				↑	✦
GP 3.00° TCH 40				FINVO	RW16
				3500	
				6.1 NM	4.1 NM
CATEGORY	A	B	C	D	
LPV DA	2445-1	285 (300-1)	NA		
LNAV/VNAV DA	2574-1½	414 (500-1½)	NA		
LNAV MDA	2580-1	420 (500-1)	NA		
CIRCLING	2680-1 520 (600-1)	2780-1 620 (700-1)	NA		