WAAS CH **42833** **W20A** | APP CRS **201°** | Rwy Idg **6307** TDZE **4970** Apt Elev **4970**

RNAV (GPS) RWY 20

CLAYTON MUNI AIRPARK (CAO)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Circling NA west of Rwy 2-20. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Dalhart altimeter setting and increase all DA 227 feet and all MDA 240 feet, increase LPV all Cats visibility ⅞ mile, increase LNAV/VNAV all Cats visibility ¾ mile, increase LNAV Cat C visibility ⅝ mile, and increase circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Dalhart altimeter setting.

MISSED APPROACH: Climb to 8000 direct CACAV and hold, continue climb-in-hold to 8000.

ASOS	ALBUQUERQUE CENTER	UNICOM
120.625	**127.85 285.475**	**122.8** (CTAF) L

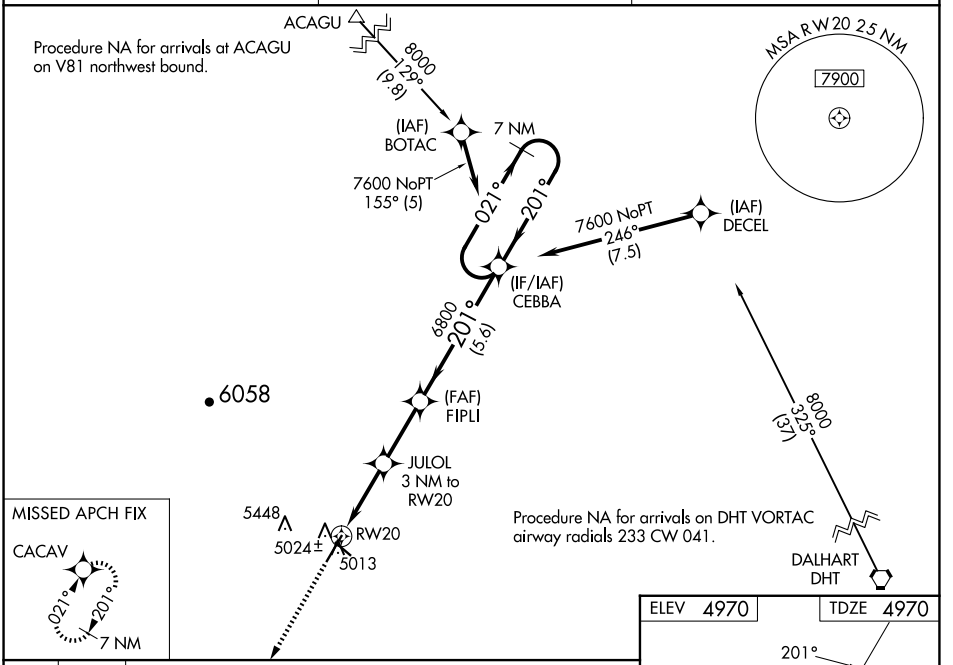

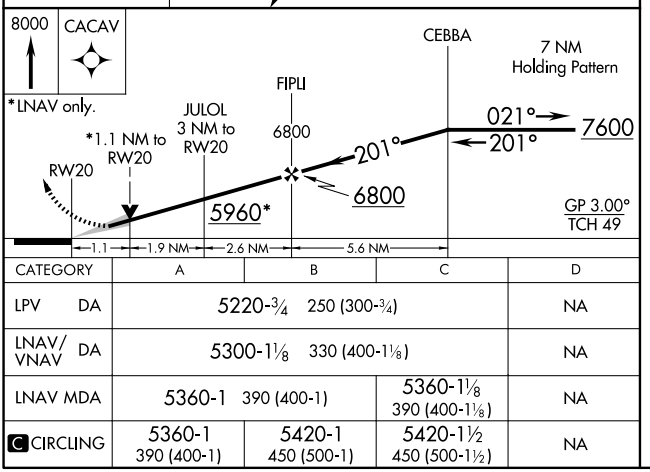

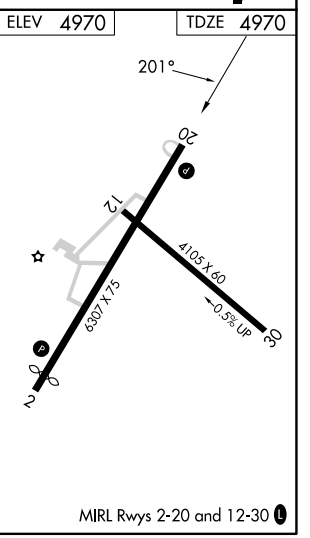

CATEGORY	A	B	C	D
LPV DA	5220-¾ 250 (300-¾)			NA
LNAV/VNAV DA	5300-1⅛ 330 (400-1⅛)			NA
LNAV MDA	5360-1 390 (400-1)		5360-1⅛ 390 (400-1⅛)	NA
C CIRCLING	5360-1 390 (400-1)	5420-1 450 (500-1)	5420-1½ 450 (500-1½)	NA

MIRL Rwys 2-20 and 12-30 L

SW-1, 07 AUG 2025 to 04 SEP 2025
SW-1, 07 AUG 2025 to 04 SEP 2025