

RNP APCH - GPS.

DME or RADAR required.

▼

▲

For inop ALS, increase S-LOC 30 Cats C, D visibility to 1 SM.



MALSRR

AS

⋮

MISSED APPROACH: Climb to 1500 then climbing left turn to 2600 direct SINFO and hold.

| | | |
|-------------------|----------------------------------|--------------------------|
| AWOS-3 133,975 | ATLANTA APP CON ★ 124.2 279.6 | UNICOM 122.8 (CTAF) ① |
|-------------------|----------------------------------|--------------------------|

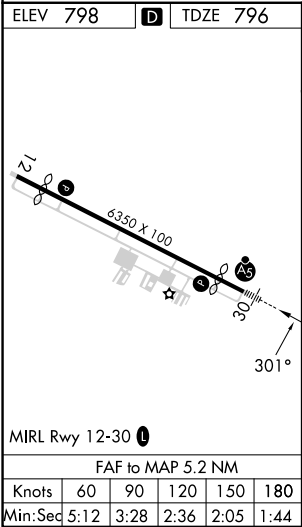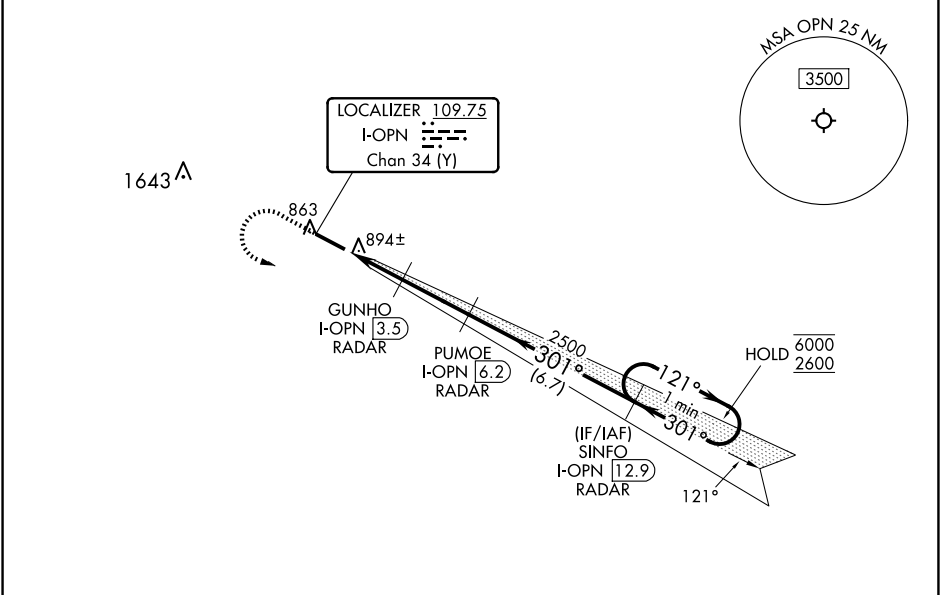

| | | | | | | | | |
|----------|--------------------|-----------------------|---|--------------------|------|------|----------------------------|-----------------|
| 1500 | 2600 | SINFO I-OPN 12.9 | VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 27). | | | | One Minute Holding Pattern | |
| 121° | 301° | PUMOE I-OPN 6.2 RADAR | 2500 | 121° | 301° | 6000 | 2600 | GS 3.00° TCH 50 |
| 121° | 301° | GUNHO I-OPN 3.5 RADAR | 1640 | 121° | 301° | 2500 | 2500 | |
| I-OPN 1 | I-OPN 2.1 | | | | | | | |
| 1.1 NM | 1.4 NM | 2.7 NM | 6.7 NM | | | | | |
| CATEGORY | A | B | C | D | | | | |
| S-ILS 30 | 1016-1/2 | 220 (300-1/2) | | | | | | |
| S-LOC 30 | 1160-1/2 | 364 (400-1/2) | 1160-5/8 | 364 (400-5/8) | | | | |
| CIRCLING | 1240-1 442 (500-1) | 1260-1 462 (500-1) | 1260-1 1/2 462 (500-1 1/2) | 1680-3 882 (900-3) | | | | |

SE-4, 07 AUG 2025 to 04 SEP 2025

SE-4, 07 AUG 2025 to 04 SEP 2025