

WAAS
CH **99301**
W35A

APP CRS
351°

Rwy Idg
TDZE **2962**
Apt Elev **2969**

RNAV (GPS) RWY 35

SCOTT CITY MUNI (TQK)

RNP APCH.

▼

▲


Circling NA to Rws 8 and 26.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA
below -20°C or above 54°C.

MISSED APPROACH: Climb to
5000 direct GAGSY and hold.

AWOS-3P
120.0

DENVER CENTER
132.7 226.675

UNICOM
122.8 (CTAF) 0

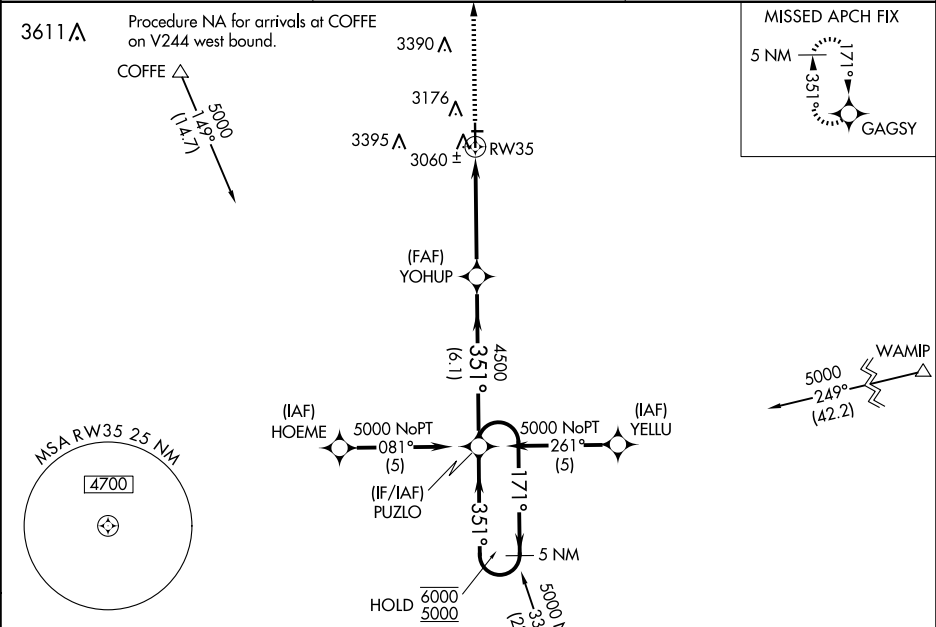

ELEV **2969** TDZE **2962**

REIL Rws 17 and 35
MIRL Rwy 17-35

Z1
2145 X 60
0.4% UP
20
75
5002 X 2002
35
351° to RW35

5000 GAGSY

*LNAV only

*1.3 NM to RW35

YOHUP 4500

5 NM Holding Pattern

171° → 6000
← 351° 5000

GP 3.00°
TCH 40

CATEGORY	A	B	C	D
LPV DA	3212-1 250 (300-1)			
LNAV/VNAV DA	3361-1½ 399 (400-1½)			
LNAV MDA	3400-1	438 (500-1)	3400-1¼ 438 (500-1¼)	3400-1½ 438 (500-1½)
CIRCLING	3480-1 511 (600-1)	3620-1 651 (700-1)	3700-2 731 (800-2)	3700-2¼ 731 (800-2¼)