

WAAS CH 45926 W03A	APP CRS 027°	Rwy Ldg TDZE 530 Apt Elev 537
--	------------------------	---

RNAV (GPS) RWY 3



OHIO COUNTY (JQD)

RNP APCH - GPS.

⚠ Baro-VNAV and VDP NA when using Owensboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Owensboro altimeter setting and increase LPV and LNAV/VNAV DA to 851 feet. Increase all MDA 80 feet and LNAV Cat C visibility $\frac{3}{8}$ SM and Circling Cat C visibility $\frac{1}{4}$ SM. Circling Rwy 21 NA at night. Rwy 3 helicopter visibility reduction below $\frac{3}{8}$ SM NA.

MISSED APPROACH:
Climb to 2500 direct ZUTJO and hold.

AWOS-3PT 132.1	EVANSVILLE APP CON ★ 124.025 290.9	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

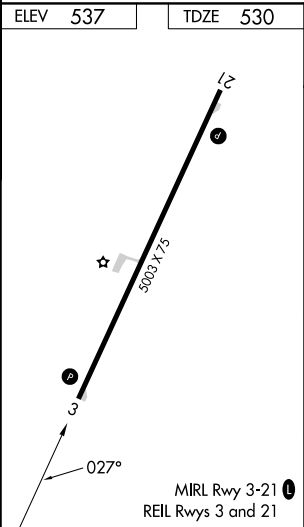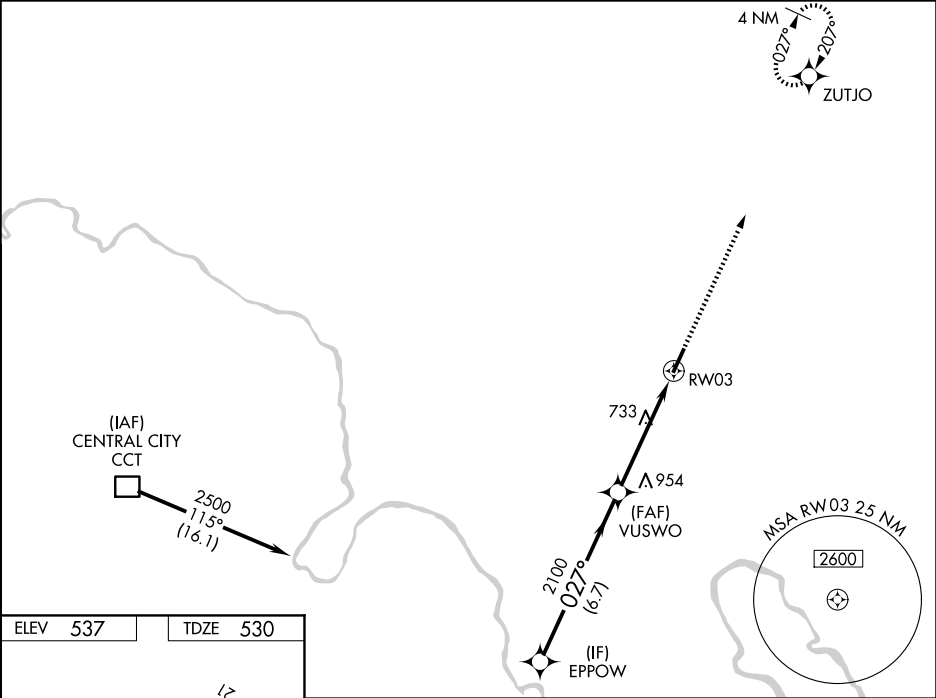

EPPOW		VUSWO		2500	ZUTJO
2500		2100		1.5 NM to RW03	RW03
GP 3.00° TCH 40		2100		1.5 NM to RW03	RW03
6.7 NM		3.3 NM		1.5 NM	
CATEGORY	A	B	C	D	
LPV DA	780-1	250 (300-1)		NA	
LNAV/VNAV DA	780-1	250 (300-1)		NA	
LNAV MDA	1040-1	510 (600-1)	1040-1 $\frac{3}{8}$ 510 (600-1 $\frac{3}{8}$)	NA	
CIRCLING	1040-1 503 (600-1)	1100-1 563 (600-1)	1300-2 $\frac{1}{4}$ 763 (800-2 $\frac{1}{4}$)	NA	

SE-1, 07 AUG 2025 to 04 SEP 2025

SE-1, 07 AUG 2025 to 04 SEP 2025