


ANCHORAGE DEP CON  
118.6 290.5  
CTAF  
123.6

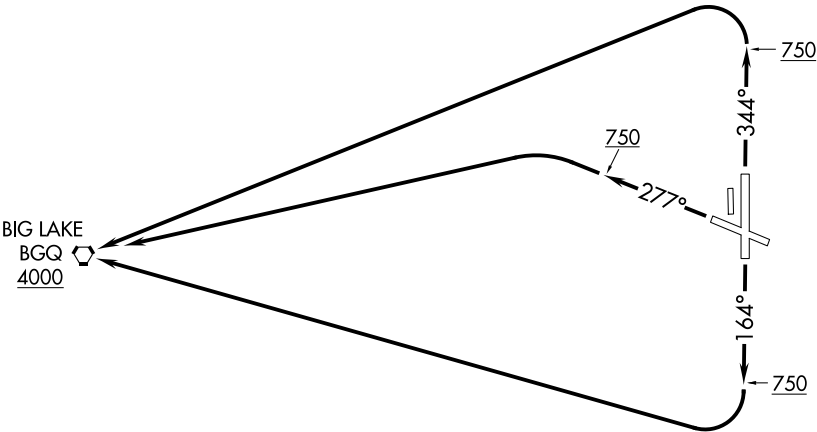

NOTE: RNAV 1.  
NOTE: GPS required.  
NOTE: Rwy 16: Do not exceed 210K until established direct BGQ VORTAC.

TAKEOFF MINIMUMS

- Rwy 10: NA-obstacles.
- Rwy 16: Standard with minimum climb of 319' per NM to 1100.
- Rwy 28: 300-1⅞ , or standard with minimum climb of 209' per NM to 750.
- Rwy 34: Standard with minimum climb of 432' per NM to 900.

(NOTES CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 16: Climb heading 164° to 750, then right turn direct to cross BGQ VORTAC at or above 4000, thence. . . .

TAKEOFF RUNWAY 28: Climb heading 277° to 750, then left turn direct to cross BGQ VORTAC at or above 4000, thence. . . .

TAKEOFF RUNWAY 34: Climb heading 344° to 750, then left turn direct to cross BGQ VORTAC at or above 4000, thence. . . .

. . . .maintain 4000 or assigned altitude, expect filed altitude 10 minutes after departure.