

WAAS CH 86640 W14A	APP CRS 144°	Rwy Idg TDZE Apt Elev	5000 18 18
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 14



PLATINUM (PTU)(PAPM)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Togiak altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Togiak altimeter setting: increase LPV DA to 371 feet; increase LNAV/VNAV DA to 424 feet and all Cats visibilities ¾ SM; increase all MDA 120 feet and increase LNAV and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 420 then Climbing right turn to 2500 direct FELTI and hold.

AWOS-3P 118.375	ANCHORAGE CENTER 124.2 251.1	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

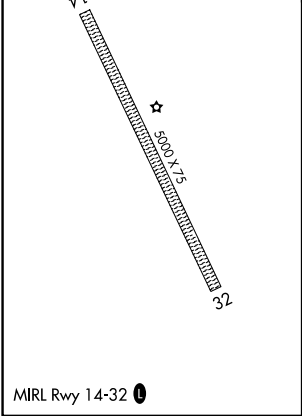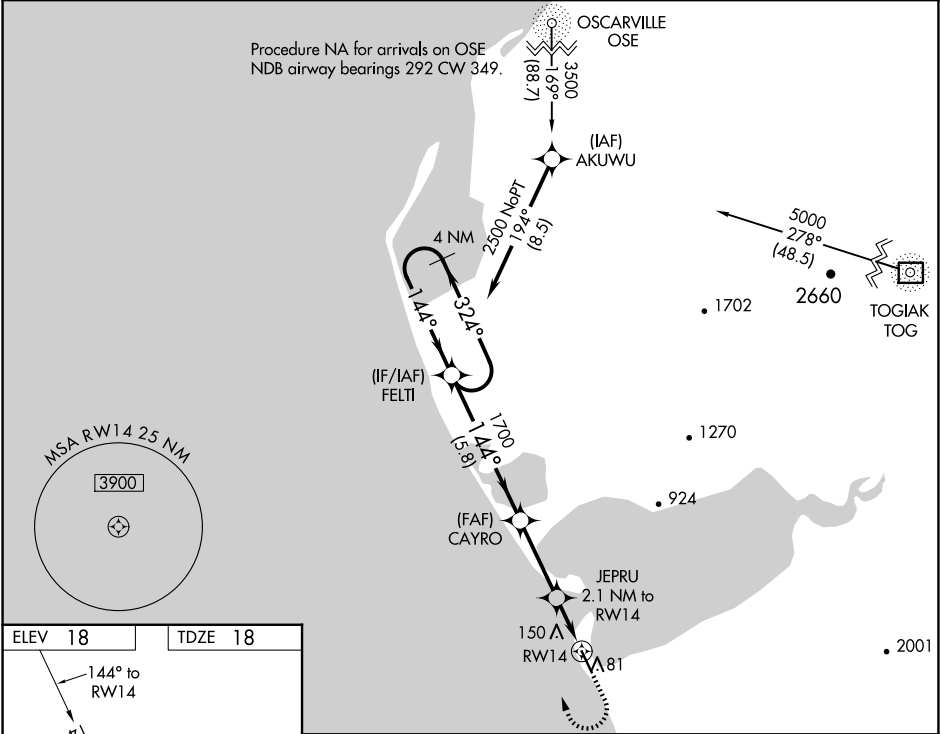

<div>4 NM Holding Pattern</div> <div>FELTI</div> <div>CAYRO</div> <div>JEPRU 2.1 NM to RW14</div> <div>420</div> <div>2500</div> <div>FELTI</div>					
<div>2500 ← 324°</div> <div>144° →</div> <div>144°</div> <div>1700</div> <div>*720</div> <div>*1.1 NM to RW14</div> <div>*LNAV only</div> <div>GP 3.00° TCH 40</div>					
<div>5.8 NM</div> <div>3.1 NM</div> <div>1 NM</div> <div>1.1 NM</div> <div>RW14</div>					
CATEGORY	A		B	C	D
LPV DA	268-1 250 (300-1)				NA
LNAV/VNAV DA	321-1 303 (400-1)				NA
LNAV MDA	400-1 382 (400-1)		400-1½ 382 (400-1½)		NA
<div>CIRCLING</div>	460-1 442 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½)		NA