


WAAS CH <b>61338</b> <b>W12A</b>	APP CRS <b>125°</b>	Rwy Idg TDZE Apt Elev	<b>4200</b> <b>2756</b> <b>2756</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12

BEACH (20U)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.		MISSED APPROACH: Climb to 5000 direct EKOYU and hold.
AWOS-3 <b>118.175</b>	SALT LAKE CENTER <b>126.85 305.2</b>	UNICOM <b>122.8</b> (CTAF) <b>0</b>

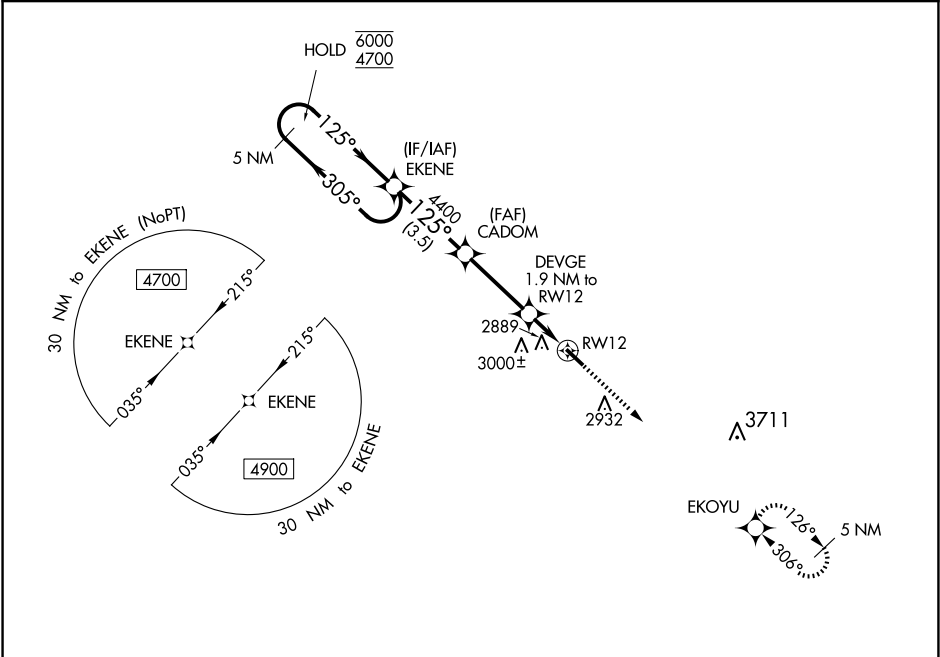

5 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).		ELEV 2756	TDZE 2756
				5000	EKOYU
CATEGORY		A	B	C	D
LPV	DA	3006-1	250 (300-1)	NA	
LNAV/VNAV	DA	3051-1	295 (300-1)	NA	
LNAV	MDA	3140-1	384 (400-1)	NA	
CIRCLING		3280-1 524 (600-1)	3360-1 604 (700-1)	NA	