

WAAS
CH **40437**
W31A

APP CRS
310°

Rwy Ldg
TDZE
Apt Elev

3701
1854
1854

RNAV (GPS) RWY 31

HIGHMORE MUNI (9DØ)


RNP APCH - GPS.

▼
NA

Baro-VNAV NA. Use 98D altimeter setting; when not received, use PIR altimeter setting and increase LPV DA to 2239 feet and all visibilities 1/8 SM. Increase LNAV/VNAV DA to 2553 feet and all visibilities 1/8 SM. Increase all MDAs 40 feet.

MISSED APPROACH: Climb to 4000 direct OMCEW and hold.

| | | |
|----------------------------|--|----------------------|
| 98D AWOS-2 122.9 | MINNEAPOLIS CENTER 125.1 269.1 | CTAF 122.9 |
|----------------------------|--|----------------------|

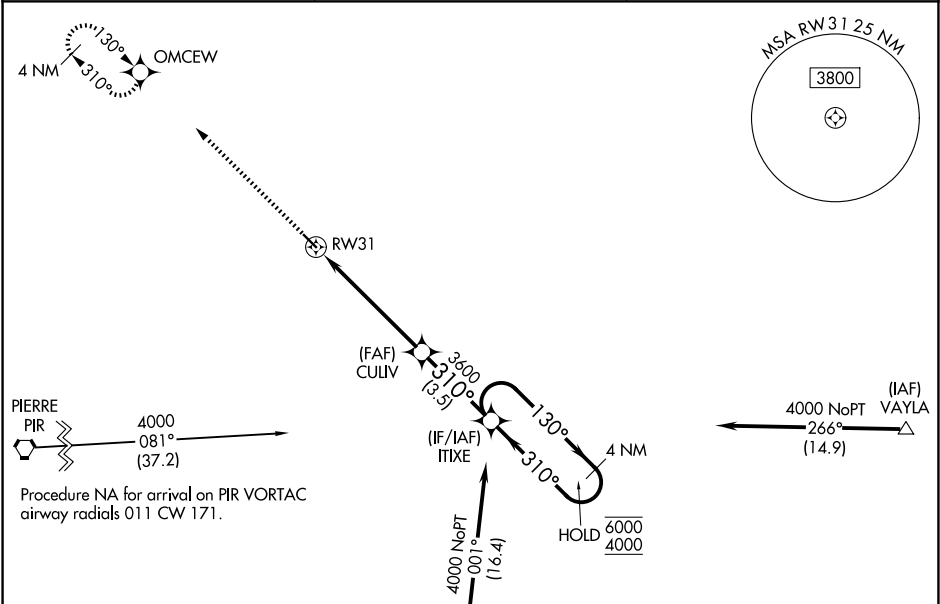

ELEV 1854

TDZE 1854

4000

OMCEW

RW31

310°

CULIV

3600

ITXE

4 NM Holding Pattern

130° → 6000

← 310° 4000

GP 3.00°

TCH 40

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|---|----|
| LPV DA | 2205-1 | 351 (400-1) | | NA |
| LNAV/VNAV DA | 2519-1 1/8 | 665 (700-1 1/8) | | NA |
| LNAV MDA | 2540-1 | 686 (700-1) | | NA |
| CIRCLING | 2540-1 686 (700-1) | 2600-1 746 (800-1) | | NA |

MIRL Rwy 13-31

0.4° UP

3701 X 60

310°