RNAV (GPS) RWY 7

BLOYER FLD (Y72)

WAAS	APP CRS	Rwy Ldg	3900
CH 97737	068°	TDZE	966
W07A		Apt Elev	966

RNP APCH - GPS.

T Obtain local altimeter setting on CTAF, when not received, use CMY altimeter setting and increase all MDAs 20 feet, increase LNAV visibility Cat C 1⅛ SM.

NA Rwy 7 helicopter visibility reduction below 1 SM NA. Procedure NA at night.

MISSED APPROACH: Climb to 3000 direct GLAKE and hold.

VOLK APP CON ★	VOLK CTAF	CTAF
135.25 244.875	127.5	122.9 L

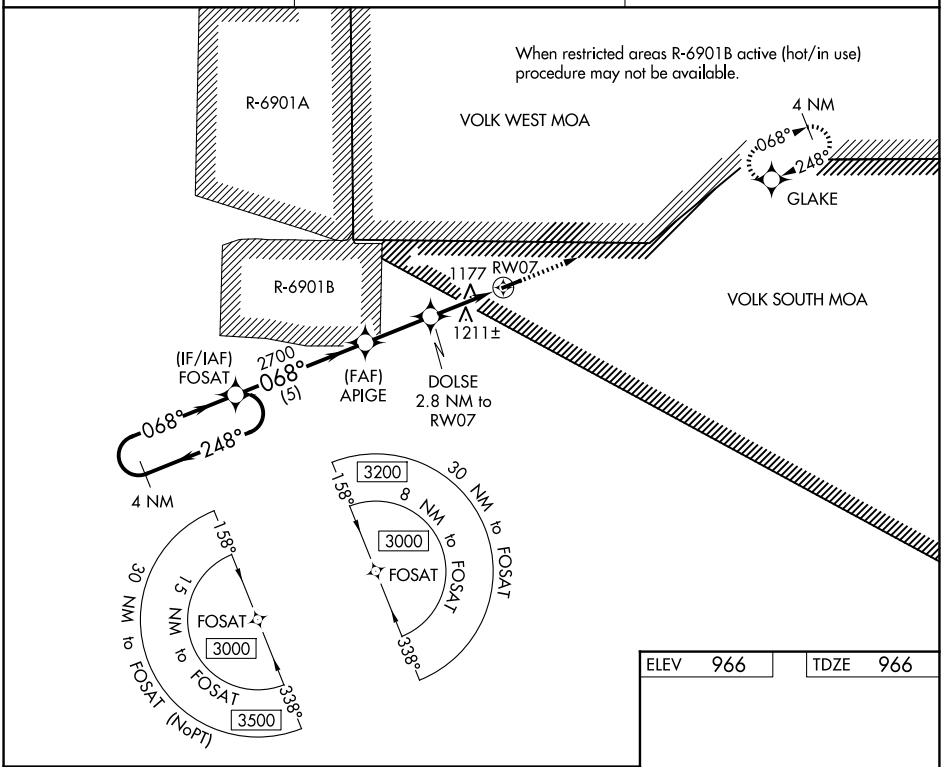

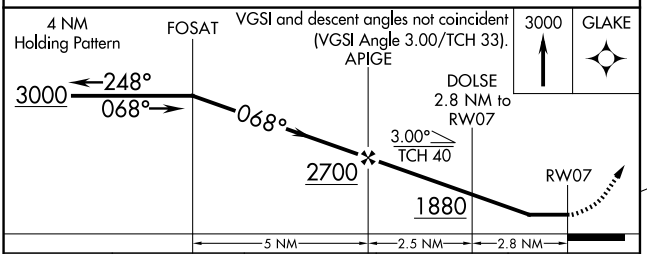

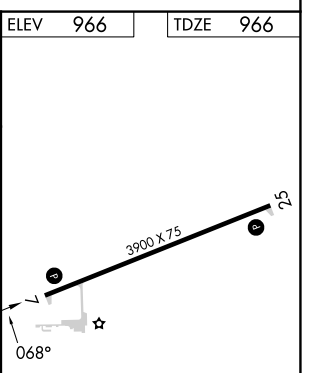

CATEGORY	A	B	C	D
LP MDA	1460-1 494 (500-1)		1460-1⅜ 494 (500-1⅜)	NA
LNAV MDA	1500-1 534 (600-1)		1500-1½ 534 (600-1½)	NA
CIRCLING	1540-1 574 (600-1)	1560-1 594 (600-1)	1660-2 694 (700-2)	NA

MIRL Rwy 7-25 L

REIL Rwys 7 and 25 L

EC-3, 07 AUG 2025 to 04 SEP 2025
EC-3, 07 AUG 2025 to 04 SEP 2025