| WAAS | APP CRS | Rwy Ldg | 4364 |
|---|---|---|---|
| CH 58047 | 151° | TDZE | 2030 |
| W15A | | Apt Elev | 2034 |

# RNAV (GPS) RWY 15

ASHLEY MUNI (ASY)

RNP APCH - GPS.

Baro-VNAV NA. Rwy 15 helicopter visibility reduction below ¾ SM NA. Use 7L2 altimeter setting; when not received, use MBG altimeter setting and increase LPV DA to 2448 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 2477 feet and all visibilities ¼ SM. Increase all MDAs 40 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 4000 direct PESSO and hold.

| 7L2 AWOS-3 | MINNEAPOLIS CENTER | CTAF |
|---|---|---|
| 118.175 | 135.25 256.7 | 122.9 L |

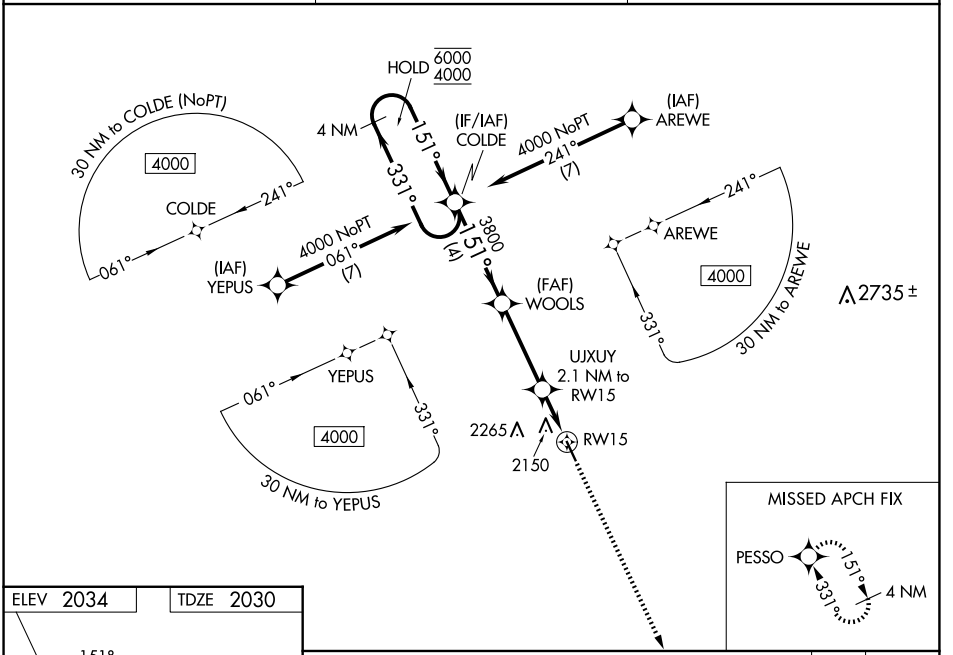


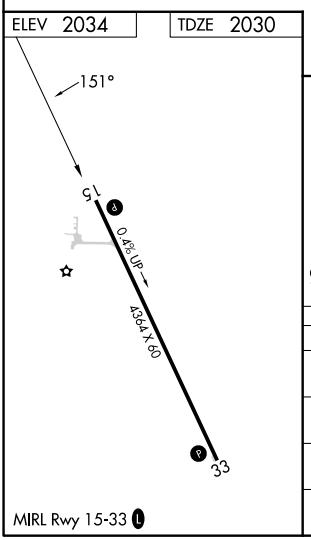


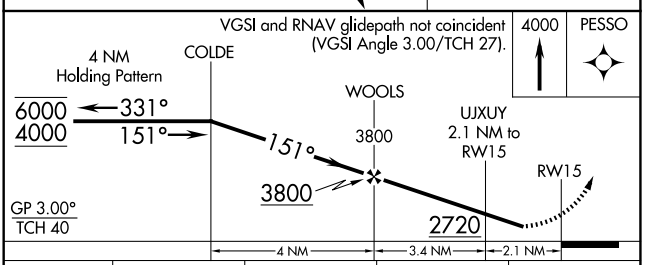


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 2408-1 378 (400-1) | | | |
| LNAV/VNAV DA | 2437-1⅛ 407 (500-1⅛) | | | |
| LNAV MDA | 2540-1 510 (600-1) | | 2540-1⅜ 510 (600-1⅜) | |
| CIRCLING | 2600-1 566 (600-1) | 2700-1 666 (700-1) | 2700-1¾ 666 (700-1¾) | 2800-2½ 766 (800-2½) |



NC-1, 07 AUG 2025 to 04 SEP 2025
NC-1, 07 AUG 2025 to 04 SEP 2025