

ROSWELL, NEW MEXICO

AL-354 (FAA)

24249



|  |                        |  |
|--|------------------------|--|
| WAAS<br>CH <b>65702</b><br><b>W17A</b> | APP CRS<br><b>170°</b> | Rwy Idg <b>10008</b><br>TDZE <b>3666</b><br>Apt Elev <b>3671</b> |
|--|------------------------|--|

# RNAV (GPS) RWY 17

ROSWELL AIR CENTER (ROW)

|  |   |
|--|---|
| RNP APCH - GPS.  | MISSED APPROACH: Climb to 6000 direct KIGDE and hold. |
| <p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use Artesia altimeter setting: increase LPV DA to 4083 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4083 feet; increase all MDAs 80 feet and visibility LNAV Cat C ¼ SM and Circling Cat D ¼ SM. VDP and Baro-VNAV NA when using Artesia altimeter setting.</p> |   |

|                             |  |   |                               |                                   |                         |
|-----------------------------|--|---|-------------------------------|-----------------------------------|-------------------------|
| ATIS<br><b>128.45 306.2</b> | ROSWELL APP CON*<br><b>119.6 239.0</b> | ROSWELL TOWER*<br><b>118.5 (CTAF) 0 233.7</b> | GND CON<br><b>121.9 348.6</b> | CLNC DEL<br><b>132.875 282.25</b> | UNICOM<br><b>122.95</b> |
|-----------------------------|--|---|-------------------------------|-----------------------------------|-------------------------|

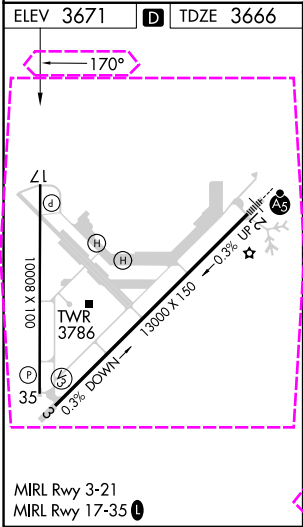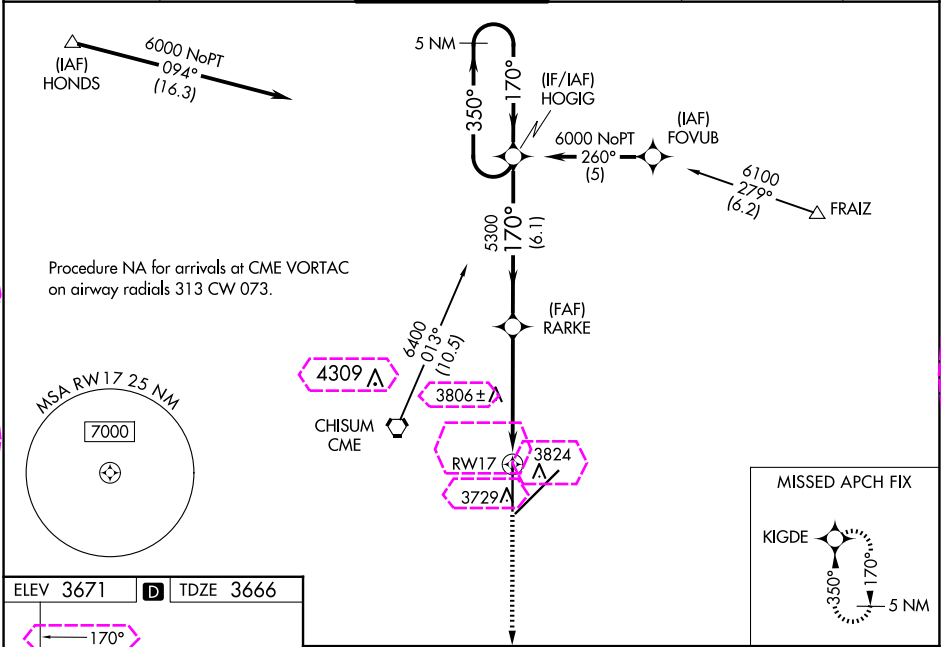

|              |  |                            |  |                            |  |                            |  |                      |  |
|--------------|--|----------------------------|--|----------------------------|--|----------------------------|--|----------------------|--|
| 6000         |  | KIGDE                      |  |                            |  |                            |  |                      |  |
|              |  |                            |  |                            |  |                            |  |                      |  |
|              |  | RW17                       |  | RARKE                      |  | HOGIG                      |  | 5 NM Holding Pattern |  |
|              |  | 1.3 NM to RW17             |  |                            |  | 350°                       |  | 6000                 |  |
|              |  | 1.3 NM                     |  | 3.6 NM                     |  | 170°                       |  | 170°                 |  |
|              |  |                            |  |                            |  | 5300                       |  | GP 3.00° TCH 50      |  |
| CATEGORY     |  | A                          |  | B                          |  | C                          |  | D                    |  |
| LPV DA       |  | 3916-3/4                   |  | 250 (300-3/4)              |  |                            |  |                      |  |
| LNAV/VNAV DA |  | 4003-1 1/4                 |  | 337 (400-1 1/4)            |  |                            |  |                      |  |
| LNAV MDA     |  | 4120-1 454 (500-1)         |  | 4120-1 1/4 454 (500-1 1/4) |  | 4120-1 1/2 454 (500-1 1/2) |  |                      |  |
| CIRCLING     |  | 4140-1 1/4 469 (500-1 1/4) |  | 4140-1 1/2 469 (500-1 1/2) |  | 4300-2 629 (700-2)         |  |                      |  |

ROSWELL, NEW MEXICO  
Orig-B 06OCT22

33°18'N-104°32'W

# RNAV (GPS) RWY 17

ROSWELL, NEW MEXICO

AL-354 (FAA)

25219




|  |                        |  |
|--|------------------------|--|
| WAAS<br>CH <b>65702</b><br><b>W17A</b> | APP CRS<br><b>170°</b> | Rwy Ldg <b>10008</b><br>TDZE <b>3666</b><br>Apt Elev <b>3671</b> |
|--|------------------------|--|

# RNAV (GPS) RWY 17

ROSWELL AIR CENTER (ROW)

|  |  |
|--|--|
| RNP APCH - GPS.  | <p>MISSED APPROACH: Climb to 6000 direct KIGDE and hold.</p> |
| <p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use Artesia altimeter setting: increase LPV DA to 3996 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4083 feet; increase all MDAs 80 feet and visibility LNAV Cat C ¼ SM and Circling Cat D ¼ SM. VDP and Baro-VNAV NA when using Artesia altimeter setting.</p> |  |

|                             |  |   |                               |                                   |                         |
|-----------------------------|--|---|-------------------------------|-----------------------------------|-------------------------|
| ATIS<br><b>128.45 306.2</b> | ROSWELL APP CON*<br><b>119.6 239.0</b> | ROSWELL TOWER*<br><b>118.5 (CTAF) 233.7</b> | GND CON<br><b>121.9 348.6</b> | CLNC DEL<br><b>132.875 282.25</b> | UNICOM<br><b>122.95</b> |
|-----------------------------|--|---|-------------------------------|-----------------------------------|-------------------------|

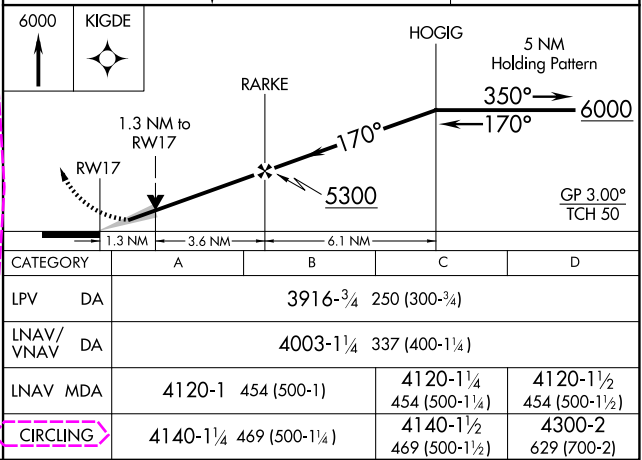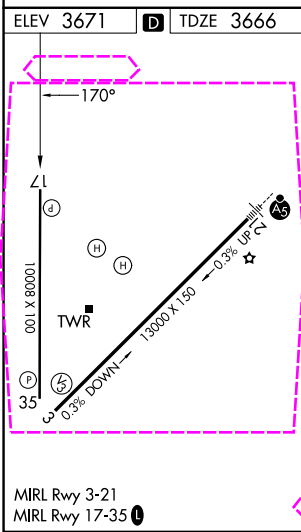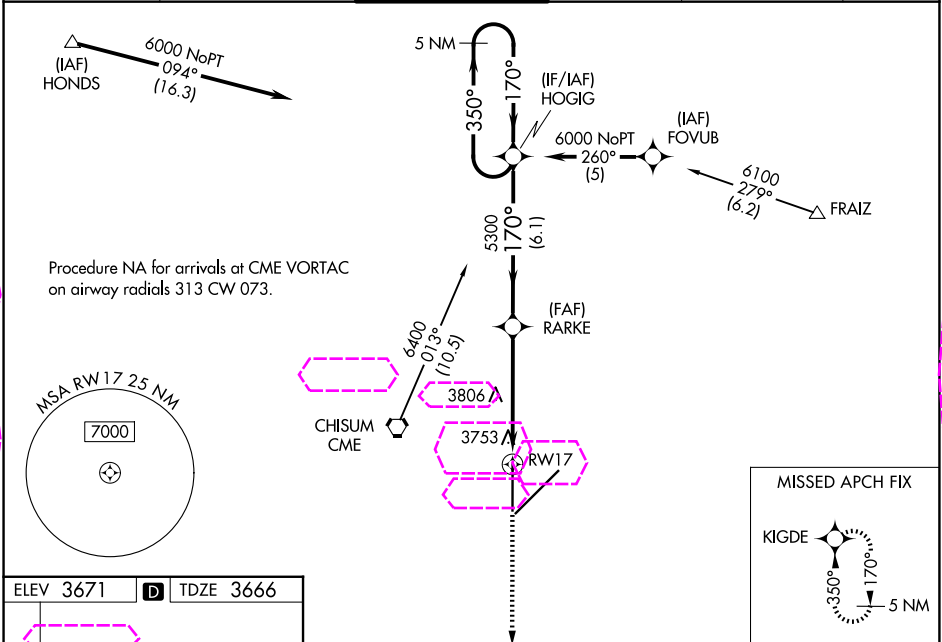

ROSWELL, NEW MEXICO  
Orig-B 06OCT22

33°18'N-104°32'W

# RNAV (GPS) RWY 17

SW-1, 07 AUG 2025 to 04 SEP 2025

SW-1, 07 AUG 2025 to 04 SEP 2025