

ROSWELL, NEW MEXICO

AL-354 (FAA)

24249

WAAS CH 70402 W35A	APP CRS 350°	Rwy Idg 10008 TDZE 3671 Apt Elev 3671
--	------------------------	--

RNAV (GPS) RWY 35

ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.

▼


▲

ASR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use Artesia altimeter setting: increase LPV DA to 4001 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4033 feet; increase all MDAs 80 feet and visibility LNAV Cat C ¼ SM, and Circling Cat D ¼ SM. Baro-VNAV and VDP NA when using Artesia altimeter setting.



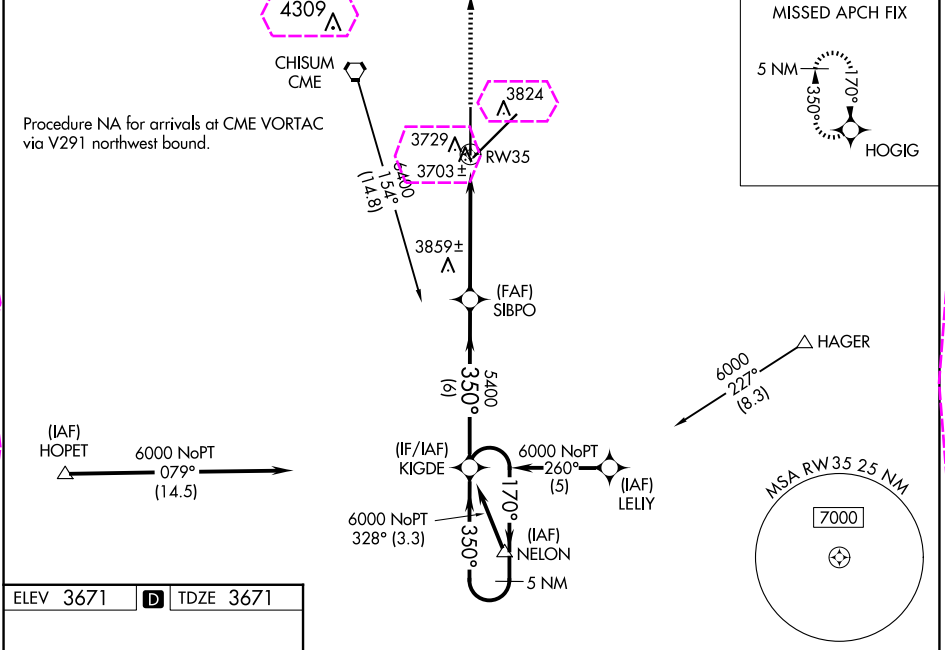

MISSED APPROACH: Climb to 6000 direct HOGIG and hold.

ATIS 128.45 306.2	ROSWELL APP CON ★ 119.6 239.0	ROSWELL TOWER ★ 118.5 (CTAF) 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-----------------------------------	-------------------------

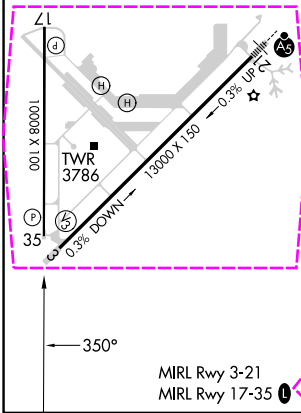

ELEV 3671	D	TDZE 3671
-----------	---	-----------



6000	HOGIG	KIGDE	5 NM Holding Pattern	
		SIBPO	170° ← 350°	
	1.3 NM to RW35	350°	6000	
	3.9 NM	5400	GP 3.00° TCH 50	
1.3 NM	6 NM			
CATEGORY	A	B	C	D
LPV DA	3921-3¼ 250 (300-¾)			
LNAV/VNAV DA	3953-1 282 (300-1)			
LNAV MDA	4120-1	449 (500-1)	4120-1¼ 449 (500-1¼)	4120-1½ 449 (500-1½)
CIRCLING	4140-1	469 (500-1)	4140-1½ 469 (500-1½)	4300-2 629 (700-2)

SW-1, 10 JUL 2025 to 07 AUG 2025

SW-1, 10 JUL 2025 to 07 AUG 2025

ROSWELL, NEW MEXICO

AL-354 (FAA)

25219




WAAS CH 70402 W35A	APP CRS 350°	Rwy Ldg TDZE 3671 Apt Elev 3671
--	------------------------	---

RNAV (GPS) RWY 35

ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.	
<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use Artesia altimeter setting: increase LPV DA to 4001 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4033 feet; increase all MDAs 80 feet and visibility LNAV Cat C ¼ SM, and Circling Cat D ¼ SM. Baro-VNAV and VDP NA when using Artesia altimeter setting.</p>	MISSED APPROACH: Climb to 6000 direct HOGIG and hold.

ATIS 128.45 306.2	ROSWELL APP CON ★ 119.6 239.0	ROSWELL TOWER ★ 118.5 (CTAF) 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-----------------------------------	-------------------------

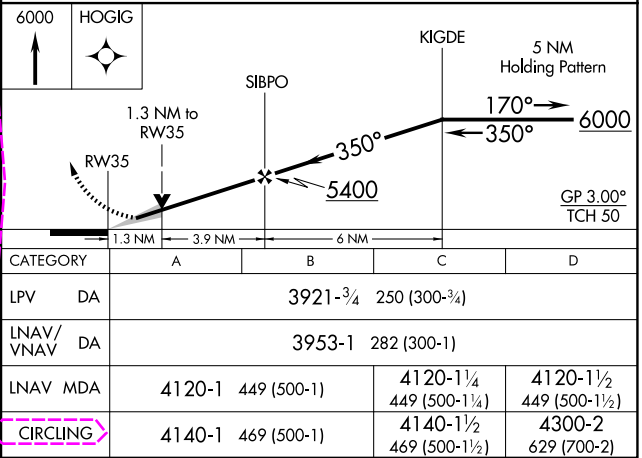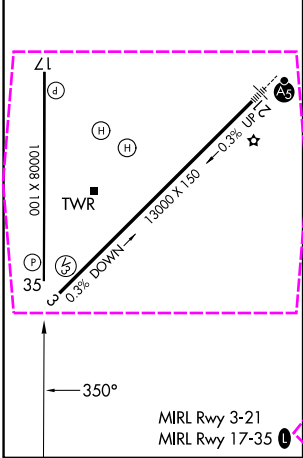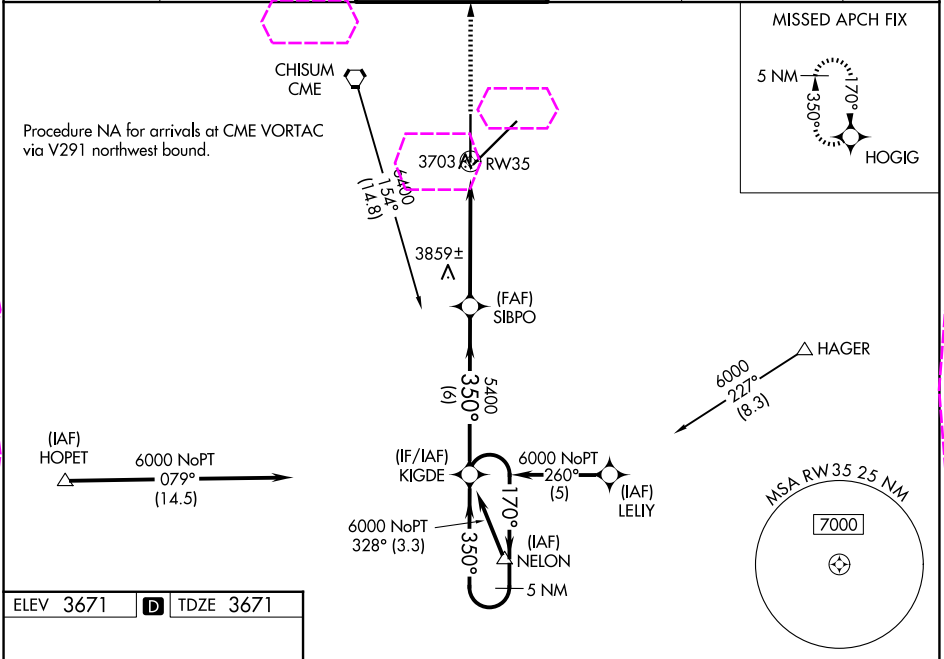

ROSWELL, NEW MEXICO
Orig-B 06OCT22

33°18'N-104°32'W

RNAV (GPS) RWY 35