

LAFAYETTE, LOUISIANA

AL-865 (FAA)

24193

|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>45903</b><br><b>W04A</b> | APP CRS<br><b>036°</b> | Rwy Idg <b>3000</b><br>TDZE <b>40</b><br>Apt Elev <b>42</b> |
|--|------------------------|---|

# RNAV (GPS) RWY 4R

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)

RNP APCH.


▼

▲


Rwy 4R helicopter visibility reduction below  $\frac{3}{4}$  SM NA.  
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C.

MISSED APPROACH: Climb to 2000 direct BEDDY and hold.

|                       |   |  |                         |                           |                         |
|-----------------------|---|--|-------------------------|---------------------------|-------------------------|
| ATIS<br><b>134.05</b> | LAFAYETTE APP CON ★<br><b>121.1 363.0</b> | LAFAYETTE TOWER ★<br><b>118.5 (CTAF) 257.8</b> | GND CON<br><b>121.8</b> | CLNC DEL<br><b>125.55</b> | UNICOM<br><b>122.95</b> |
|-----------------------|---|--|-------------------------|---------------------------|-------------------------|

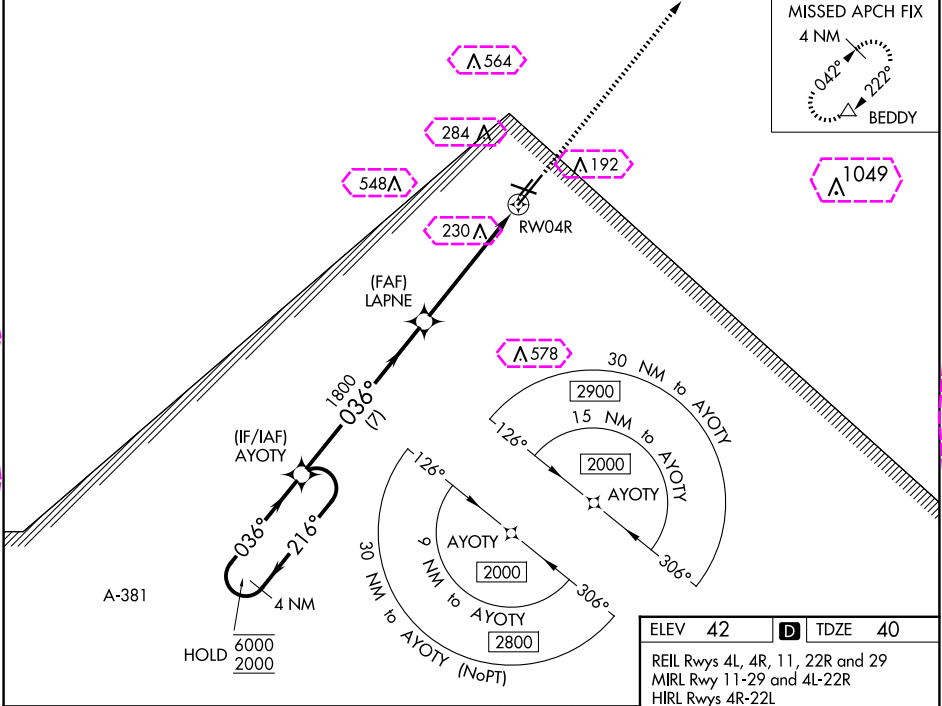

|                            |                     |                            |  |
|----------------------------|---------------------|----------------------------|--|
| 4 NM Holding Pattern AYOTY |                     | 2000 BEDDY                 |  |
| 6000 ← 216°                |                     | 1800                       |  |
| 2000 → 036°                |                     | * 1.3 NM to RW04R          |  |
| GP 3.00° TCH 49            |                     | * LNAV only.               |  |
| 7 NM                       |                     | 4.1 NM                     |  |
| CATEGORY                   | A                   | B                          | C  |
| LPV DA                     | 317- $\frac{7}{8}$  | 277 (300- $\frac{7}{8}$ )  |  |
| LNAV/VNAV DA               | 440-1 $\frac{1}{8}$ | 400 (400-1 $\frac{1}{8}$ ) |  |
| LNAV MDA                   | 500-1               | 460 (500-1)                | 500-1 $\frac{3}{8}$ 460 (500-1 $\frac{3}{8}$ )                   |
| CIRCLING                   | 500-1 458 (500-1)   | 580-1 538 (600-1)          | 700-1 $\frac{3}{4}$ 658 (700-1 $\frac{3}{4}$ ) 700-2 658 (700-2) |

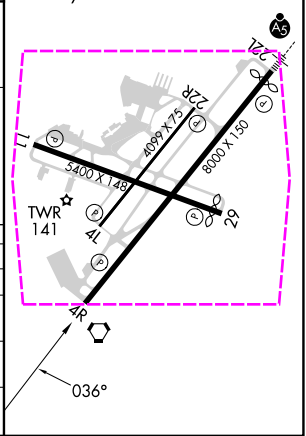

LAFAYETTE, LOUISIANA  
Amdt 2 20JUN19

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)  
30°12'N-91°59'W  
RNAV (GPS) RWY 4R

LAFAYETTE, LOUISIANA

AL-865 (FAA)

25219


|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>45903</b><br><b>W04A</b> | APP CRS<br><b>036°</b> | Rwy Ldg<br>TDZE <b>40</b><br>Apt Elev <b>42</b> |
|--|------------------------|---|

RNAV (GPS) RWY 4R

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)

|  |  |   |  |
|--|--|---|--|
| RNP APCH.  |  | MISSED APPROACH: Climb to 2000 direct BEDDY and hold. |  |
| Rwy 4R helicopter visibility reduction below ¾ SM NA.<br>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. |  |   |  |

|                       |   |  |                         |                           |                         |
|-----------------------|---|--|-------------------------|---------------------------|-------------------------|
| ATIS<br><b>134.05</b> | LAFAYETTE APP CON ★<br><b>121.1 363.0</b> | LAFAYETTE TOWER ★<br><b>118.5 (CTAF) 257.8</b> | GND CON<br><b>121.8</b> | CLNC DEL<br><b>125.55</b> | UNICOM<br><b>122.95</b> |
|-----------------------|---|--|-------------------------|---------------------------|-------------------------|

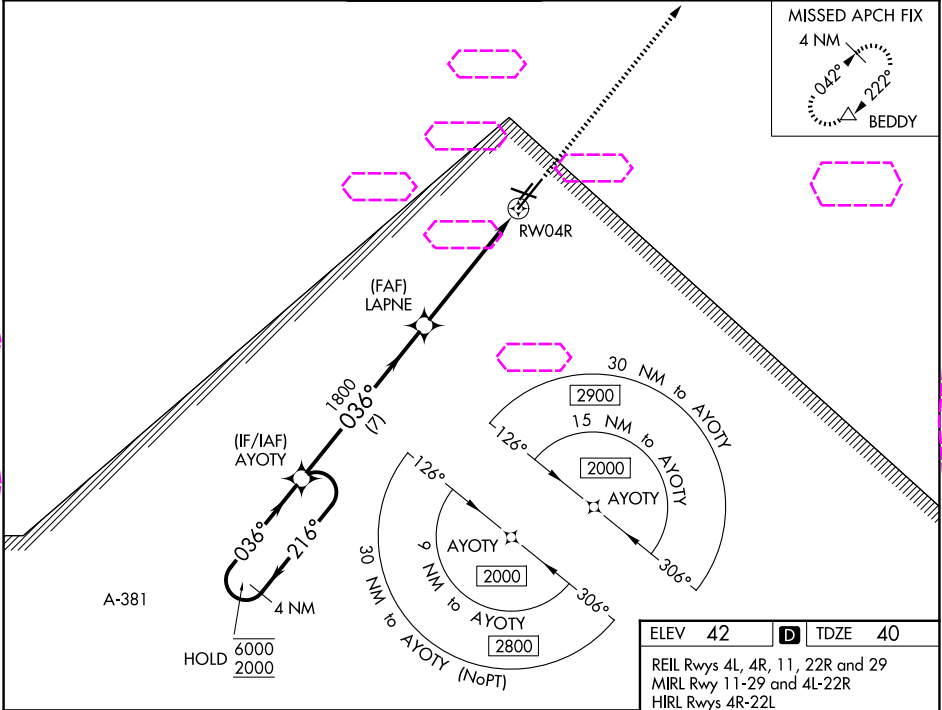

|                            |                      |                      |                              |
|----------------------------|----------------------|----------------------|------------------------------|
| 4 NM Holding Pattern AYOTY |                      | 2000 BEDDY           |                              |
| 6000 ← 216°<br>2000 → 036° |                      | * 1.3 NM to RW04R    |                              |
| GP 3.00°<br>TCH 49         |                      | * LNAV only.         |                              |
| 7 NM                       |                      | 4.1 NM               |                              |
| CATEGORY                   | A                    | B                    | C                            |
| LPV DA                     | 317-7/8              | 277 (300-7/8)        |                              |
| LNAV/VNAV DA               | 440-1 1/8            | 400 (400-1 1/8)      |                              |
| LNAV MDA                   | 500-1                | 460 (500-1)          | 500-1 3/8 460 (500-1 3/8)    |
| CIRCLING                   | 500-1<br>458 (500-1) | 580-1<br>538 (600-1) | 700-1 3/4<br>658 (700-1 3/4) |

