

ST. LOUIS, MISSOURI

AL-5400 (FAA)

25219

LOC IFZU 111.1	APP CRS 259°	Rwy Ldg 7005
		TDZE 462
		Apt Elev 463

ILS or LOC RWY 26L


SPIRIT OF ST LOUIS (SUS)

⚠ When local alimeter setting not received, use St Louis Lambert Intl alimeter setting:
increase S-ILS 26L DA to 705 feet; increase all MDAs 60 feet and S-LOC 26L visibility
Cat C and D $\frac{1}{2}$ SM and Circling visibility C $\frac{1}{4}$ SM. For inop ALS, increase S-LOC 26L Cats C
and D visibility to 1 $\frac{1}{2}$ SM. For inop ALS when using St Louis Lambert Intl alimeter setting,
increase S-LOC 26L Cats C and D visibility to 2 SM. *RVR 1800 authorized with use of FD
or AP or HUD to DA (NA when using St Louis Lambert Intl alimeter setting).


MALSR

MISSED APPROACH:
Climb to 2400 then
right turn direct FTZ
VORTAC and hold.

ATIS 134.8	ST. LOUIS APP CON 126.5 254.3	SPIRIT TOWER* 124.75 (CTAF) 0 257.2	GND CON 121.7	CLNC DEL 133.1	ST. LOUIS CLNC DEL 121.7 (when tower closed)	UNICOM 122.95
----------------------	-----------------------------------------	-----------------------------------------------	-------------------------	--------------------------	-----------------------------------------------------------	-------------------------

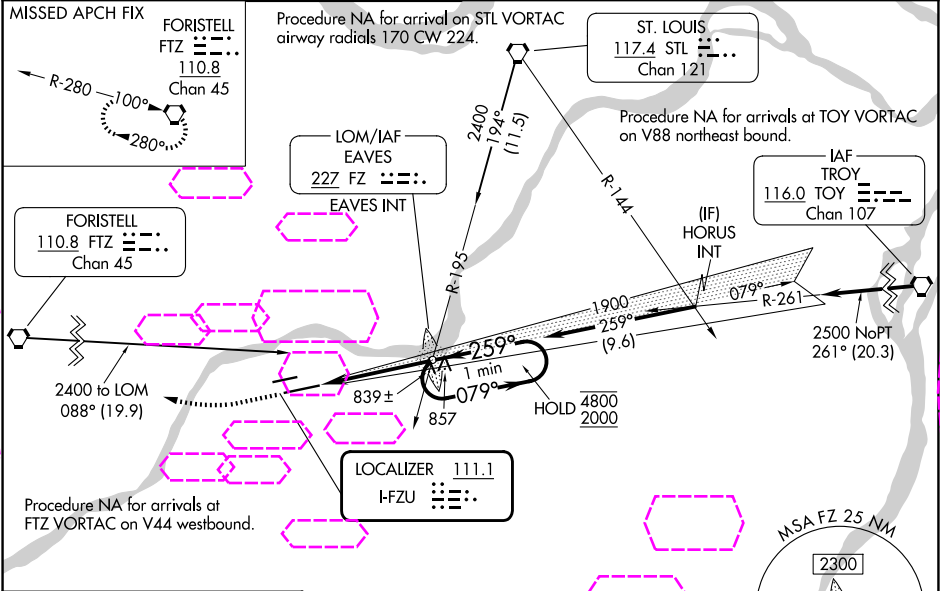

ELEV 463	D	TDZE 462
----------	---	----------

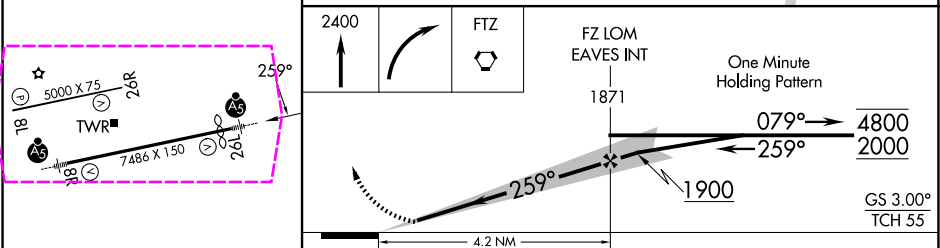

CATEGORY	A	B	C	D
S-ILS 26L *	662/24 200 (200- $\frac{1}{2}$)			
S-LOC 26L	1140/24	678 (700- $\frac{1}{2}$)	1140-1 $\frac{1}{2}$	678 (700-1 $\frac{1}{2}$)
CIRCLING	1140-1	677 (700-1)	1180-2 717 (800-2)	1360-3 897 (900-3)