

WAAS CH <b>53618</b> <b>W10A</b>	APP CRS <b>097°</b>	Rwy ldg <b>4750</b> TDZE <b>756</b> Apt Elev <b>759</b>
--	------------------------	---


# RNAV (GPS) RWY 10

DUPAGE (DPA)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Aurora altimeter setting: increase LPV DA to 993 feet and LNAV/VNAV DA to 1281; increase all MDA 40 feet and visibility LNAV Cat D and Circling Cat C/D ¼ SM. VDP and Baro-VNAV NA when using Aurora altimeter setting. Circling Rwy 15, 28, 33 NA at night.

**MISSED APPROACH:** Climb to 2600 direct PEPRE and right turn on track 204° to JOT VOR/DME and hold.



ATIS <b>132.075</b>	CHICAGO APP CON <b>133.5 349.0</b>	DUPAGE TOWER <b>120.9 257.8</b>	GND CON <b>121.8</b>	CLNC DEL <b>119.75</b>
------------------------	---------------------------------------	------------------------------------	-------------------------	---------------------------

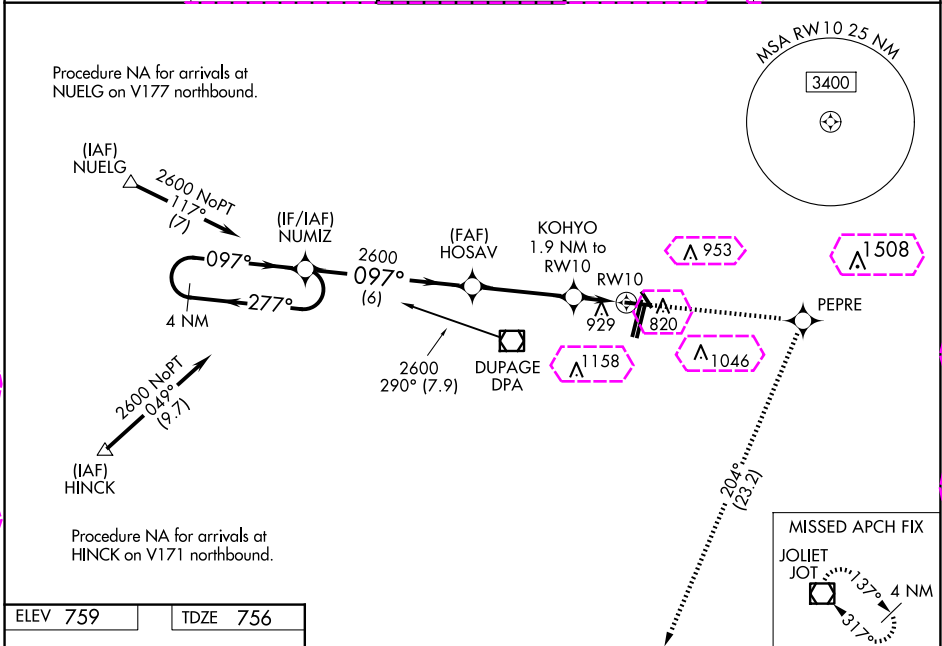

EC-3: 30 OCT 2025 to 27 NOV 2025

EC-3: 30 OCT 2025 to 27 NOV 2025

ELEV 759	TDZE 756
----------	----------

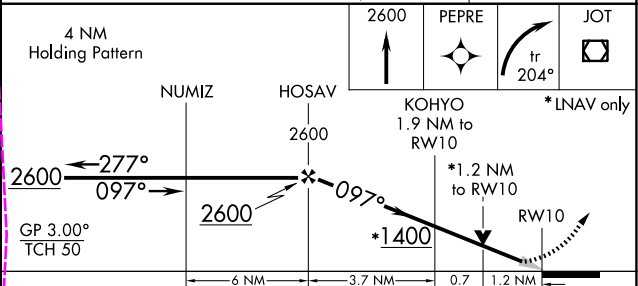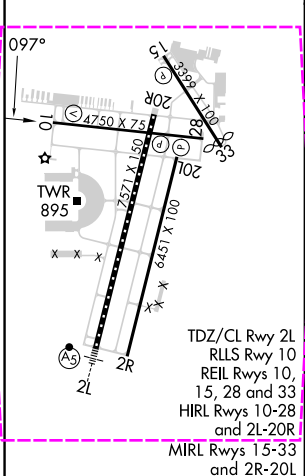

CATEGORY	A	B	C	D
LPV DA		956-¾	200 (200-¾)	
LNAV/VNAV DA		1244-1¾	488 (500-1¾)	
LNAV MDA	1180-1	424 (500-1)	1180-1¼	424 (500-1¼)
CIRCLING	1260-1 501 (600-1)	1360-1 601 (700-1)	1460-2 701 (800-2)	1460-2¼ 701 (800-2¼)

WAAS CH <b>53618</b> <b>W10A</b>	APP CRS <b>097°</b>	Rwy Ldg <b>4750</b> TDZE <b>756</b> Apt Elev <b>759</b>
--	------------------------	---


# RNAV (GPS) RWY 10

DUPAGE (DPA)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Aurora altimeter setting: increase LPV DA to 993 feet and LNAV/VNAV DA to 1281; increase all MDA 40 feet and visibility LNAV Cat D and Circling Cat C/D ¼ SM. VDP and Baro-VNAV NA when using Aurora altimeter setting. Circling Rwy 15, 28, 33 NA at night.

**MISSED APPROACH:** Climb to 2600 direct PEPRE and right turn on track 204° to JOT VOR/DME and hold.



ATIS <b>132.075</b>	CHICAGO APP CON <b>133.5 349.0</b>	DUPAGE TOWER <b>120.9 257.8</b>	GND CON <b>121.8</b>
------------------------	---------------------------------------	------------------------------------	-------------------------

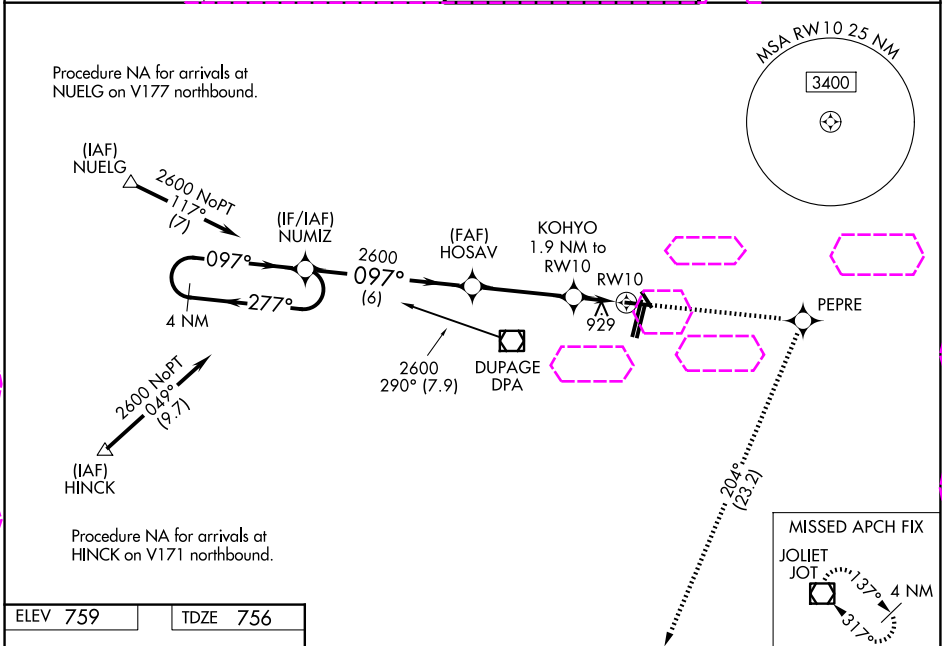

EC-3: 127 NOV 2025 to 25 DEC 2025

EC-3: 27 NOV 2025 to 25 DEC 2025

ELEV 759	TDZE 756
----------	----------

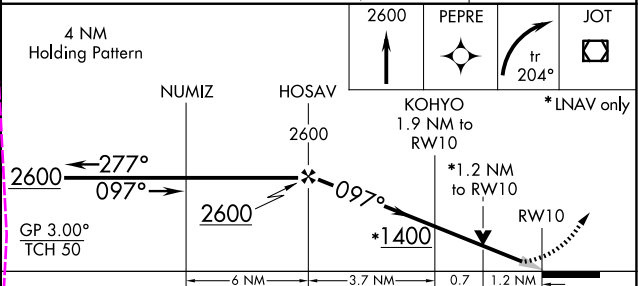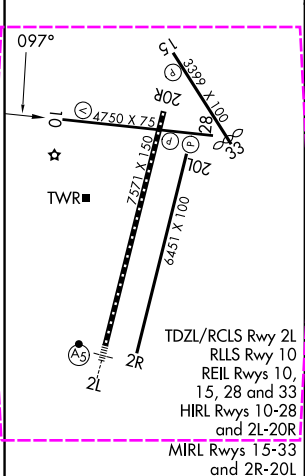

CATEGORY	A	B	C	D
LPV DA		956-¾	200 (200-¾)	
LNAV/VNAV DA		1244-1¾	488 (500-1¾)	
LNAV MDA	1180-1	424 (500-1)	1180-1¼	424 (500-1¼)
CIRCLING	1260-1 501 (600-1)	1360-1 601 (700-1)	1460-2 701 (800-2)	1460-2¼ 701 (800-2¼)