DAYTON, OHIO

ILS or LOC RWY 5L

LOC I-FAE	APCH CRS	Rwy Idg 12,600 TDZE 803 Arpt Elev 823
109.7	053°	

[USAF] WRIGHT-PATTERSON AFB (KFFO)

DME or RADAR required for Localizer.

▼ * When ALS inop, increase RVR to 40 and vis to ¾ mile.

ALSF-1

†MISSED APPROACH: Climb to 2000 via FFO R-053 at 5 DME, turn right direct CLACK climbing to 3100 and hold.

ATIS	COLUMBUS APP CON	PATTERSON TOWER	GND CON
124.475 269.9	118.85 269.275	127.8 281.45	121.8 335.8

** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1⅜ miles.

*** When Rwy 23R VGSI inop, circling to Rwy 23R NA at night.

†Missed approach requires use of RNAV or ATC RADAR monitoring.

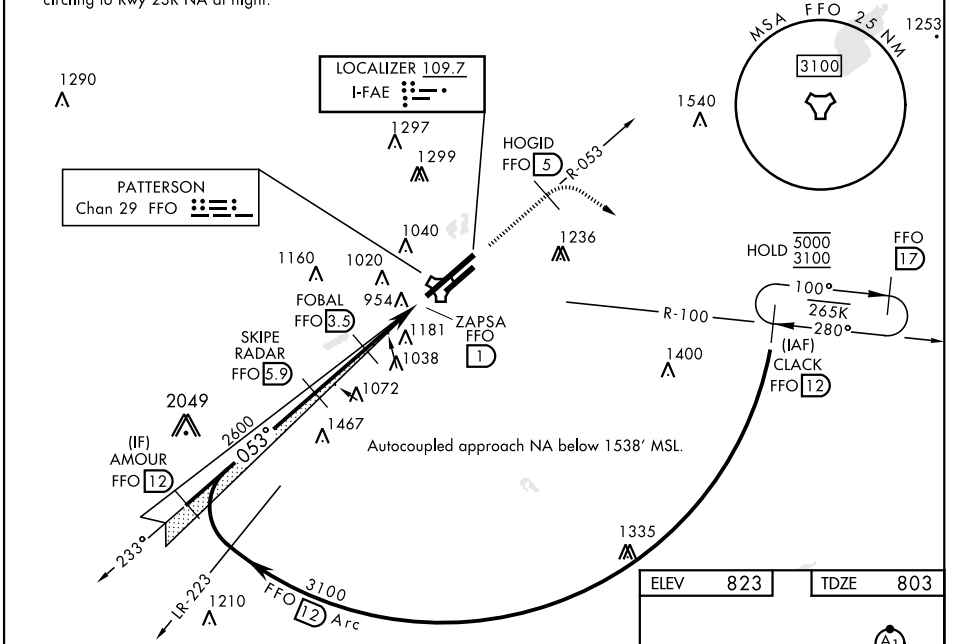

EMERG SAFE ALT 100 NM 3700

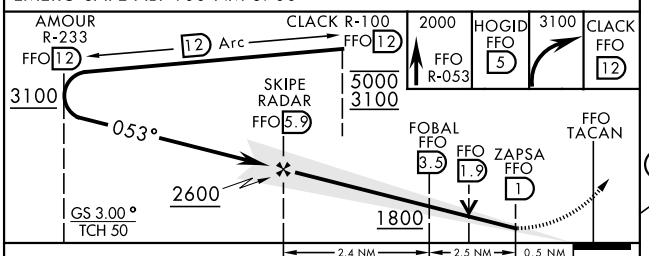

ELEV 823 TDZE 803



CATEGORY	A	B	C	D	E
S-ILS 5L*	1003/24 200 (200-½)				
S-LOC 5L**	1280/24 476 (500-½)		1280/50 476 (500-1)		
CIRCLING***	1380-1 557 (600-1)	1440-1 617 (700-1)	1560-2 737 (800-2)	1620-2½ 797 (800-2½)	1620-2¾ 797 (800-2¾)

HIRL Rwy 5L-23R
MIRL Rwy 5R-23L
1038

FAF to MAP 4.9 NM					
Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

DAYTON, OHIO
Amdt 4 28DEC23

39° 50'N-84° 03'W

WRIGHT-PATTERSON AFB (KFFO)

ILS or LOC RWY 5L

EC-2, 09 JUL 2026 to 06 AUG 2026
EC-2, 09 JUL 2026 to 06 AUG 2026