RNAV (GPS) Y RWY 35R
LOUISVILLE MUHAMMAD ALI INTL (SDF)

WAAS CH 70709 W35D	APP CRS 350°	Rwy Ldg 7800 TDZE 479 Apt Elev 501

RNP APCH - GPS.
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.
Use of FD or AP required during simultaneous operations. Circling Rwy 11 NA at night.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C.

ALSF-2

MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 direct TORAC and hold.

D-ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON
118.725	132.075 327.0	124.2 257.8	121.7 348.6

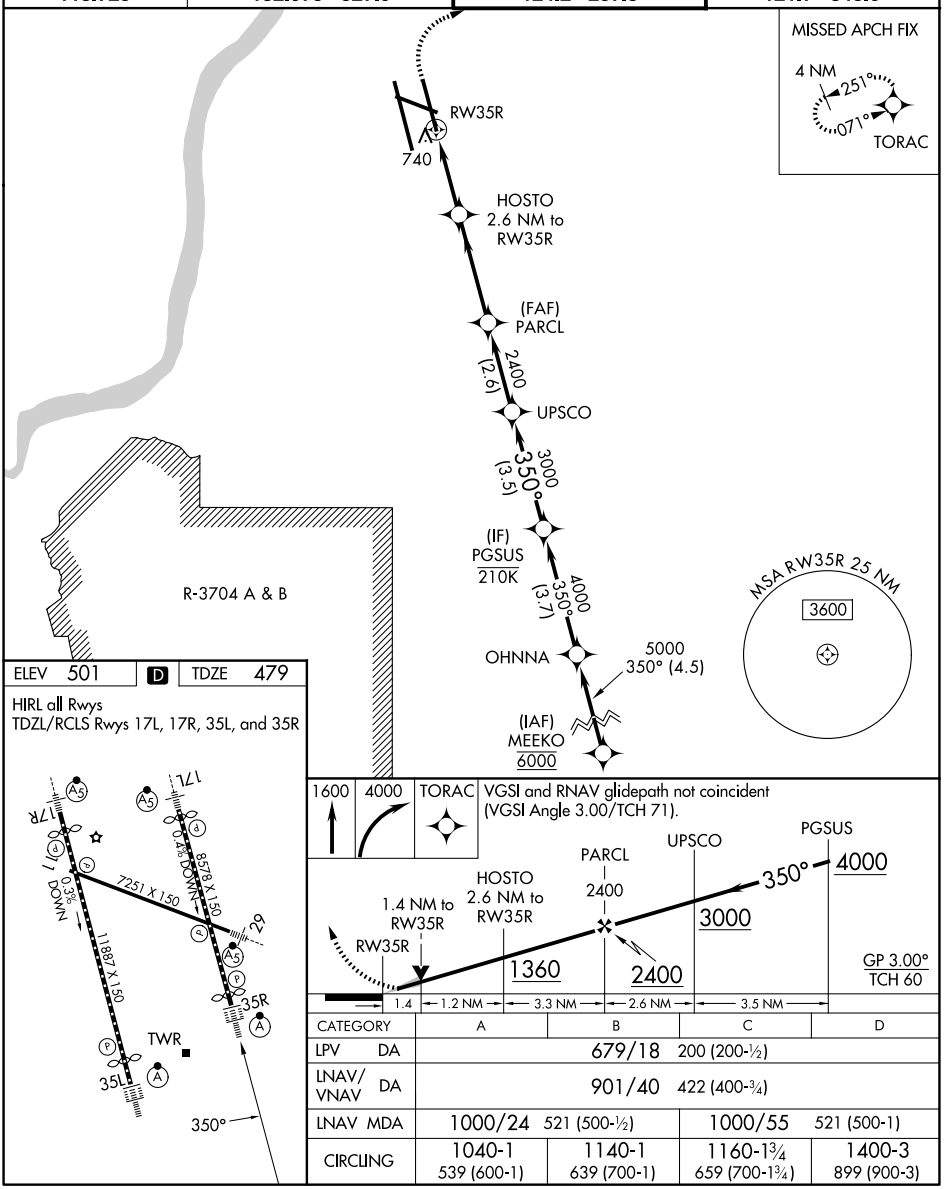

CATEGORY	A	B	C	D
LPV DA	679/18 200 (200-½)			
LNAV/VNAV DA	901/40 422 (400-¾)			
LNAV MDA	1000/24 521 (500-½)		1000/55 521 (500-1)	
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)

SE-1, 09 JUL 2026 to 06 AUG 2026
SE-1, 09 JUL 2026 to 06 AUG 2026