| WAAS CH 97722 W03A | APP CRS 030° | Rwy Ldg 8999 TDZE 1424 Apt Elev 1430 |
|---|---|---|

# RNAV (GPS) RWY 3

JOE FOSS FLD (FSD)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to 1⅜ SM.

ASR

-30°C

MALSR

MISSED APPROACH: Climb to 4000 direct MOPUE and hold.

| ATIS | SIOUX FALLS APP CON★ | SIOUX FALLS TOWER★ | GND CON | UNICOM |
|---|---|---|---|---|
| 126.6 | 125.8 284.725 | 118.3 (CTAF) L 257.8 | 121.9 348.6 | 122.95 |

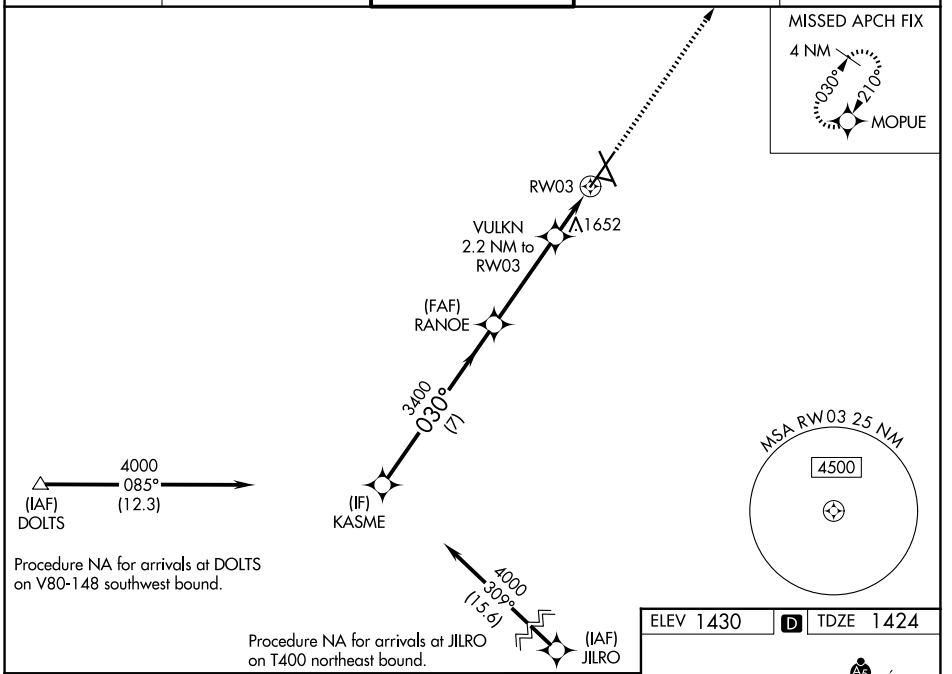


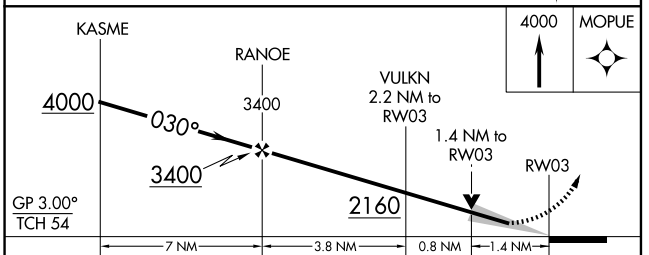


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1674/24 250 (300-½) | | | |
| LNAV/VNAV DA | 1741/24 317 (400-½) | | | |
| LNAV MDA | 1920/24 496 (500-½) | | 1920/50 496 (500-1) | |
| CIRCLING | 1980-1 550 (600-1) | | 2060-1¾ 630 (700-1¾) | 2200-2½ 770 (800-2½) |

ELEV 1430 D TDZE 1424

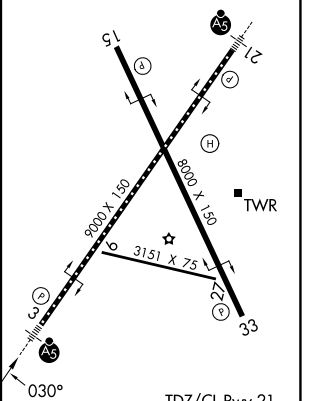


TDZ/CL Rwy 21
MIRL Rwy 9-27 L
REIL Rwys 15 and 33 L
HIRL Rwys 3-21 and 15-33 L



NC-1, 09 JUL 2026 to 06 AUG 2026
NC-1, 09 JUL 2026 to 06 AUG 2026