ILS or LOC RWY 23

KOKOMO MUNI (OKK)

LOC I-OKK	APP CRS	Rwy Ldg	6001
108.9	230°	TDZE	827
		Apt Elev	832

RADAR required for procedure entry.

T A NA For inop ALS, increase S-LOC 23 Cat C/D visibility to 1⅜ SM.
* DME from OKK

MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 2600 direct MZZ VOR/DME and hold.

AWOS-3PT	GRISSOM APP CON*	CLNC DEL	UNICOM
128.675	121.05 338.275	120.0	123.0 (CTAF) L

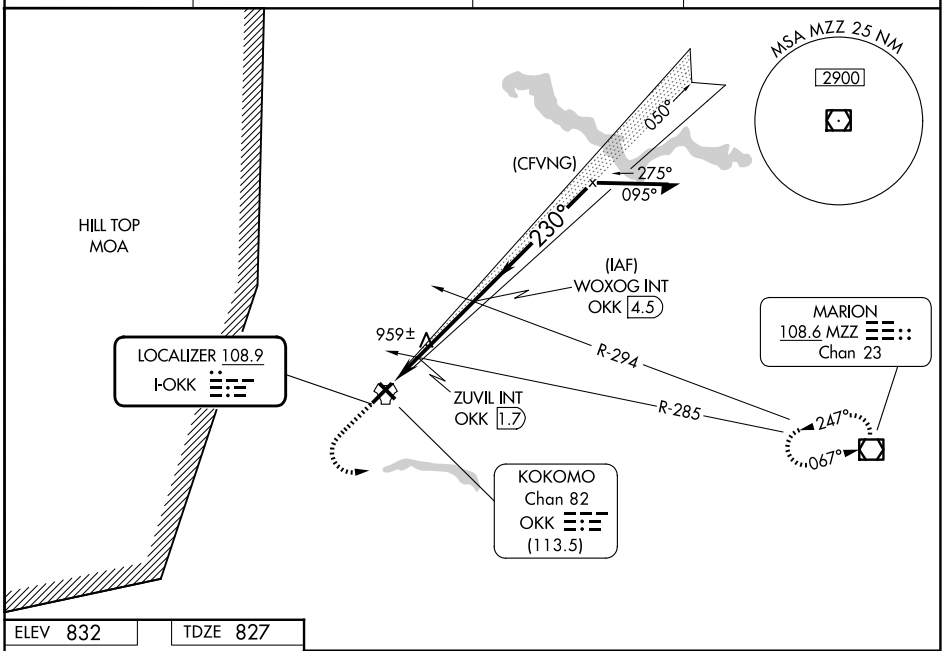

ELEV 832 TDZE 827



HIRL Rwy 5-23 L
MIRL Rwy 14-32 L
REIL Rwys 5, 14, and 32 L

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

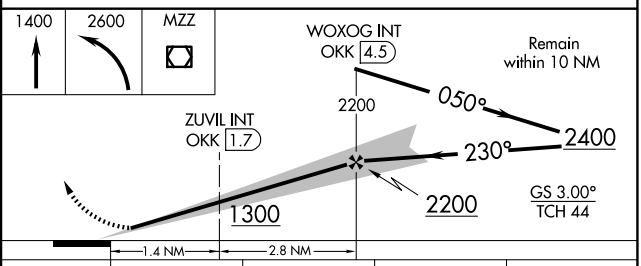

CATEGORY	A	B	C	D
S-ILS 23	1027-½ 200 (200-½)			
S-LOC 23	1300-½ 473 (500-½)		1300-1 473 (500-1)	
CIRCLING	1300-1 468 (500-1)		1400-1½ 568 (600-1½)	1420-2 588 (600-2)
ZUVIL FIX MINIMUMS* (DUAL VOR RECEIVERS or DME REQUIRED)				
S-LOC 23	1220-½ 393 (400-½)		1220-⅝ 393 (400-⅝)	
CIRCLING	1260-1 428 (500-1)	1300-1 468 (500-1)	1400-1½ 568 (600-1½)	1420-2 588 (600-2)

EC-2, 09 JUL 2026 to 06 AUG 2026
EC-2, 09 JUL 2026 to 06 AUG 2026