WAAS CH 77900 W13A	APP CRS 130°	Rwy Ldg 6701 / TDZE 1301 / Apt Elev 1304

RNAV (GPS) RWY 13
MITCHELL MUNI (MHE)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using HON altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use HON altimeter setting and increase LPV DA to 1664 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 1776 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3200 direct JUTUB and hold.

ASOS	MINNEAPOLIS CENTER	UNICOM
124.175	126.25 339.8	122.8 (CTAF) L

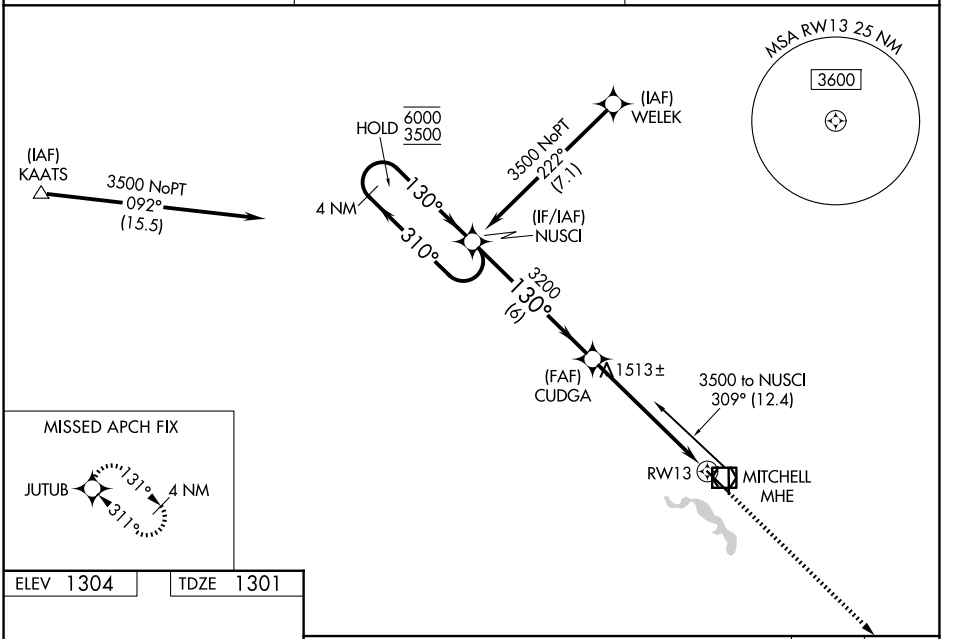



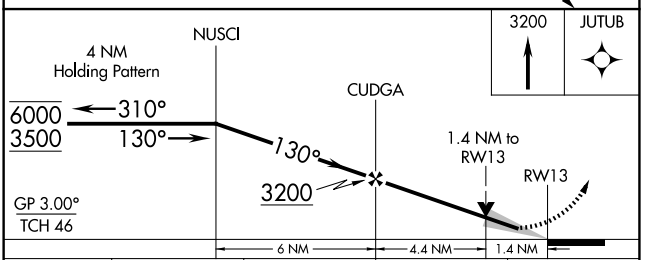

CATEGORY	A	B	C	D
LPV DA	1575-1 274 (300-1)			
LNAV/VNAV DA	1687-1¼ 386 (400-1¼)			
LNAV MDA	1780-1 479 (500-1)		1780-1⅜ 479 (500-1⅜)	
CIRCLING	1780-1¼ 476 (500-1¼)		1820-1½ 516 (600-1½)	1880-2 576 (600-2)

HIRL Rwy 13-31 L
MIRL Rwy 18-36 L
REIL Rwys 13 and 18 L

NC-1, 09 JUL 2026 to 06 AUG 2026
NC-1, 09 JUL 2026 to 06 AUG 2026