APP CRS	Rwy Ldg	11000
174°	TDZE	51
	Apt Elev	51

RNAV (RNP) Z RWY 17

ELLISON ONIZUKA KONA INTL AT KEAHOLE (KOA) (PHKO)

RNP AR APCH - GPS, RF. Authorization required.

For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C. For inop ALS, increase RNP 0.10 all Cats visibility to ¾ SM, and RNP 0.24 all Cats visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 5000 on track 174° to WOPNA and right turn to NANLE, and on track 358° to ANDES and hold.

ATIS	HCF CENTER	KONA TOWER ★	GND CON
127.4	118.45 278.3	120.3 (CTAF) L 254.3	121.9

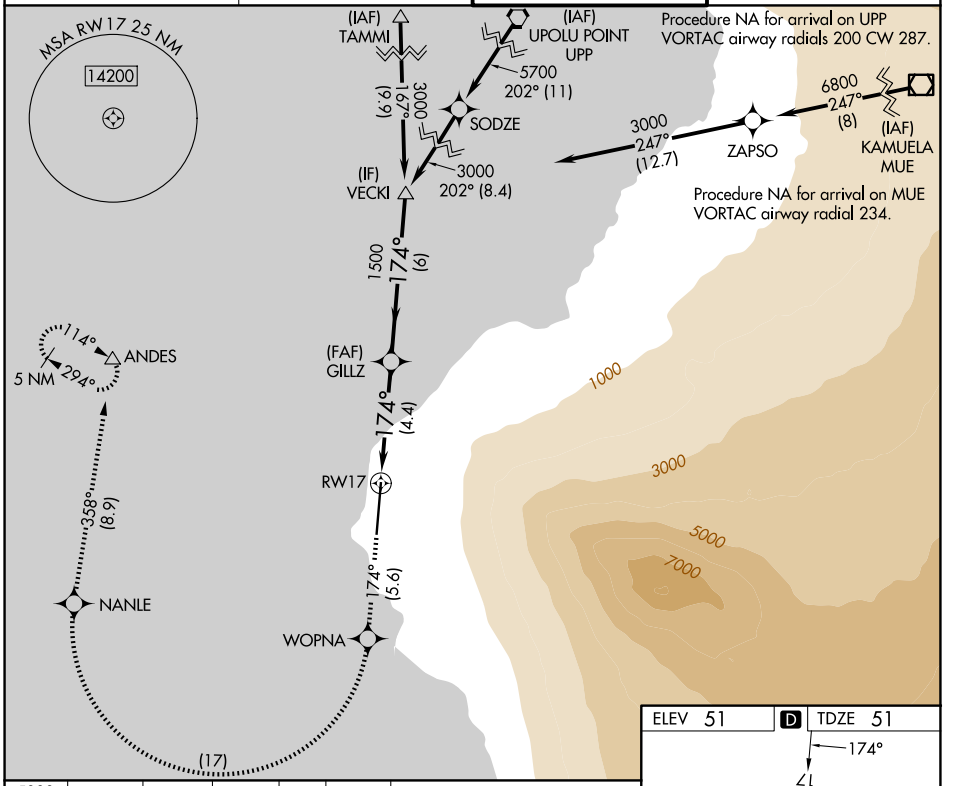

5000 ↑ tr 174°	WOPNA		NANLE	tr 358°	ANDES

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).

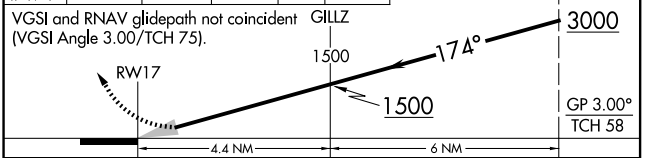

CATEGORY	A	B	C	D
RNP 0.10 DA	301-½ 250 (300-½)			
RNP 0.24 DA	351-½ 300 (300-½)			
RNP 0.30 DA	450-⅝ 399 (400-⅝)			

AUTHORIZATION REQUIRED

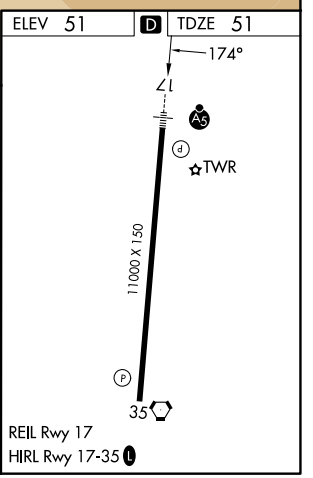

PAC, 09 JUL 2026 to 03 SEP 2026
PAC, 09 JUL 2026 to 03 SEP 2026