WAAS	APP CRS	Rwy Ldg	3399
CH 86532	332°	TDZE	1125
W33A		Apt Elev	1127

RNAV (GPS) RWY 33

WASECA MUNI/MAYNARD RICHARD STENSRUD FLD (ACQ)

When local altimeter setting not received, use Owatonna altimeter setting and increase all MDAs 40 feet, increase LP and LNAV Cat C visibility ⅛ mile and Circling Cat C visibility ⅛ mile. DME/DME RNP-0.3 NA. Procedure NA at night. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 direct WITUD and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
118.425	135.0 306.9	122.8 (CTAF) L

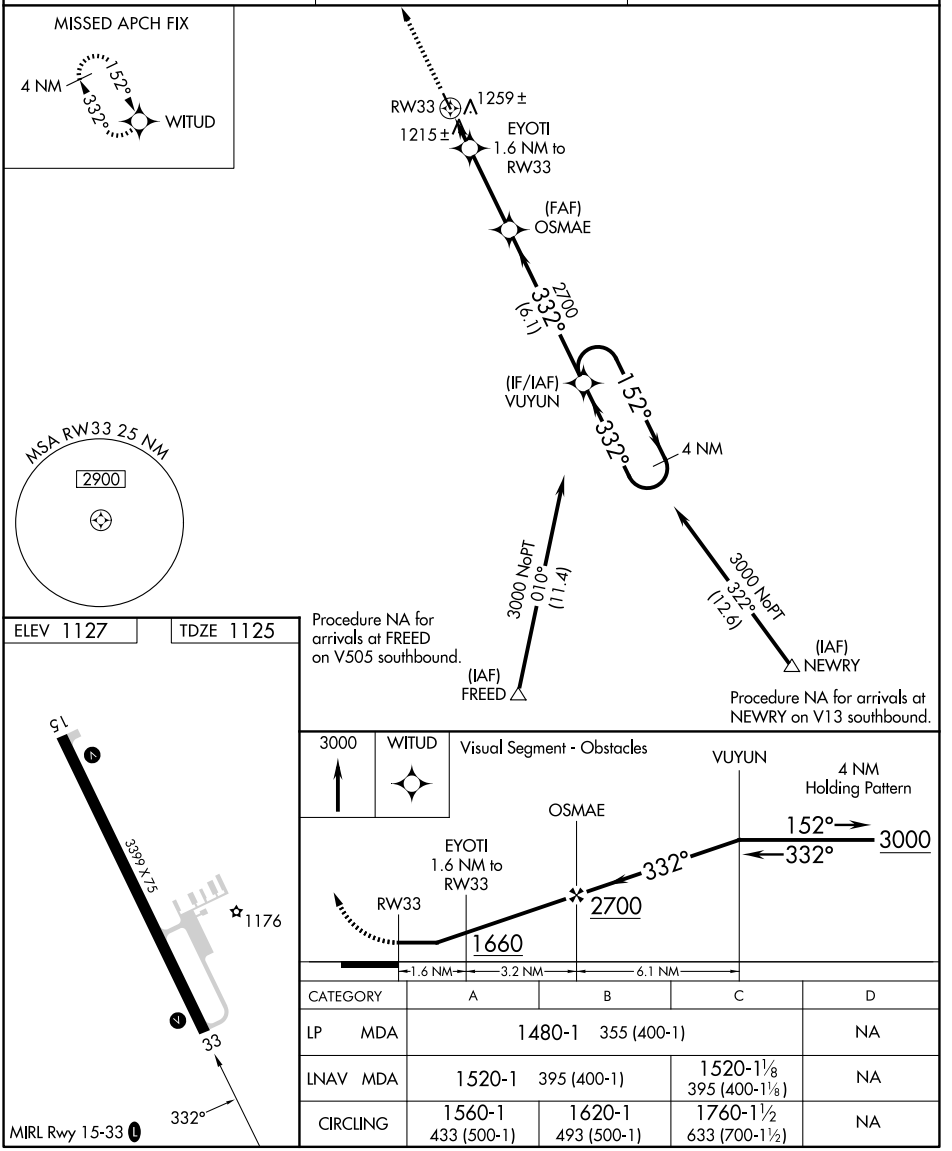

CATEGORY	A	B	C	D
LP MDA	1480-1 355 (400-1)			NA
LNAV MDA	1520-1 395 (400-1)		1520-1⅛ 395 (400-1⅛)	NA
CIRCLING	1560-1 433 (500-1)	1620-1 493 (500-1)	1760-1½ 633 (700-1½)	NA

NC-1, 09 JUL 2026 to 06 AUG 2026
NC-1, 09 JUL 2026 to 06 AUG 2026