OLD

JACKSONVILLE, FLORIDA

AL-5570 (FAA)

25331

RNAV (GPS) Z RWY 14

JACKSONVILLE INTL (JAX)

WAAS	APP CRS	Rwy Ldg	7701
CH 70626	136°	TDZE	27
W14A		Apt Elev	30

RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LPV visibility all Cats to ⅞ SM and increase LNAV/VNAV visibility all Cats and LNAV Cats A and B visibility to 1 SM. Rwy 14 helicopter visibility reduction below ¾ SM NA.

MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct YEJWO and hold.

D-ATIS	JACKSONVILLE APP CON	JACKSONVILLE TOWER	GND CON
125.85	119.0 269.9	118.3 317.7	121.9 348.6

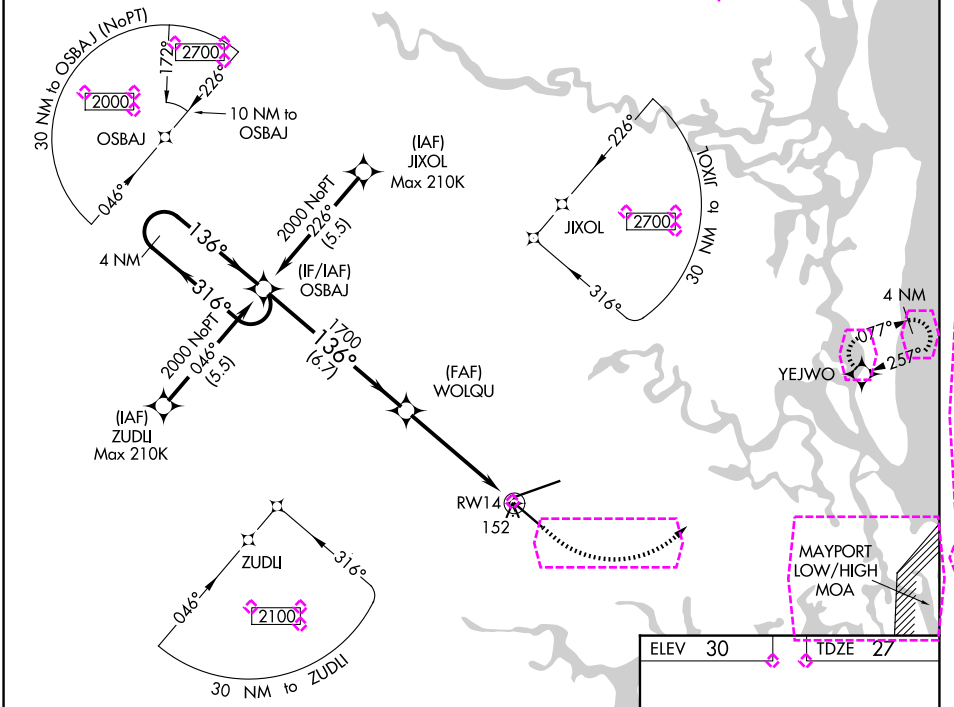

SE-3, 11 JUN 2026 to 09 JUL 2026

SE-3, 11 JUN 2026 to 09 JUL 2026

ELEV 30	TDZE 27

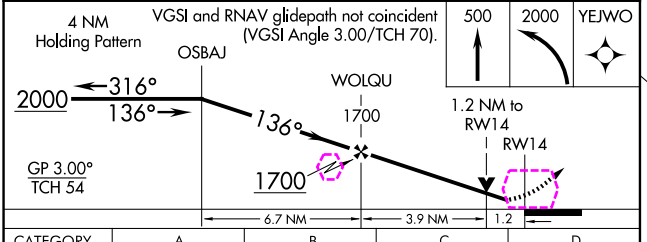



CATEGORY	A	B	C	D
LPV DA	306-¾	279 (300-¾)		
LNAV/VNAV DA	388-¾	361 (400-¾)		
LNAV MDA	480-¾	453 (500-¾)	480-⅞	453 (500-⅞)
CIRCLING	520-1	490 (500-1)	580-1½ 550 (600-1½)	580-2 550 (600-2)

REIL Rwy 32
TDZL/RCLS Rwys 8, 14, and 26
HIRL Rwys 8-26 and 14-32

NEW

JACKSONVILLE, FLORIDA

AL-5570 (FAA)

26190

RNAV (GPS) Z RWY 14

JACKSONVILLE INTL (JAX)

WAAS	APP CRS	Rwy Ldg	7701
CH 70626	136°	TDZE	27
W14A		Apt Elev	30

RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LPV visibility all Cats to ⅞ SM and increase LNAV/VNAV visibility all Cats and LNAV Cats A and B visibility to 1 SM. Rwy 14 helicopter visibility reduction below ¾ SM NA.

MALSR

MISSED APPROACH: Climb to 500 then climb ing left turn to 2000 direct YEJWO and hold.

D-ATIS	JACKSONVILLE APP CON	JACKSONVILLE TOWER	GND CON
125.85	119.0 269.9	118.3 317.7	121.9 348.6

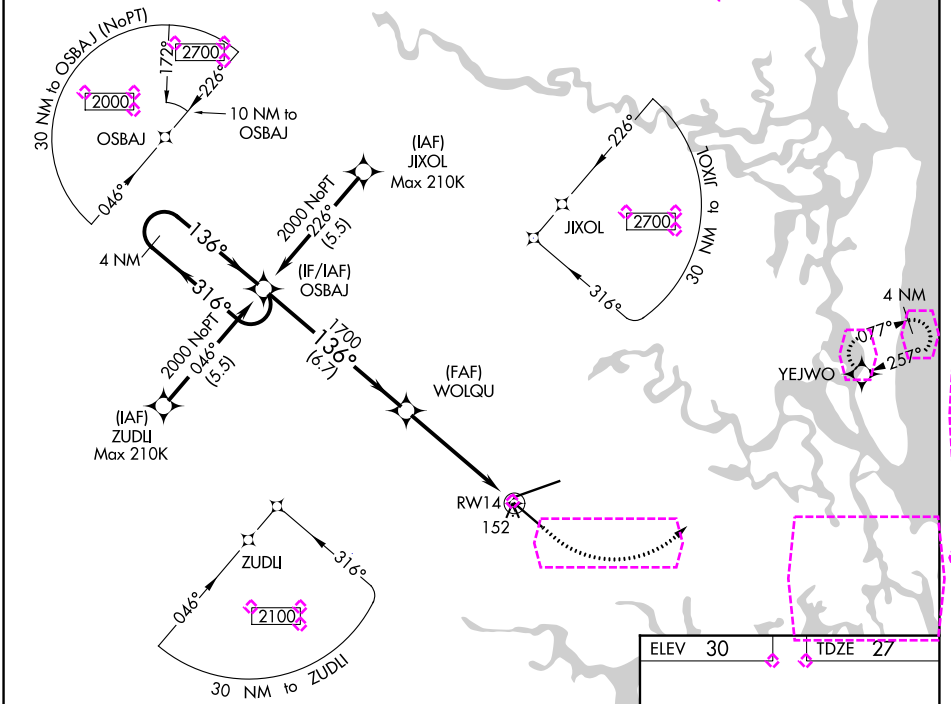

ELEV 30 | TDZE 27



REIL Rwy 32
TDZL/RCLS Rwys 8, 14, and 26
HIRL Rwys 8-26 and 14-32

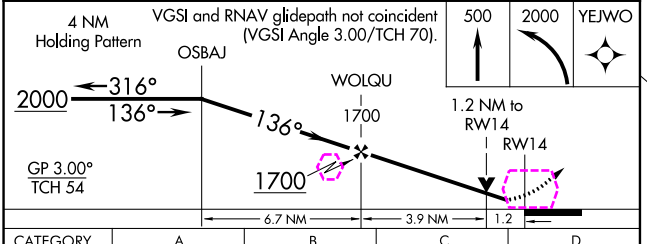

CATEGORY	A	B	C	D
LPV DA	306-¾	279 (300-¾)		
LNAV/VNAV DA	388-¾	361 (400-¾)		
LNAV MDA	480-¾	453 (500-¾)	480-⅞	453 (500-⅞)
CIRCLING	520-1	490 (500-1)	580-1½ 550 (600-1½)	580-2 550 (600-2)

SE-3, 09 JUL 2026 to 06 AUG 2026

SE-3, 09 JUL 2026 to 06 AUG 2026