RNAV (GPS) RWY 20

JACKSON RGNL (MKL)

WAAS CH 40312 W20A	APP CRS 203°	Rwy Ldg 6007 TDZE 418 Apt Elev 433

RNP APCH - GPS.

Rwy 20 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Baro-VNAV NA when using Dyersburg altimeter setting. When local altimeter setting not received, use Dyersburg altimeter setting: increase LPV DA to 802 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 910 feet and visibility all Cats ¼ SM; increase all MDA 100 feet and visibility LNAV Cat C and D and Circling Cat C ¼ SM, and Circling Cat D ½ SM.

MISSED APPROACH: Climb to 3000 direct ZIFFO and hold.

ASOS	MEMPHIS CENTER	JACKSON TOWER ★	GND CON	UNICOM
119.325	134.65 316.15	127.15 (CTAF) L 249.95	120.9	122.95

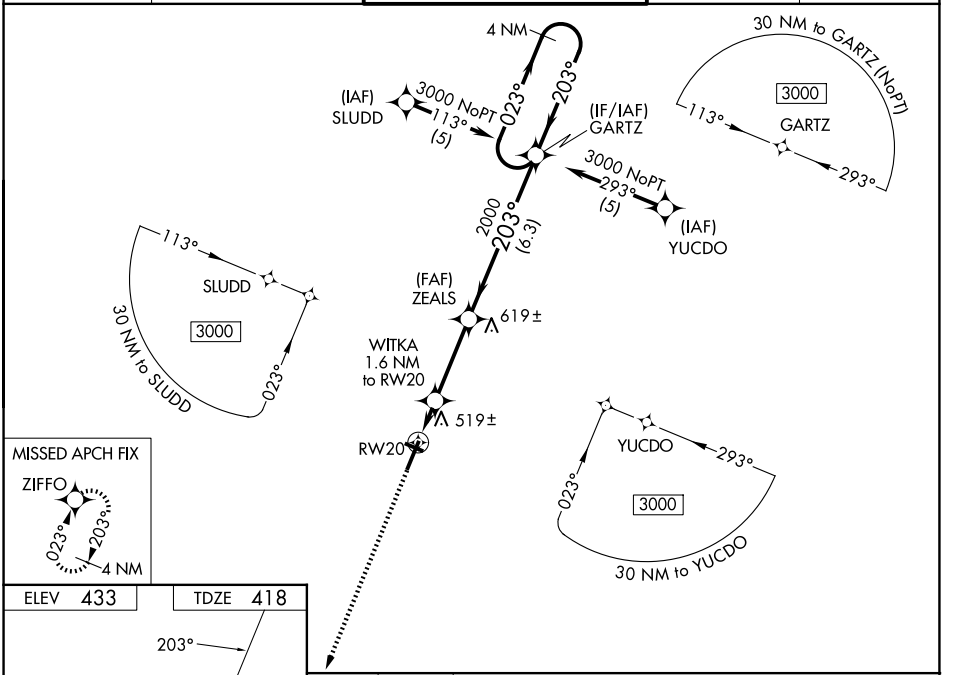

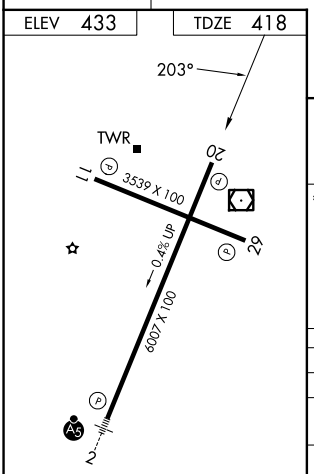

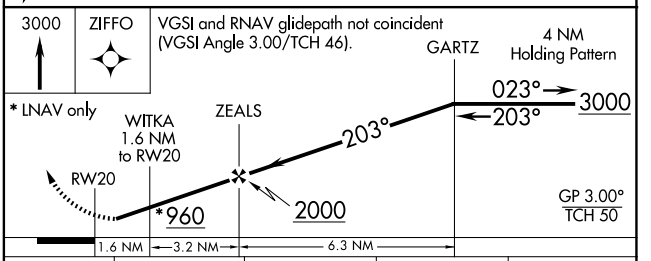

CATEGORY	A	B	C	D
LPV DA	710-1 292 (300-1)			
LNAV/VNAV DA	818-1½ 400 (400-1½)			
LNAV MDA	780-1 362 (400-1)			780-1¼ 362 (400-1¼)
CIRCLING	900-1 467 (500-1)	920-1 487 (500-1)	960-1½ 527 (600-1½)	1100-2 667 (700-2)

HIRL Rwy 2-20 L
MIRL Rwy 11-29 L

SE-1, 06 AUG 2026 to 03 SEP 2026
SE-1, 06 AUG 2026 to 03 SEP 2026