WAAS CH 50236 W13A	APP CRS 126°	Rwy Ldg 5007 TDZE 975 Apt Elev 975

RNAV (GPS) RWY 13

MARSHALLTOWN MUNI (MIW)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using GGI altimeter setting. Circling Rwy 18, 36 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use GGI altimeter setting and increase LPV DA to 1289 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 1289 feet and all visibilities ⅛ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat D ¼ SM.

MISSED APPROACH: Climb to 2600 direct VUNDY and hold.

ASOS	DES MOINES APP CON ★	CLNC DEL	UNICOM
128.325	120.9	120.9	122.8 (CTAF) L

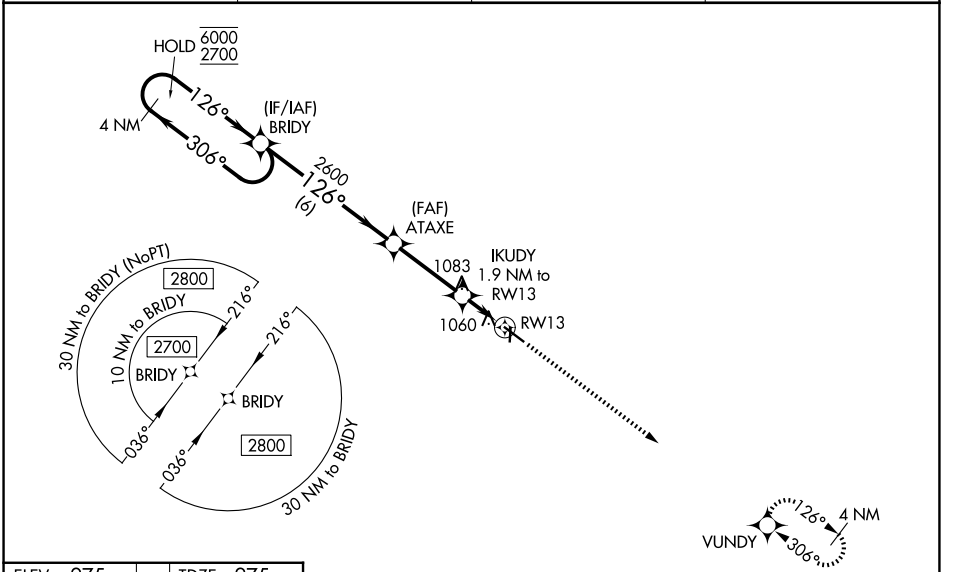

ELEV 975	TDZE 975



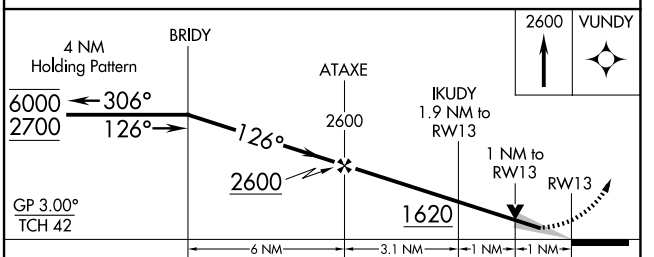

CATEGORY	A	B	C	D
LPV DA	1225-¾	250 (300-¾)		
LNAV/VNAV DA	1225-¾	250 (300-¾)		
LNAV MDA	1320-1	345 (400-1)		
CIRCLING	1400-1 425 (500-1)	1440-1 465 (500-1)	1460-1½ 485 (500-1½)	1840-2¾ 865 (900-2¾)

MIRL Rwys 13-31 and 18-36 L

REIL Rwys 13 and 31 L

NC-3, 06 AUG 2026 to 03 SEP 2026
NC-3, 06 AUG 2026 to 03 SEP 2026