WAAS	APP CRS	Rwy Ldg	5502
CH **86801**	**026°**	TDZE	**315**
W03A		Apt Elev	**315**

RNAV (GPS) RWY 3
SIKESTON MEML MUNI (SIK)

RNP APCH.

NA Rwy 3 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using Cape Girardeau altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C. When local altimeter setting not received, use Cape Girardeau altimeter setting and increase all DA 49 feet and all MDA 60 feet. Increase LNAV and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 2200 direct IBEFY and hold.

AWOS-3PT	MEMPHIS CENTER	UNICOM
119.175	**133.65 292.15**	**122.8** (CTAF) L

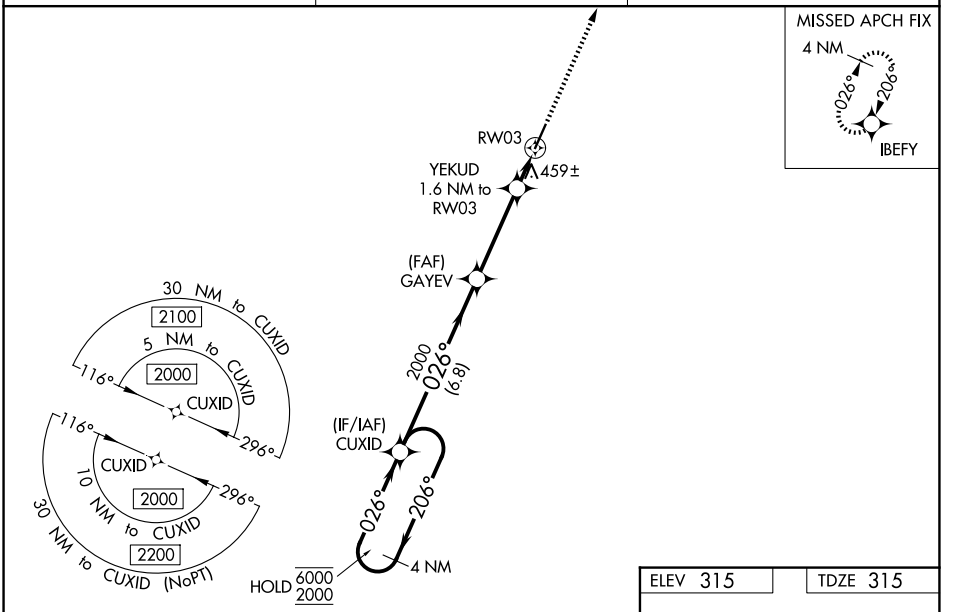

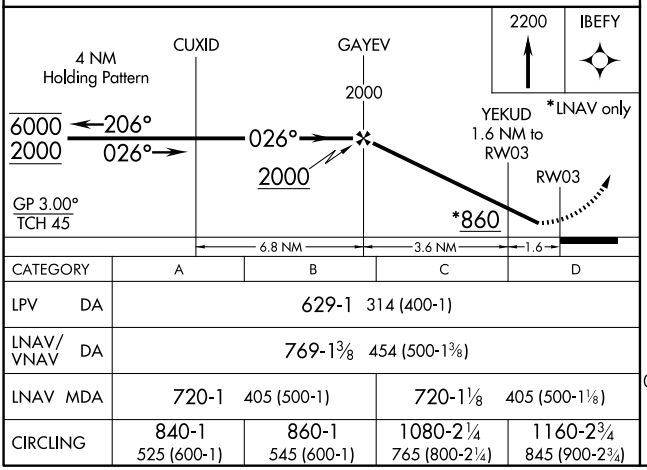

CATEGORY	A	B	C	D
LPV DA	629-1 314 (400-1)			
LNAV/VNAV DA	769-1⅜ 454 (500-1⅜)			
LNAV MDA	720-1 405 (500-1)		720-1⅛ 405 (500-1⅛)	
CIRCLING	840-1 525 (600-1)	860-1 545 (600-1)	1080-2¼ 765 (800-2¼)	1160-2¾ 845 (900-2¾)

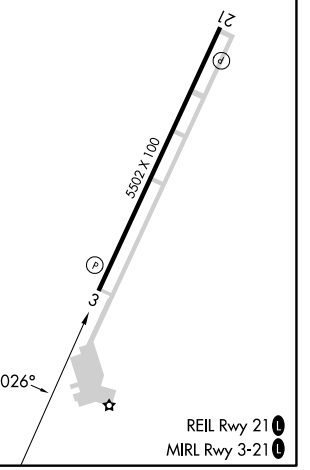

NC-3, 06 AUG 2026 to 03 SEP 2026
NC-3, 06 AUG 2026 to 03 SEP 2026