RNAV (GPS) RWY 35

HANNIBAL RGNL (HAE)

WAAS	APP CRS	Rwy Idg	4400
CH 72612	350°	TDZE	769
W35A		Apt Elev	769

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).
NA DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
When local altimeter setting not received, use Quincy altimeter setting; increase all DA 41 feet, all MDA 60 feet, and Circling Cat C visibility ¼ SM.
Baro-VNAV and VDP NA when using Quincy, IL altimeter setting.

MISSED APPROACH: Climb to 3000 direct DORUW and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
120.775	126.225 317.775	122.8 (CTAF) L

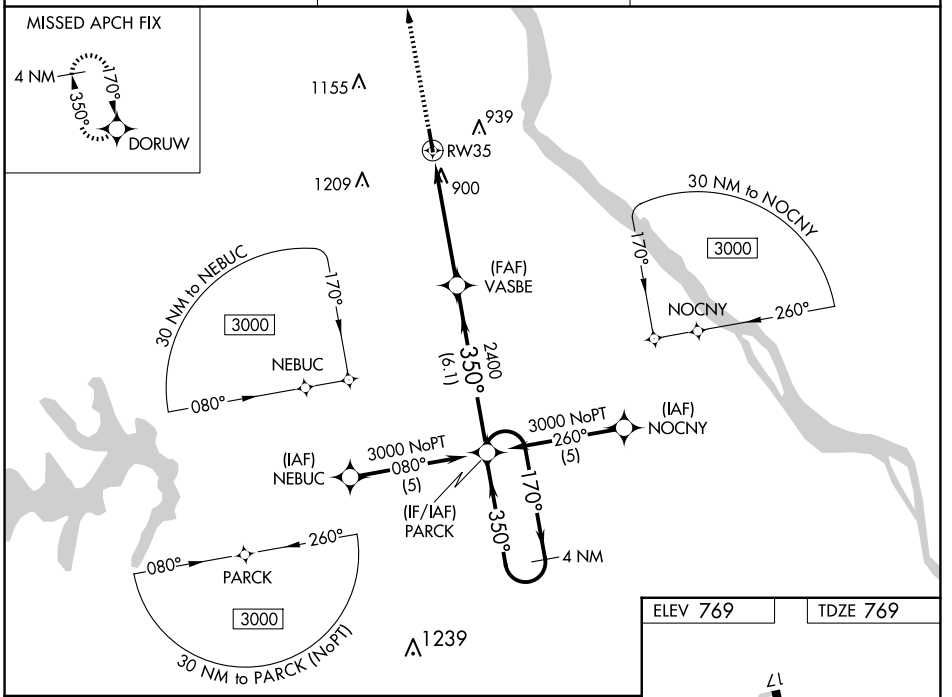

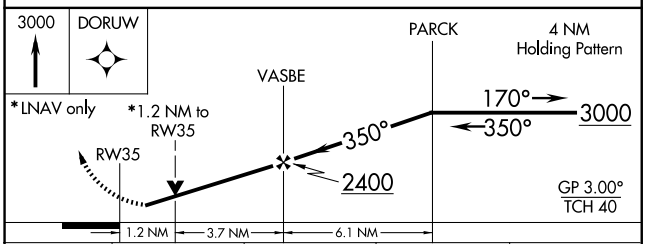

CATEGORY	A	B	C	D
LPV DA	1019-1 250 (300-1)			NA
LNAV/VNAV DA	1242-1¾ 473 (500-1¾)			NA
LNAV MDA	1200-1 431 (500-1)		1200-1¼ 431 (500-1¼)	NA
CIRCLING	1260-1 491 (500-1)		1640-2½ 871 (900-2½)	NA

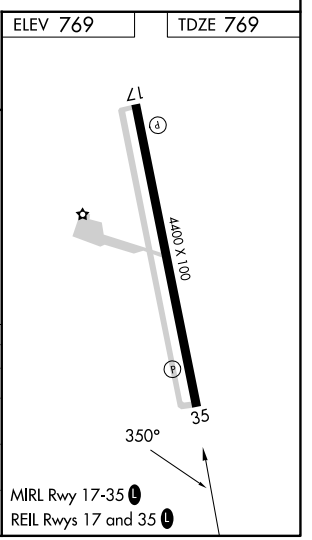

NC-3, 06 AUG 2026 to 03 SEP 2026
NC-3, 06 AUG 2026 to 03 SEP 2026