WAAS	APP CRS	Rwy Ldg	5387
CH 56416	339°	TDZE	322
W34A		Apt Elev	341

RNAV (GPS) RWY 34

HAWKINS FLD (HKS)

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Jackson-Medgar Wiley Evers Intl altimeter setting. When local altimeter setting not received, use Jackson-Medgar Wiley Evers Intl altimeter setting and increase all DA 19 feet and all MDA 20 feet. Increase LPV and LNAV/VNAV all Cats visibility ⅛ mile and Circling Cat C visibility ¼ mile. Rwy 34 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct OCARO and hold.

ASOS	JACKSON APP CON ★	HAWKINS TOWER ★	GND CON	CLNC DEL	UNICOM
120.625	123.9 319.2	119.65 (CTAF) L 257.8	121.9 239.0	121.9 (When twr closed)	122.95

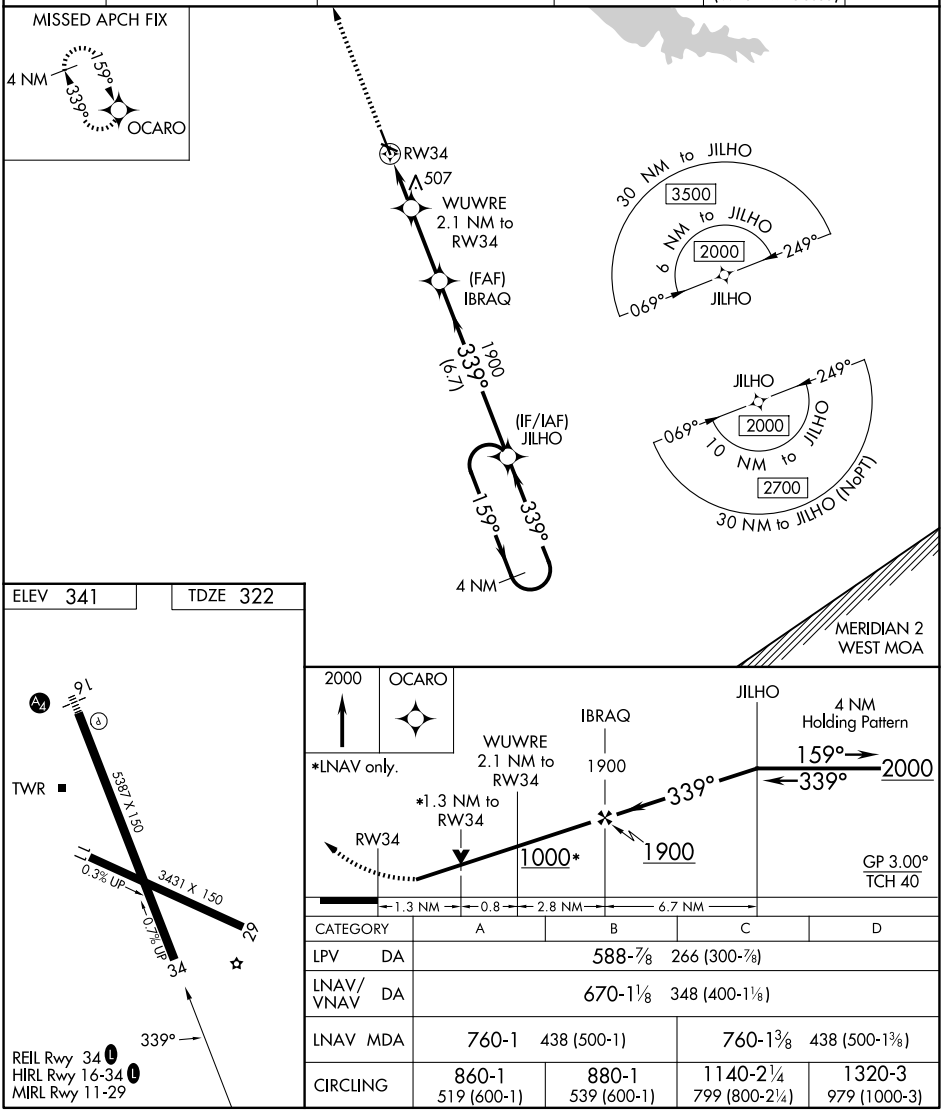

CATEGORY	A	B	C	D
LPV DA	588-⅞ 266 (300-⅞)			
LNAV/VNAV DA	670-1⅛ 348 (400-1⅛)			
LNAV MDA	760-1 438 (500-1)		760-1⅜ 438 (500-1⅜)	
CIRCLING	860-1 519 (600-1)	880-1 539 (600-1)	1140-2¼ 799 (800-2¼)	1320-3 979 (1000-3)

SC-4, 03 SEP 2026 to 01 OCT 2026
SC-4, 03 SEP 2026 to 01 OCT 2026