LOC/DME I-OSS	APP CRS	Rwy Ldg 8926
108.5	251°	TDZE 122
Chan 22		Apt Elev 128

ILS RWY 24R (CAT II & III)

LOS ANGELES INTL (LAX)

From CRCUS, SEAVU: RNAV 1-GPS required. DME or RADAR required.

Simultaneous approach authorized with HHR. Simultaneous approach authorized. RVR 1000 authorized with specific OPSPEC, MSPEC, or LOA approval and use of autoland or HUD to touchdown.

ALSF-2

MISSED APPROACH: Climb to 2000 on heading 251° and LAX VORTAC R-260 to RAFFS INT/LAX 15.1 DME and hold.

D-ATIS	SOCAL APP CON	LOS ANGELES TOWER	GND CON
133.8	124.3 363.2 (APCH from W) 124.9 269.0 (090°-224°) 124.5 235.975 (225°-044°) 128.5 360.7 (045°-089°)	133.9 239.3 (N) 120.95 379.1 (S)	121.65 327.0 (N) 121.75 327.0 (S) 121.4 327.0 (W)

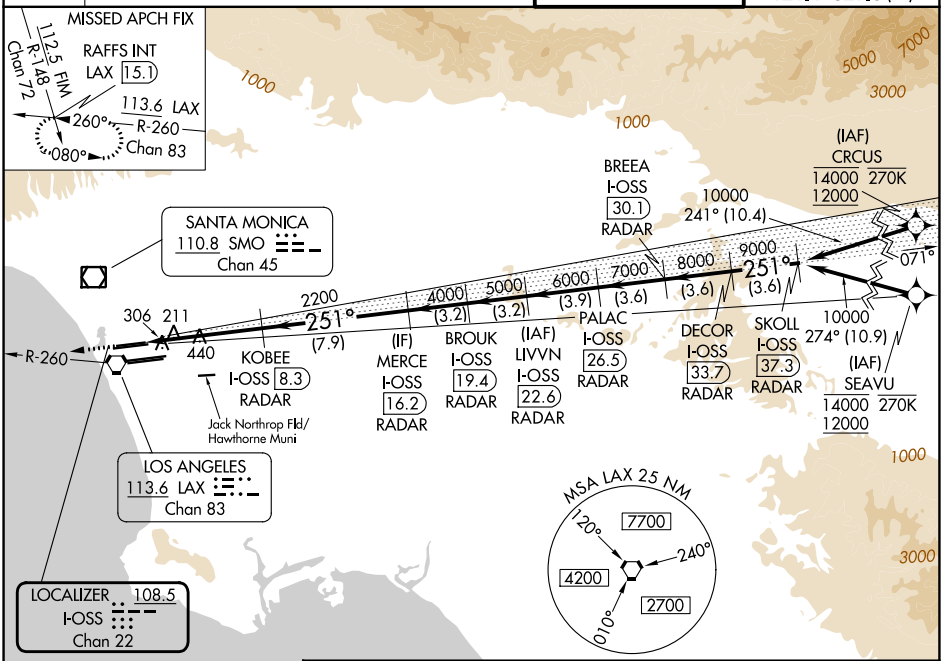

ELEV 128 | D | TDZE 122



TDZ/CL Rwys 6R, 7L, 24R, and 25L
HIRL all Rwys

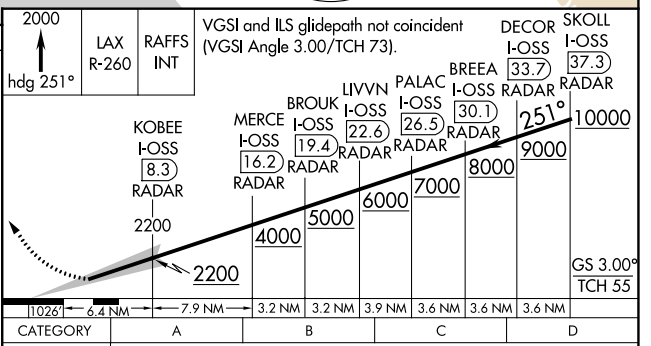

CATEGORY	A	B	C	D
S-ILS 24R	CAT II RA 118/10 100 DA 222			
S-ILS 24R	CAT III RVR 06			

CATEGORY II & III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

SW-3, 03 SEP 2026 to 01 OCT 2026
SW-3, 03 SEP 2026 to 01 OCT 2026