APP CRS	Rwy Ldg	11095
071°	TDZE	128
	Apt Elev	128

RNAV (RNP) Z RWY 7R
LOS ANGELES INTL (LAX)

For uncompensated Baro-VNAV systems, procedure NA below 5°C (41°F) or above 54°C (130°F). For inop MALSR, increase RNP 0.11 all Cats visibility to RVR 4500. Simultaneous approach authorized.

MALSR

MISSED APPROACH: Climb to 3000 on track 071° to ESINE and on track 071° to DOWNE and hold.

D-ATIS	SOCAL APP CON	LOS ANGELES TOWER	GND CON
133.8	124.3 363.2 (APCH from W) 124.9 269.0 (090°-224°) 124.5 235.975 (225°-044°) 128.5 360.7 (045°-089°)	133.9 239.3 (N) 120.95 379.1 (S)	121.65 327.0 (N) 121.75 327.0 (S) 121.4 327.0 (W)

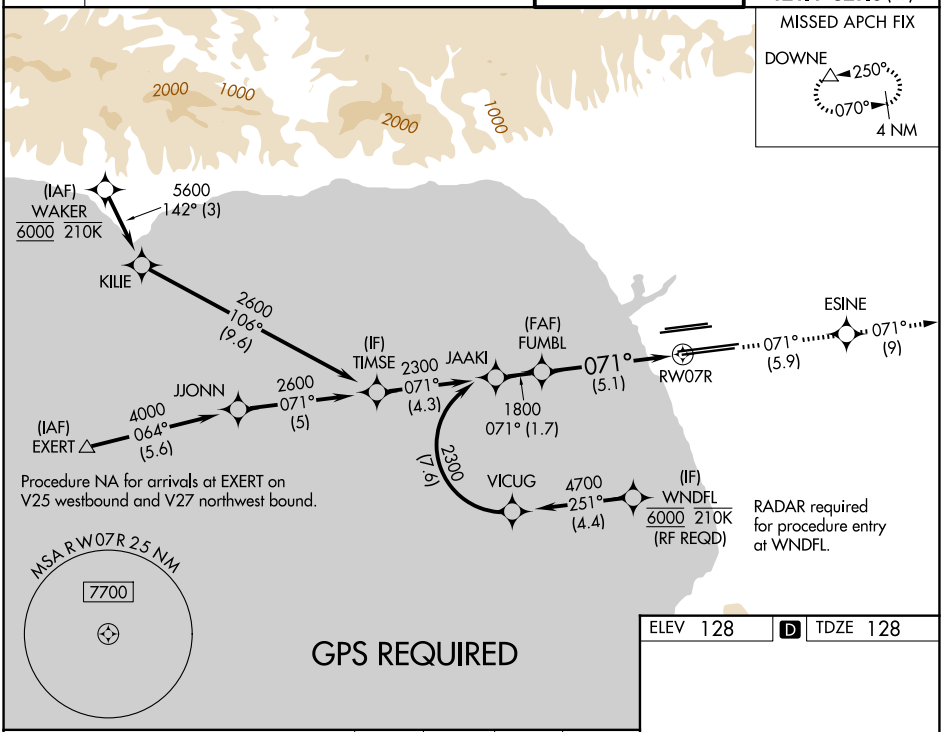

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 57).

3000	ESINE	tr	DOWNE
tr 071°		071°	

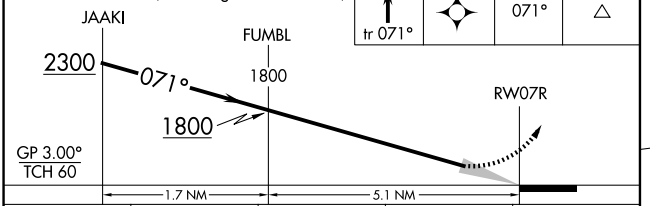

CATEGORY	A	B	C	D
RNP 0.11 DA	414/24	286 (300-½)		
RNP 0.30 DA	538/45	410 (500-⅞)		

AUTHORIZATION REQUIRED

ELEV 128 D TDZE 128



TDZ/CL Rwys 6R, 7L, 24R, and 25L
HIRL all Rwys

SW-3, 03 SEP 2026 to 01 OCT 2026
SW-3, 03 SEP 2026 to 01 OCT 2026